


PROBLEM SUMMARY

Sample Rating Trend

WEAR




Machine Id
VOLVO VNR64T640 26633
 Component
Front Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

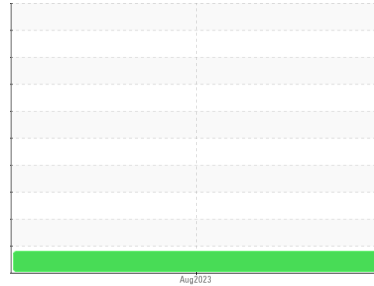

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

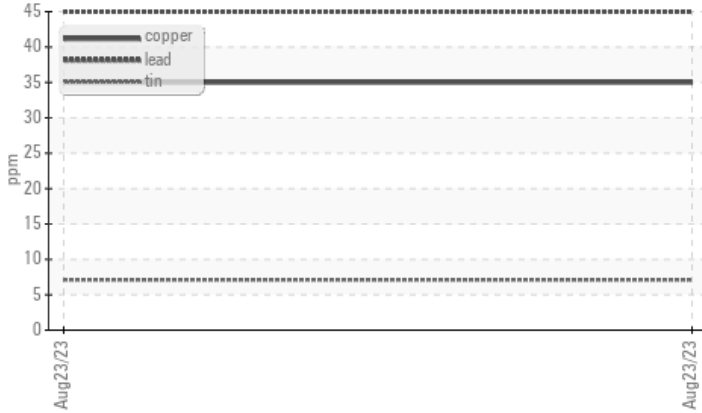

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Lead	ppm	ASTM D5185m	>25	▲ 45	---	---

Customer Id: PERDILSC
 Sample No.: PCA0104883
 Lab Number: 05939386
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com


RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

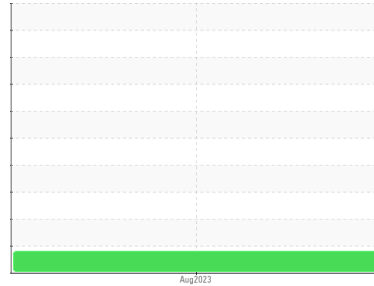

WEAR



Machine Id
VOLVO VNR64T640 26633
 Component
Front Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0104883	---	---
Sample Date	Client Info	23 Aug 2023	---	---
Machine Age	mls	Client Info	731428	---
Oil Age	mls	Client Info	731428	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	445	---
Chromium	ppm	ASTM D5185m >10	3	---
Nickel	ppm	ASTM D5185m >10	5	---
Titanium	ppm	ASTM D5185m	0	---
Silver	ppm	ASTM D5185m	0	---
Aluminum	ppm	ASTM D5185m >25	4	---
Lead	ppm	ASTM D5185m >25	▲ 45	---
Copper	ppm	ASTM D5185m >100	35	---
Tin	ppm	ASTM D5185m >10	7	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	176	---
Barium	ppm	ASTM D5185m 200	0	---
Molybdenum	ppm	ASTM D5185m 12	0	---
Manganese	ppm	ASTM D5185m	10	---
Magnesium	ppm	ASTM D5185m 12	<1	---
Calcium	ppm	ASTM D5185m 150	10	---
Phosphorus	ppm	ASTM D5185m 1650	1435	---
Zinc	ppm	ASTM D5185m 125	43	---
Sulfur	ppm	ASTM D5185m 22500	27063	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	43	---
Sodium	ppm	ASTM D5185m	10	---
Potassium	ppm	ASTM D5185m >20	4	---


VISUAL

method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	---
Debris	scalar	*Visual NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	---
Emulsified Water	scalar	*Visual >.2	NEG	---
Free Water	scalar	*Visual	NEG	---


FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	94.5	---




OIL ANALYSIS REPORT

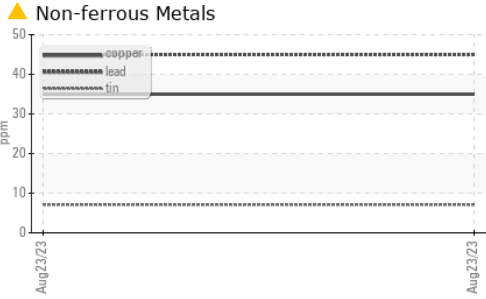

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

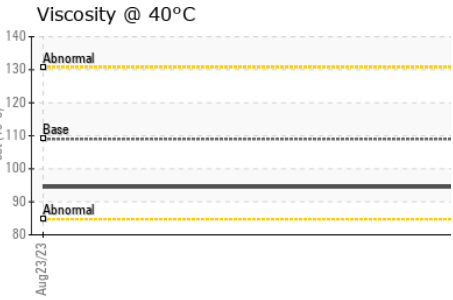

GRAPHS

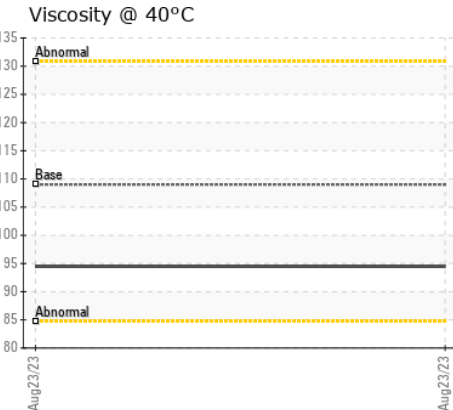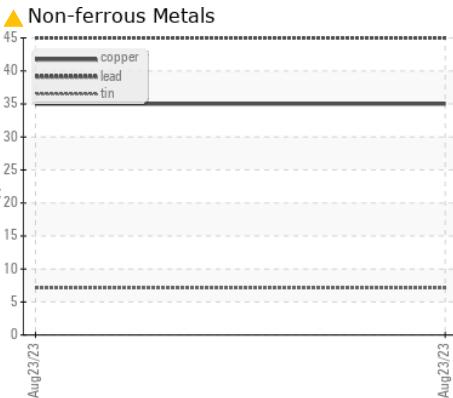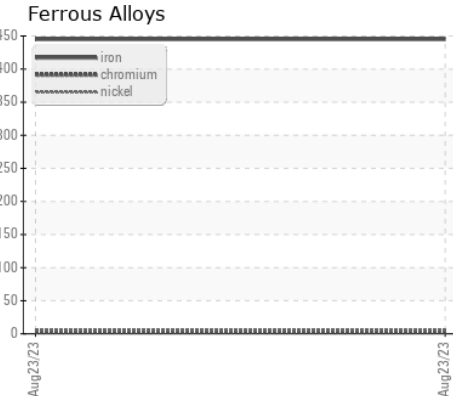

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104883 **Received** : 30 Aug 2023
Lab Number : 05939386 **Diagnosed** : 01 Sep 2023
Unique Number : 10629998 **Diagnostician** : Sean Felton
Test Package : FLEET

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)