


## **PROBLEM SUMMARY**

## FLEET/DILLON Machine Id 2126964 (S/N 4v4nc9eh6nn603212)

Component **2 Differential** Fluid

GEAR OIL SAE 75W90 (--- GAL)

## COMPONENT CONDITION SUMMARY

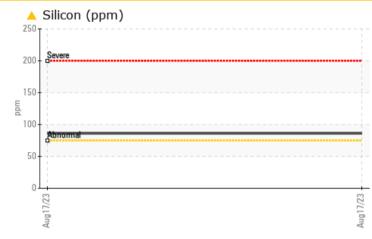

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Silicon	ppm	ASTM D5185m	>75	<u> </u>						


Customer Id: PERDILSC Sample No.: PCA0104848 Lab Number: 05939388 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Sean Felton +1 919-379-4092 sfelton@wearcheckusa.com

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

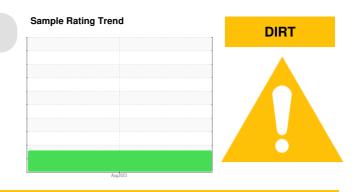

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

#### Area **FLEET/DILLON** Machine Id **2126964 (S/N 4v4nc9eh6nn603212)** Component

2 Differential

GEAR OIL SAE 75W90 (--- GAL)

## DIAGNOSIS

### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

#### **Fluid Condition**

The condition of the oil is acceptable for the time in service.

				Aug2023		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104848		
Sample Date		Client Info		17 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	240		
Chromium	ppm	ASTM D5185m	>10	4		
Nickel	ppm	ASTM D5185m	>10	3		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	4		
Lead	ppm	ASTM D5185m	>25	10		
-	ppm	ASTM D5185m	>100	45		
	ppm	ASTM D5185m	>10	4		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	78		
	ppm	ASTM D5185m	200	4		
	ppm	ASTM D5185m	12	0		
-	ppm	ASTM D5185m		13		
	ppm	ASTM D5185m	12	1		
	ppm	ASTM D5185m	150	23		
	ppm	ASTM D5185m	1650	1100		
	ppm	ASTM D5185m	125	20		
	ppm	ASTM D5185m	22500	30933		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	▲ 86		
	ppm	ASTM D5185m		6		
	ppm	ASTM D5185m	>20	4		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
•	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
	scalar	*Visual	NORML	NORML		
	scalar	*Visual	NORML	NORML		
	scalar	*Visual	>.2	NEG		
	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	94.9		
35:38) Rev: 1					Submitted By:	KEVIN HOOKS


Report Id: PERDILSC [WUSCAR] 05939388 (Generated: 09/01/2023 20:35:38) Rev: 1

Submitted By: KEVIN HOOKS

DIRT



# **OIL ANALYSIS REPORT**

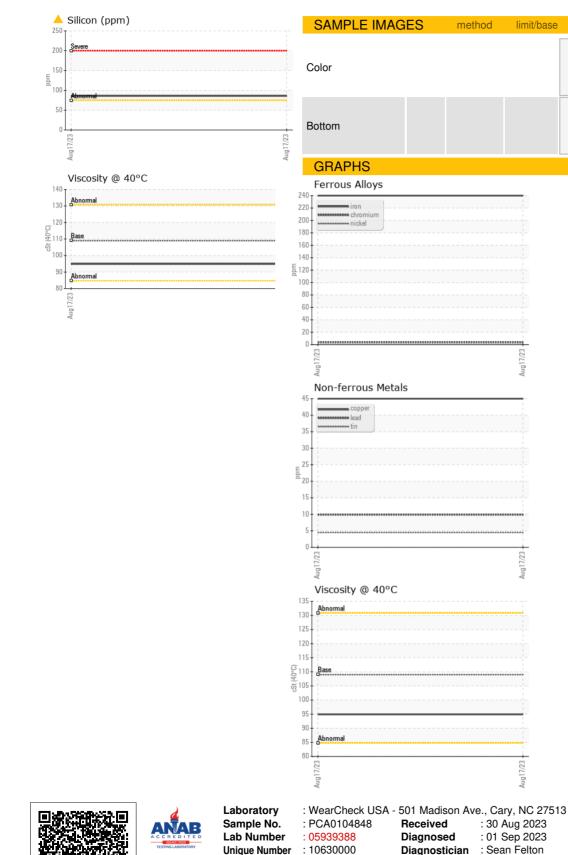

 501 Madison Ave., Cary, NC 27513
 PERDUE FARMS - DILLON

 Received
 : 30 Aug 2023
 2047 HWY 9 WEST

 Diagnosed
 : 01 Sep 2023
 DILLON, SC

 Diagnostician
 : Sean Felton
 US 29536

 vice at 1-800-237-1369.
 kevin.hooks@perdue.com

 17025 scope of accreditation.
 T: (843)841-8069

 the simple acceptance decision rule (JCGM 106:2012)
 F: (843)841-8070

history1

no image

no image

current

no image

no image

history2

no image

no image

Certificate L2367 Test Package : FLEET To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)