

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id 812090

Component Transmission (Auto)

PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0091389	GFL0088750	GFL0086093
Sample Date		Client Info		28 Aug 2023	16 Aug 2023	12 Jul 2023
Machine Age	hrs	Client Info		2477	2394	2203
Oil Age	hrs	Client Info		83	2394	2203
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	48	57	52
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	24	27	25
Lead	ppm	ASTM D5185m	>50	4	6	4
Copper	ppm	ASTM D5185m	>225	13	18	17
Tin	ppm	ASTM D5185m	>10	4	5	3
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		66	65	41
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		<1	1	1
Manganese	ppm	ASTM D5185m		1	1	2
Magnesium	ppm	ASTM D5185m		2	2	1
Calcium	ppm	ASTM D5185m		107	108	114
Phosphorus	ppm	ASTM D5185m		214	206	221
Zinc	ppm	ASTM D5185m		0	7	0
Sulfur	ppm	ASTM D5185m		1682	1345	1620
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5	6	5
Sodium	ppm	ASTM D5185m		5	0	5
Potassium	ppm	ASTM D5185m	>20	4	4	3
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34	29.9	29.5	29.7
1:02:44) Rev: 1				S	Submitted By: JC	OSHUA TINKER


Report Id: GFL010 [WUSCAR] 05939401 (Generated: 09/01/2023 21:02:44) Rev: 1



OIL ANALYSIS REPORT

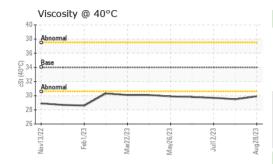

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image
GRAPHS Ferrous Alloys					
50 nickel 40 35 30					
25 20 15					

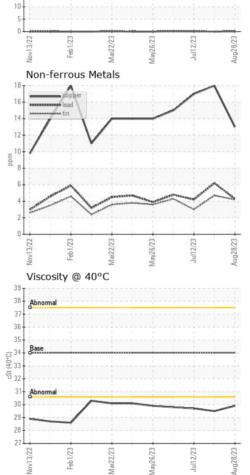



GFL Environmental - 010 - Stockbridge 1280 Rum Creek Parkway Stockbridge, GA US 30281 Contact: JOSHUA TINKER joshuatinker@gflenv.com T: 106:2012) F:

 Certificate 12367
 Test Package
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: GFL0091389

: 05939401

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Diagnosed

: 30 Aug 2023

: 01 Sep 2023

Diagnostician : Sean Felton

Laboratory

Sample No.

Lab Number

Unique Number : 10630013

Page 2 of 2