


PROBLEM SUMMARY

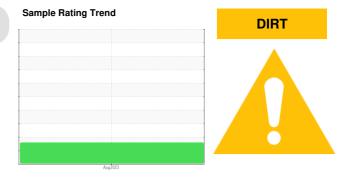


VOLVO VNR64T640 26633

Main Transmission (Auto)

NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

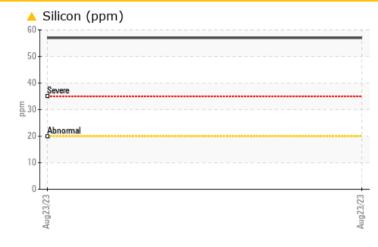

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status			ABNORMAL							
Silicon	ppm	ASTM D5185m	>20	🔺 57						

Customer Id: PERDILSC Sample No.: PCA0104887 Lab Number: 05939411 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



VOLVO VNR64T640 26633 Component

Main Transmission (Auto) Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal.


Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104887		
Sample Date		Client Info		23 Aug 2023		
	mls	Client Info		731428		
U U	mls	Client Info		731428		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
		ASTM D5185m	>160	122		
- 1	ppm ppm	ASTM D5185m	>5	2		
		ASTM D5185m	>5	2 <1		
1	ppm	ASTM D5185m	>0	<1		
	ppm	ASTM D5185m	>5	< 1 0		
	ppm	ASTM D5185m	>50	7		
	ppm					
	ppm	ASTM D5185m ASTM D5185m	>50	<1 54		
	ppm	ASTM D5185m ASTM D5185m	>225 >10			
	ppm		>10	<1		
	ppm	ASTM D5185m ASTM D5185m		0		
	ppm			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		18		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		2		
Manganese	ppm	ASTM D5185m		57		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		718		
Phosphorus	ppm	ASTM D5185m		685		
Zinc	ppm	ASTM D5185m		11		
Sulfur	ppm	ASTM D5185m		6329		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6 57		
Sodium	ppm	ASTM D5185m		5		
Potassium	ppm	ASTM D5185m	>20	6		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt s	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water s	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history1	history2
	cSt	ASTM D445		51.0		
0:34:09) Rev: 1				0.10	Submitted Bv:	KEVIN HOOKS
,						



OIL ANALYSIS REPORT

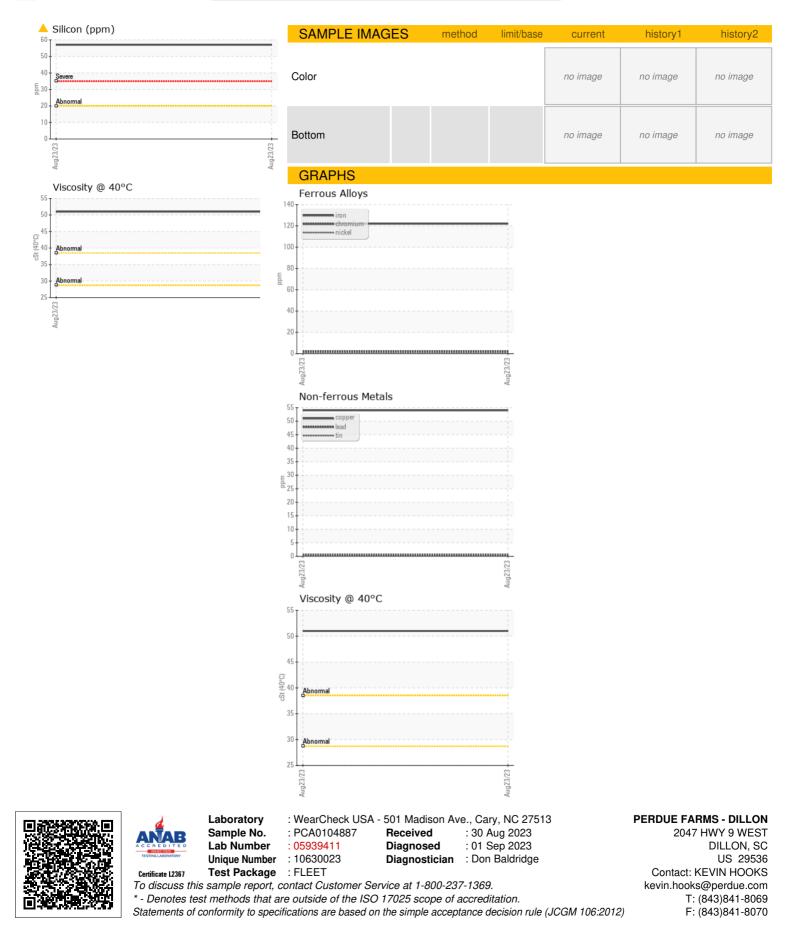

Submitted By: KEVIN HOOKS

Page 4 of 4