




# OIL ANALYSIS REPORT

Sample Rating Trend

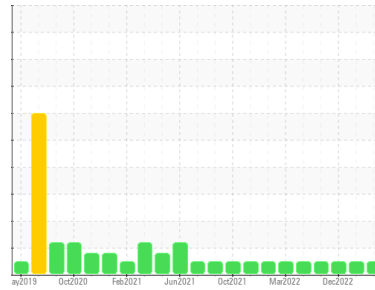

**NORMAL**



Machine Id  
**10997**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (9 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0071613</b>	GFL0071583	GFL0061671
Sample Date	Client Info	<b>30 Aug 2023</b>	12 Apr 2023	29 Dec 2022
Machine Age	hrs	<b>19680</b>	19680	19680
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>12</b>	47	25
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	2	1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >15	<b>3</b>	3	5
Lead	ppm ASTM D5185m >25	<b>&lt;1</b>	2	0
Copper	ppm ASTM D5185m >100	<b>&lt;1</b>	3	1
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>4</b>	5	8
Barium	ppm ASTM D5185m 10	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 100	<b>58</b>	64	62
Manganese	ppm ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 450	<b>857</b>	833	678
Calcium	ppm ASTM D5185m 3000	<b>1044</b>	1133	1501
Phosphorus	ppm ASTM D5185m 1150	<b>983</b>	1014	1087
Zinc	ppm ASTM D5185m 1350	<b>1149</b>	1227	1216
Sulfur	ppm ASTM D5185m 4250	<b>2858</b>	2687	3610

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	17	9
Sodium	ppm ASTM D5185m >216	<b>4</b>	10	6
Potassium	ppm ASTM D5185m >20	<b>2</b>	8	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.5</b>	1.7	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>7.3</b>	13.6	10.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.1</b>	26.9	22.8

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.7</b>	24.6	19.4
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>8.8</b>	6.4	8.9







# OIL ANALYSIS REPORT

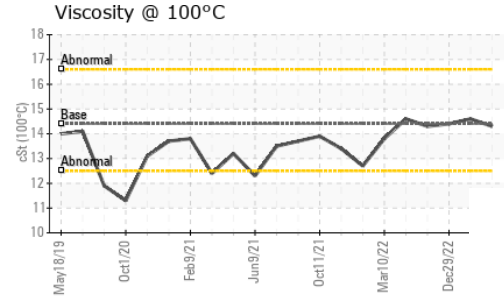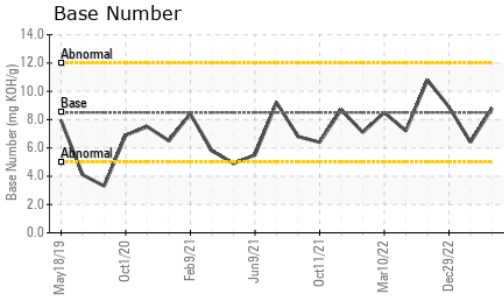

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	14.6	14.4

## GRAPHS

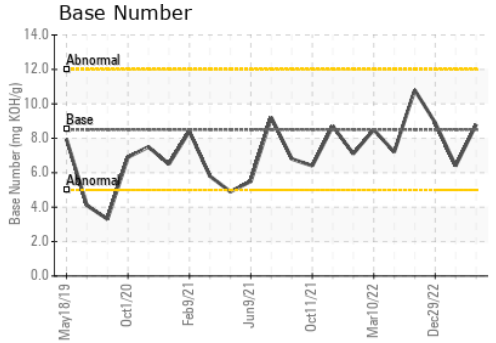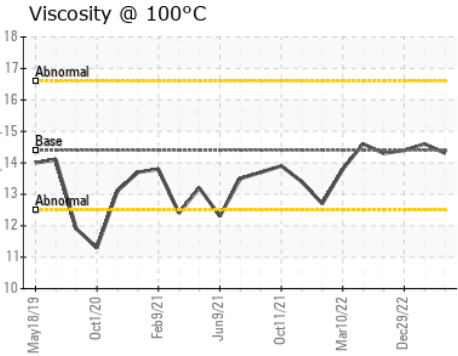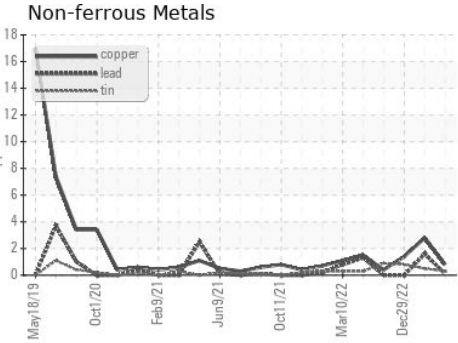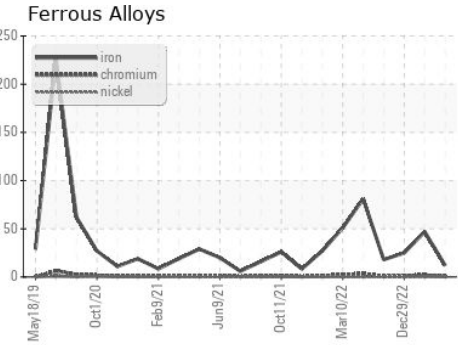

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0071613 **Received** : 31 Aug 2023  
**Lab Number** : **05939479** **Diagnosed** : 01 Sep 2023  
**Unique Number** : 10630091 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)