


Area
Plymouth & Brockton
Machine Id
11398

Component
Diesel Engine
Fluid

PETRO CANADA DURON SHP 15W40 (39 QTS)

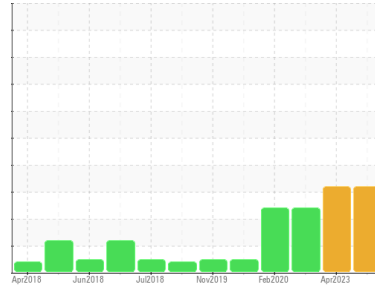

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Light concentration of carbon/soot present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0090628	PCA0090667	PCA0059410
Sample Date	Client Info	16 Aug 2023	20 Apr 2023	11 Dec 2021
Machine Age	mls	425462	441053	139376
Oil Age	mls	12000	0	0
Oil Changed	Client Info	Not Chngd	N/A	N/A
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >200	60	64	45
Chromium	ppm	ASTM D5185m >10	2	3	3
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >30	5	5	8
Lead	ppm	ASTM D5185m >30	11	7	5
Copper	ppm	ASTM D5185m >30	2	2	4
Tin	ppm	ASTM D5185m >4	2	2	2
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	4	3	11
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	54	53	55
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	874	785	774
Calcium	ppm	ASTM D5185m 1070	1033	1003	1007
Phosphorus	ppm	ASTM D5185m 1150	918	887	873
Zinc	ppm	ASTM D5185m 1270	1136	1077	1049
Sulfur	ppm	ASTM D5185m 2060	3456	2830	2441

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	5	5	6
Sodium	ppm	ASTM D5185m	4	13	5
Potassium	ppm	ASTM D5185m >20	1	4	0
Fuel	%	ASTM D3524 >3.0	9.9	8.5	8.9

INFRA-RED


method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	4.1	3.9	1.6
Nitration	Abs/cm	*ASTM D7624 >20	13.0	13.3	10.5
Sulfation	Abs.1mm	*ASTM D7415 >30	26.8	26.6	22.7

FLUID DEGRADATION


method	limit/base	current	history1	history2	
Oxidation	Abs.1mm	*ASTM D7414 >25	15.7	16.5	18.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	5.88	8.86	7.08

OIL ANALYSIS REPORT


Fuel Dilution

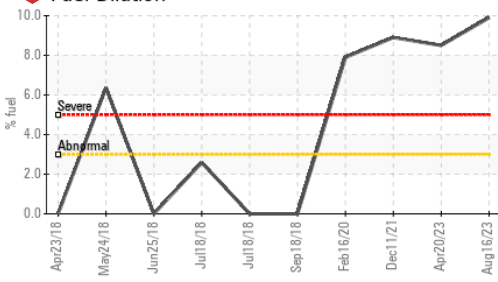


Soot %

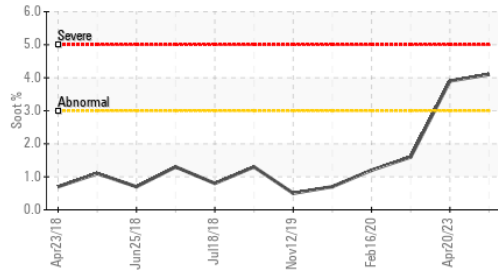

Soot %

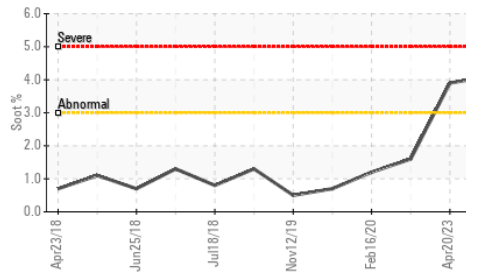

Base Number

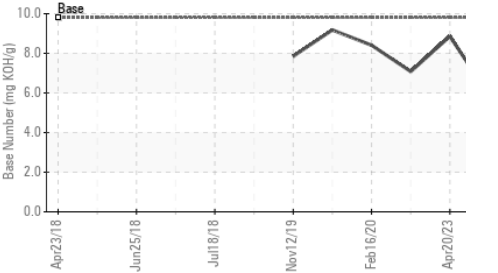

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.8	▲ 11.5

GRAPHS


Iron (ppm)

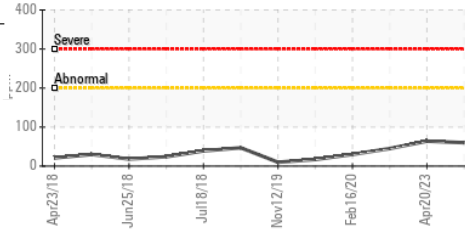


Aluminum (ppm)

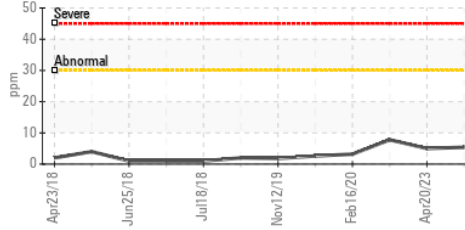


Copper (ppm)

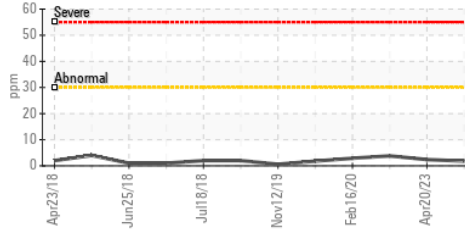


Viscosity @ 100°C

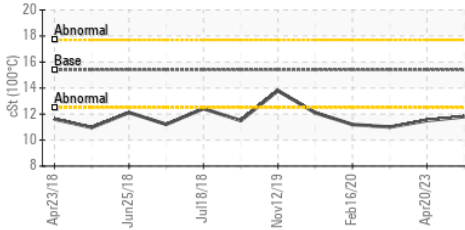


Lead (ppm)

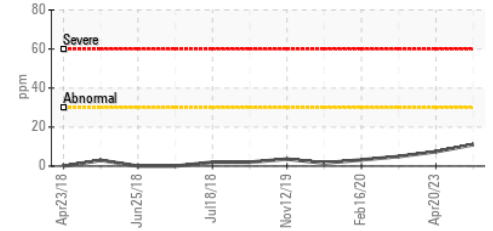


Chromium (ppm)

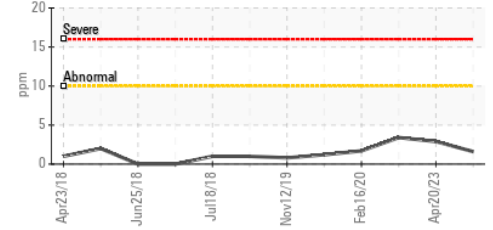

Silicon (ppm)

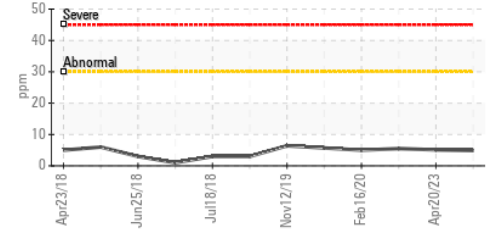

Base Number

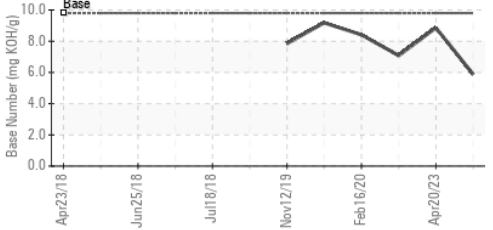

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0090628 **Received** : 31 Aug 2023
Lab Number : 05939837 **Diagnosed** : 01 Sep 2023
Unique Number : 10630449 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PLYMOUTH & BROCKTON
 8 INDUSTRIAL PARK RD
 PLYMOUTH, MA
 US 02360

Contact: Donald Pelquin
 Dpelquin@P-B.com
 T: (508)732-6039
 F: (508)732-6091