




# OIL ANALYSIS REPORT

Sample Rating Trend

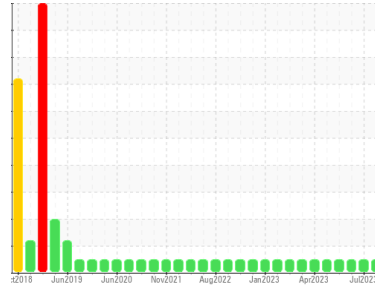

**NORMAL**



Machine Id

**2729**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0088414</b>	GFL0088371	GFL0088384
Sample Date	Client Info		<b>29 Aug 2023</b>	11 Jul 2023	30 Jun 2023
Machine Age	mls	Client Info	<b>296967</b>	290052	288286
Oil Age	mls	Client Info	<b>274902</b>	274902	274902
Oil Changed	Client Info		<b>Changed</b>	N/A	Filtered
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>11</b>	10	17
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	3	1
Lead	ppm	ASTM D5185m >150	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >90	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	2	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	58	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>945</b>	1002	1005
Calcium	ppm	ASTM D5185m 1070	<b>1059</b>	1112	1145
Phosphorus	ppm	ASTM D5185m 1150	<b>1022</b>	1078	1043
Zinc	ppm	ASTM D5185m 1270	<b>1245</b>	1349	1321
Sulfur	ppm	ASTM D5185m 2060	<b>3627</b>	3913	3652

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>9</b>	4	4
Sodium	ppm	ASTM D5185m	<b>4</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>5</b>	5	9

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.2</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.2</b>	7.2	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.3</b>	19.6	20.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	15.4	16.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.3</b>	8.8	8.3







# OIL ANALYSIS REPORT

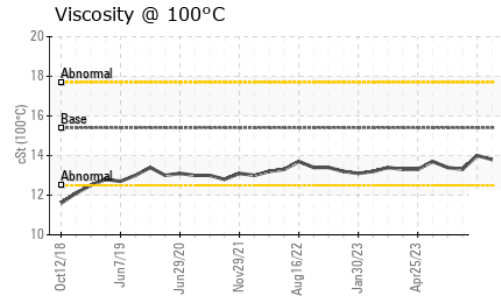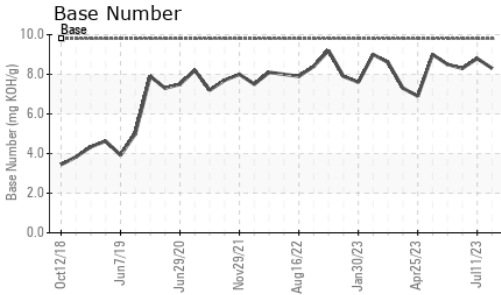

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.0	13.3

## GRAPHS

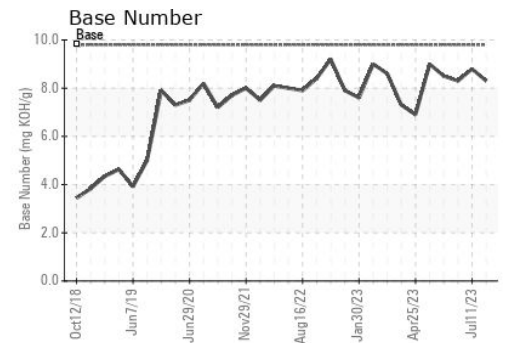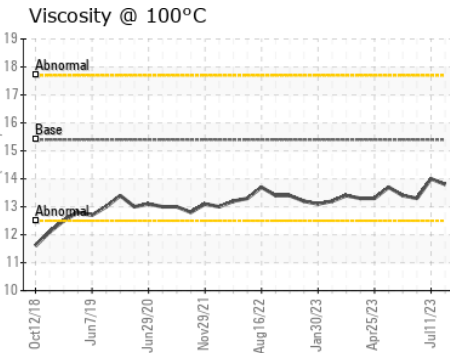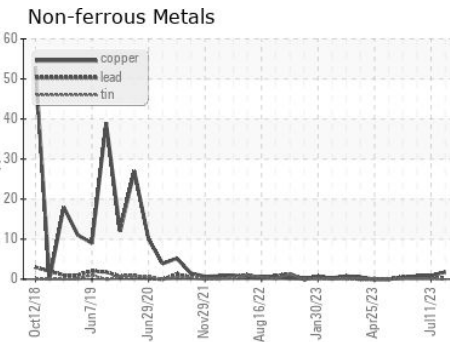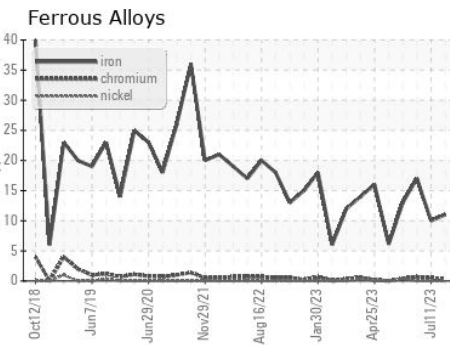

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088414 **Received** : 31 Aug 2023  
**Lab Number** : **05940107** **Diagnosed** : 01 Sep 2023  
**Unique Number** : 10630719 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)