


Sample Rating Trend





#### Machine Id **426143** Component **1 Differential** Fluid

NOT GIVEN (--- GAL)

# COMPONENT CONDITION SUMMARY



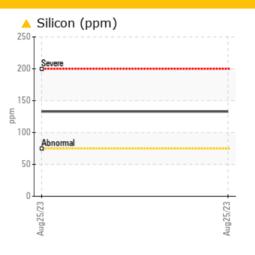

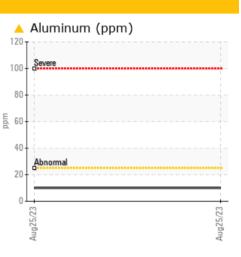

DIRT

# RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: 1st Axle / Pusher )

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL			
Iron	ppm	ASTM D5185m	>500	<u> </u>			
Aluminum	ppm	ASTM D5185m	>25	<b>_</b> 10			
Silicon	ppm	ASTM D5185m	>75	<b>A</b> 133			

Customer Id: GFL983 Sample No.: GFL0089467 Lab Number: 05940410 Test Package: FLEET



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Check Dirt Access			?	We advise that you check all areas where dirt can enter the system.	

# HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**



#### Machine Id 426143 Component **1 Differential** Fluid NOT GIVEN (--- GAL)

### DIAGNOSIS

#### A Recommendation

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: 1st Axle / Pusher )

## A Wear

Gear wear is indicated.

### Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFOR		method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0089467		
Sample Date		Client Info		25 Aug 2023		
Machine Age	mls	Client Info		445086		
Oil Age	mls	Client Info		445086		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>A</b> 875		
Chromium	ppm	ASTM D5185m	>10	6		
Nickel	ppm	ASTM D5185m	>10	19		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<u> </u>		
Lead	ppm	ASTM D5185m	>25	6		
Copper	ppm	ASTM D5185m	>100	64		
Tin	ppm	ASTM D5185m	>10	4		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		160		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		1		
Manganese	ppm	ASTM D5185m		12		
Magnesium	ppm	ASTM D5185m		4		
Calcium	ppm	ASTM D5185m		444		
Phosphorus	ppm	ASTM D5185m		1254		
Zinc	ppm	ASTM D5185m		208		
Sulfur	ppm	ASTM D5185m		22827		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>1</b> 33		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm	ASTM D5185m	>20	10		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		83.6		
	ισι	A0 I WI D440		03.0		

Report Id: GFL983 [WUSCAR] 05940410 (Generated: 09/05/2023 16:56:00) Rev: 1

Submitted By: TECHNICIAN ACCOUNT



# **OIL ANALYSIS REPORT**

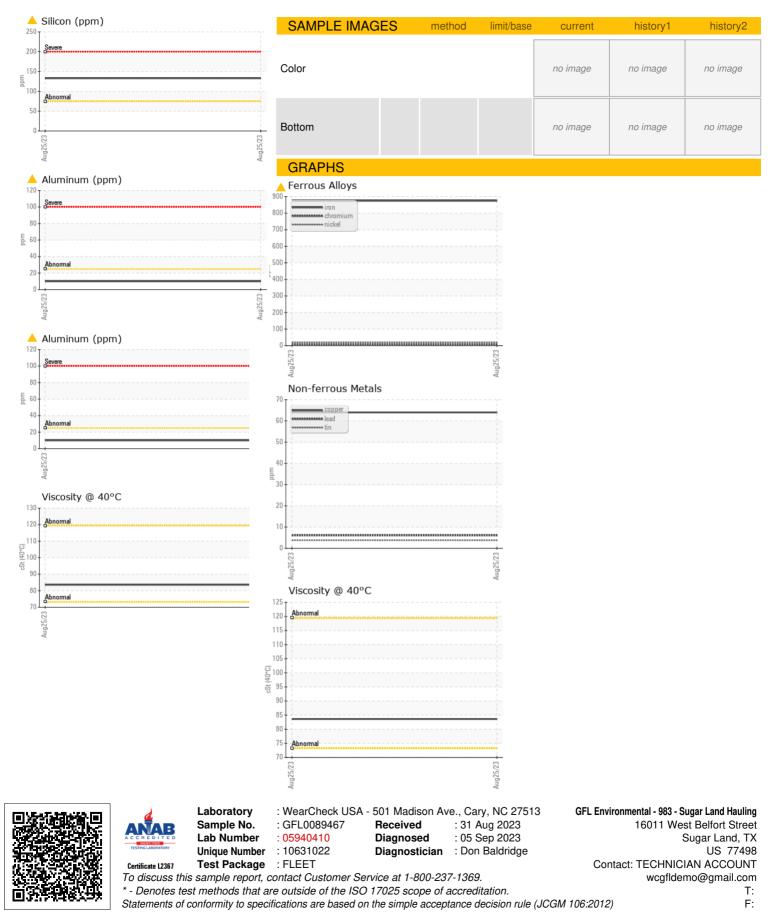

Submitted By: TECHNICIAN ACCOUNT