

OIL ANALYSIS REPORT

Sample Rating Trend



427191 - SW4738 Component

Transmission (Auto) Fluid DEXRON III (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.


SAMPLE INFORI	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		GFL0089461	GFL0065826		
Sample Date		Client Info		26 Aug 2023	31 Jan 2023		
Machine Age	mls	Client Info		340693	330902		
Oil Age	mls	Client Info		340693	0		
Oil Changed		Client Info		Changed	N/A		
Sample Status				NORMAL	NORMAL		
WEAR METAL	S	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>160	16	115		
Chromium	ppm	ASTM D5185m	>5	0	<1		
Nickel	ppm	ASTM D5185m	>5	<1	0		
Titanium	ppm	ASTM D5185m		0	0		
Silver	ppm	ASTM D5185m	>5	0	0		
Aluminum	ppm	ASTM D5185m	>50	2	11		
Lead	ppm	ASTM D5185m	>50	4	11		
Copper	ppm	ASTM D5185m	>225	114	82		
Tin	ppm	ASTM D5185m	>10	<1	2		
Vanadium	ppm	ASTM D5185m		0	0		
Cadmium	ppm	ASTM D5185m		0	0		
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		120	61		
Barium	ppm	ASTM D5185m		0	0		
Molybdenum	ppm	ASTM D5185m		<1	<1		
Manganese	ppm	ASTM D5185m		<1	1		
Magnesium	ppm	ASTM D5185m		0	3		
Calcium	ppm	ASTM D5185m		409	119		
Phosphorus	ppm	ASTM D5185m		452	221		
Zinc	ppm	ASTM D5185m		34	59		
Sulfur	ppm	ASTM D5185m		1650	1198		
CONTAMINAN	TS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	4	9		
Sodium	ppm	ASTM D5185m		2	3		
Potassium	ppm	ASTM D5185m	>20	<1	1		
VISUAL		method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG		
Free Water	scalar	*Visual		NEG	NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	35.0	29.1	27.7		
3:56:12) Rev: 1			Submitted By: TECHNICIAN ACCOUNT				

Report Id: GFL983 [WUSCAR] 05940421 (Generated: 09/05/2023 13:56:12) Rev: 1

Page 1 of 2



OIL ANALYSIS REPORT

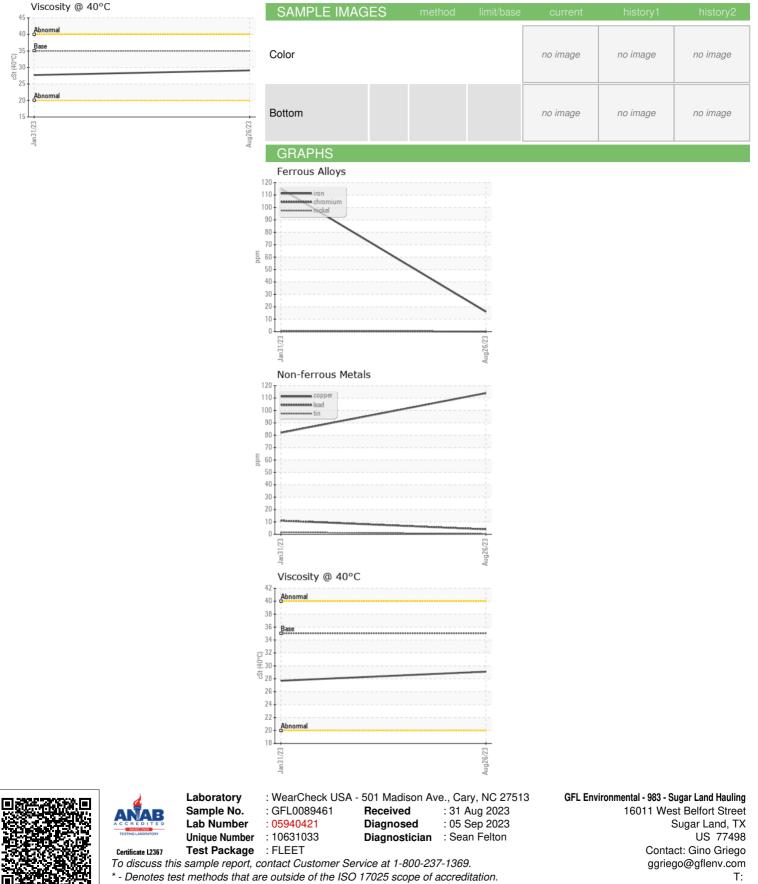

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TECHNICIAN ACCOUNT

F: