


PROBLEM SUMMARY



Machine Id
30057
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)



Sample Rating Trend

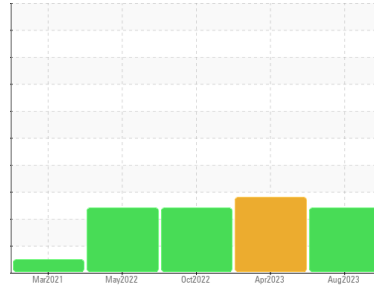

FUEL



COMPONENT CONDITION SUMMARY

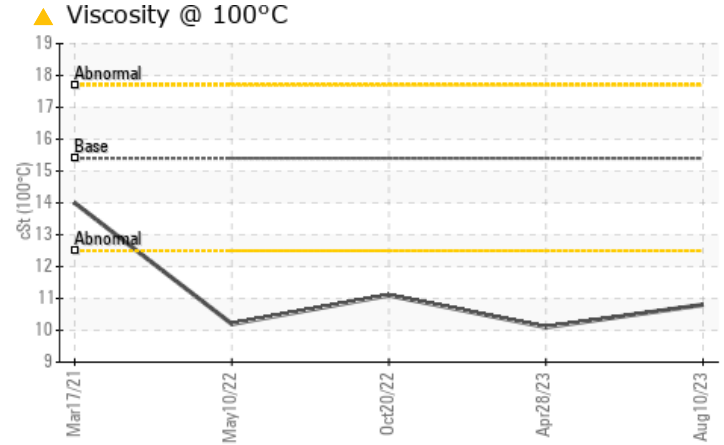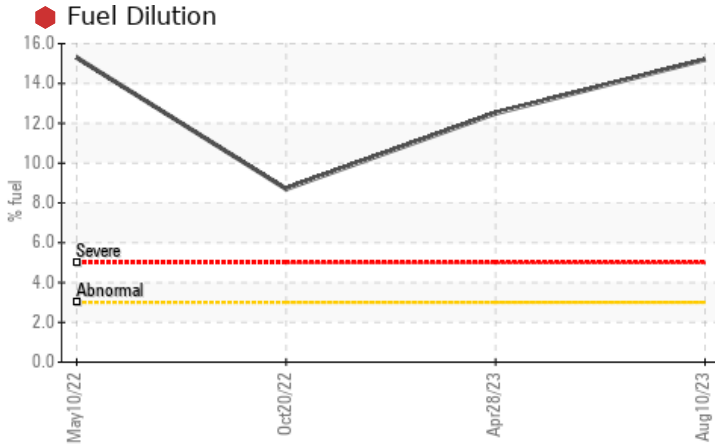

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Fuel	%	ASTM D3524	>3.0	15.2	12.5	8.7
Visc @ 100°C	cSt	ASTM D445	15.4	10.8	10.1	11.1

Customer Id: ORIBET
Sample No.: PCA0102974
Lab Number: 05941720
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

28 Apr 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



20 Oct 2022 Diag: Jonathan Hester

FUEL



We advise that you check the fuel injection system. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



10 May 2022 Diag: Jonathan Hester

FUEL




We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



OIL ANALYSIS REPORT

Sample Rating Trend

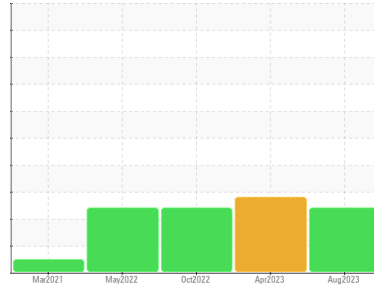

FUEL



Machine Id
30057
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0102974	PCA0095309	LW0005769
Sample Date	Client Info	10 Aug 2023	28 Apr 2023	20 Oct 2022
Machine Age	hrs	34150	33777	33476
Oil Age	hrs	373	301	804
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	20	35	16
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >5	<1	0	<1
Titanium	ppm ASTM D5185m >2	<1	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	2	5	1
Lead	ppm ASTM D5185m >40	<1	<1	<1
Copper	ppm ASTM D5185m >330	2	<1	4
Tin	ppm ASTM D5185m >15	0	0	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	<1	2
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	57	53	54
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	874	868	861
Calcium	ppm ASTM D5185m 1070	981	960	1021
Phosphorus	ppm ASTM D5185m 1150	900	891	958
Zinc	ppm ASTM D5185m 1270	1072	1111	1159
Sulfur	ppm ASTM D5185m 2060	3134	2849	3350

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	7	5	6
Sodium	ppm ASTM D5185m	6	9	3
Potassium	ppm ASTM D5185m >20	0	1	1
Fuel	% ASTM D3524 >3.0	15.2	12.5	8.7




INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.7	1.2	0.9
Nitration	Abs/cm *ASTM D7624 >20	7.0	8.8	7.8
Sulfation	Abs/.1mm *ASTM D7415 >30	18.0	19.7	20.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.9	14.4	14.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.7	6.9	9.1





OIL ANALYSIS REPORT

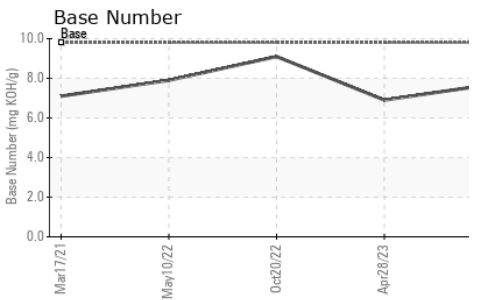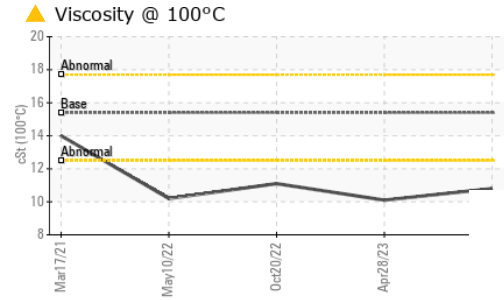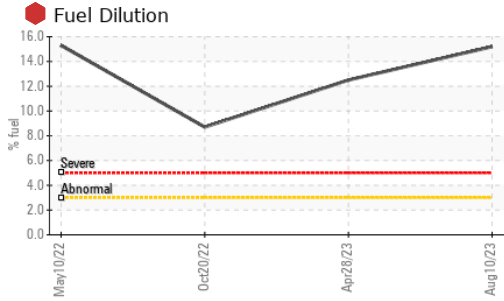

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	● 10.1

GRAPHS

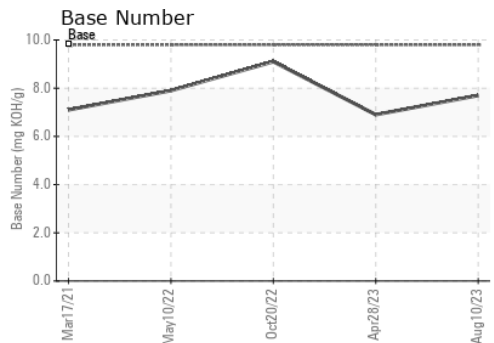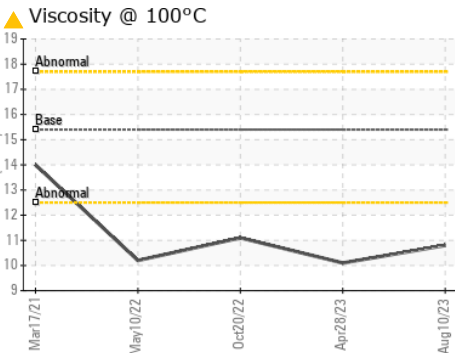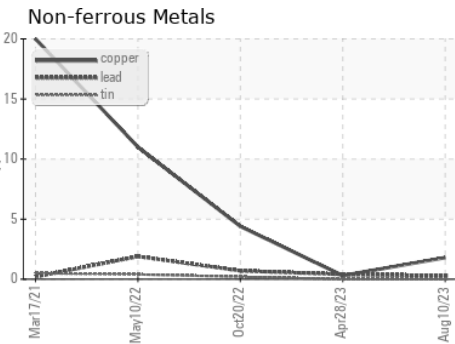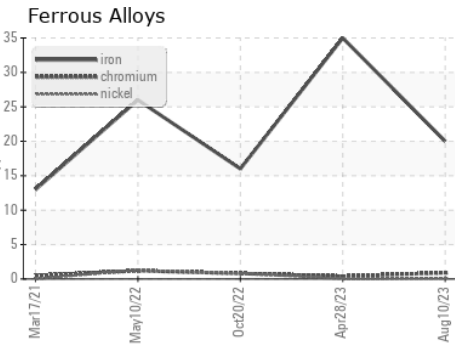

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0102974 **Received** : 05 Sep 2023
Lab Number : 05941720 **Diagnosed** : 06 Sep 2023
Unique Number : 10632332 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

LRS - BETHEL HEIGHTS (NWA AR)
 848 HWY 264 E
 BETHEL HEIGHTS, AR
 US 72764
 Contact: ROBERT HEATH
 rheath@lrsrecycles.com
 T: (479)305-8958
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)