


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

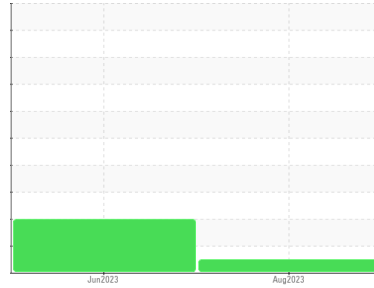

Machine Id  
**BTR1**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0102954</b>	PCA0098099	---
Sample Date	Client Info		<b>10 Aug 2023</b>	22 Jun 2023	---
Machine Age	hrs	Client Info	<b>4530</b>	4151	---
Oil Age	hrs	Client Info	<b>379</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>3</b>	100	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	---
Nickel	ppm	ASTM D5185m >5	<b>2</b>	▲ 14	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	5	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	28	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	14	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	114	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m 1010	<b>1065</b>	598	---
Calcium	ppm	ASTM D5185m 1070	<b>1179</b>	1329	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1125</b>	799	---
Zinc	ppm	ASTM D5185m 1270	<b>1329</b>	1033	---
Sulfur	ppm	ASTM D5185m 2060	<b>3990</b>	2573	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	12	---
Sodium	ppm	ASTM D5185m	<b>6</b>	8	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	11	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	1.6	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	16.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.5</b>	31.9	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.3</b>	36.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	▲ 2.3	---





# OIL ANALYSIS REPORT

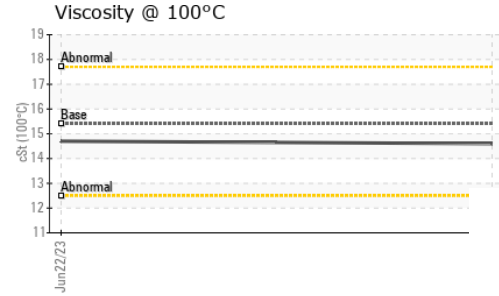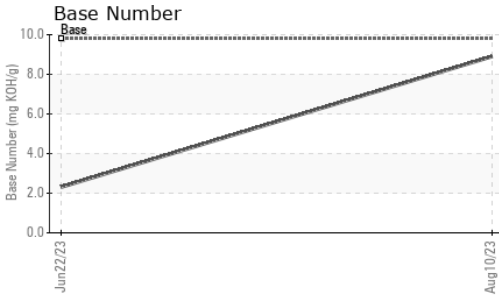

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	14.7

## GRAPHS

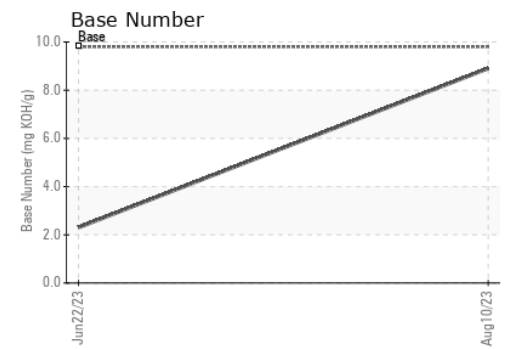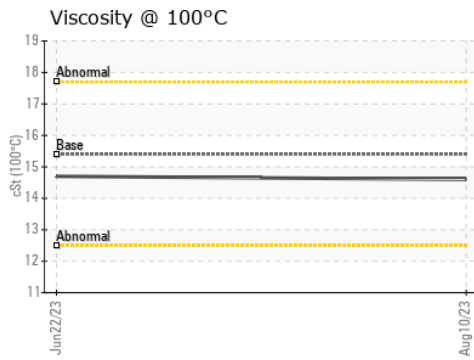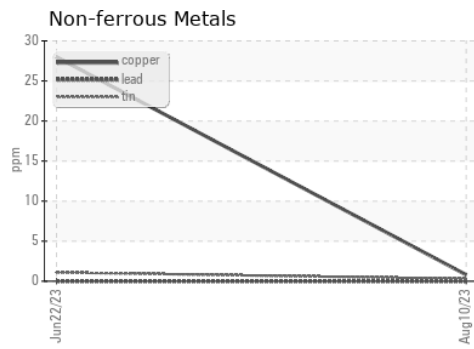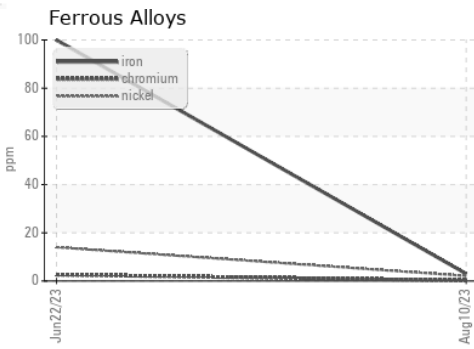

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102954     **Received** : 05 Sep 2023  
**Lab Number** : **05941722**     **Diagnosed** : 05 Sep 2023  
**Unique Number** : 10632334     **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**LRS - BETHEL HEIGHTS (NWA AR)**  
 848 HWY 264 E  
 BETHEL HEIGHTS, AR  
 US 72764  
 Contact: JAMIE HAYWORTH  
 jhayworth@lrsrecycles.com  
 T: (479)878-1384  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)