

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id 710034 Component

Fluid

Diesel Engine

PETRO CANADA DURON SHP 15W40 (--- LTR)

Description and a state of the second
Recommendation
neoonnenaation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0089493	GFL0071449	
Sample Date		Client Info		14 Aug 2023	24 Feb 2023	
Machine Age	hrs	Client Info		5314	4280	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Glycol		WC Method		NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	19	14	
Chromium	ppm	ASTM D5185m	>5	1	<1	
Nickel	ppm	ASTM D5185m	>2	<1	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>30	2	2	
Lead	ppm	ASTM D5185m	>30	_ <1	0	
Copper	ppm	ASTM D5185m	>150	3	2	
Tin	ppm	ASTM D5185m	>5	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base		historv1	historv2
ADDITIVES Boron	maa	method ASTM D5185m	limit/base	current 0	history1 <1	history2
Boron	ppm mag	ASTM D5185m	0	0	history1 <1 0	
Boron Barium	ppm	ASTM D5185m ASTM D5185m		0 0	<1 0	
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	0 0 63	<1 0 56	
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	0 0 63 <1	<1 0 56 <1	
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	0 0 63 <1 1019	<1 0 56 <1 874	
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	0 0 63 <1	<1 0 56 <1	
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	0 0 63 <1 1019 1149	<1 0 56 <1 874 1031 956	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	0 0 63 <1 1019 1149 1066	<1 0 56 <1 874 1031	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	0 0 63 <1 1019 1149 1066 1316	<1 0 56 <1 874 1031 956 1147	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	0 0 63 <1 1019 1149 1066 1316 3614	<1 0 56 <1 874 1031 956 1147 2711 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	0 0 60 1010 1070 1150 1270 2060	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6	<1 0 56 <1 874 1031 956 1147 2711 history1 3	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	0 0 63 <1 1019 1149 1066 1316 3614 current	<1 0 56 <1 874 1031 956 1147 2711 history1	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	0 0 60 1010 1070 1150 1270 2060 kimit/base >20	0 0 63 <1 1019 1149 1066 1316 3614 current 6 7	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 3	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >20	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6 7 1	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 2 2 history1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >20 limit/base >20	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6 7 1 <i>current</i> 0.4	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 2 history1 0.4	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 <i>limit/base</i> >20 <i>limit/base</i> >3 >20	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6 7 1 <i>current</i> 0.4 9.6	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 3 2 history1 0.4 9.1	 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 imit/base >20 imit/base >3 >20 >30	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6 7 1 <i>current</i> 0.4 9.6 19.0	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 2 2 history1 0.4 9.1 18.8	 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624	0 0 0 1010 1070 1150 1270 2060 2060 2060 200 200 200 200 200 200	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6 7 1 <i>current</i> 0.4 9.6 19.0 <i>current</i>	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 3 2 history1 0.4 9.1 18.8 history1	 history2 history2 history2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415	0 0 0 1010 1070 1150 1270 2060 imit/base >20 imit/base >3 >20 >30	0 0 63 <1 1019 1149 1066 1316 3614 <i>current</i> 6 7 1 <i>current</i> 0.4 9.6 19.0	<1 0 56 <1 874 1031 956 1147 2711 history1 3 3 2 2 history1 0.4 9.1 18.8	 history2 history2 history2




OIL ANALYSIS REPORT

VISUAL





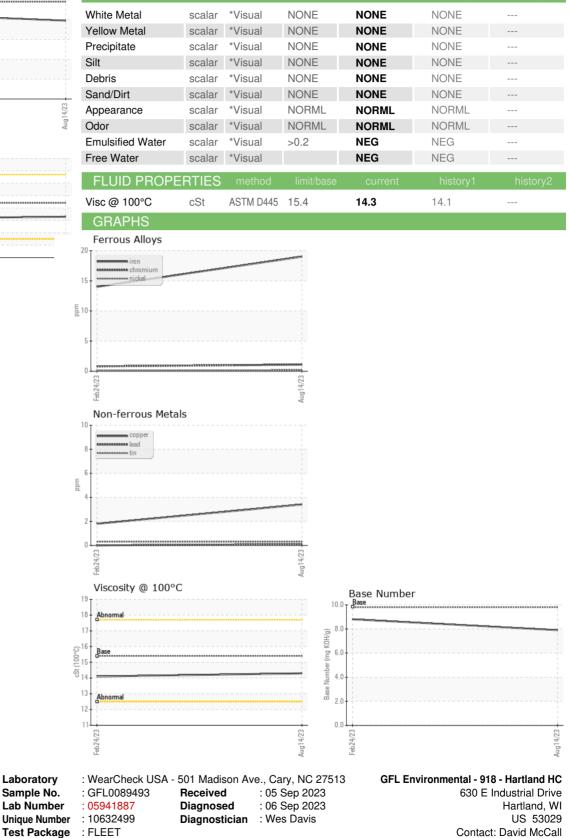

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

回話

Contact/Location: David McCall - GFL918

F:

david.mccall@gflenv.com

T: (262)369-3069