




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

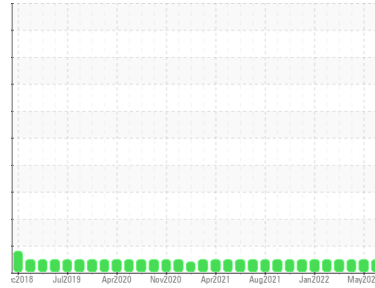

Machine Id  
**10898C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0050901</b>	GFL0084248	GFL0043273
Sample Date	Client Info		<b>01 Sep 2023</b>	19 May 2023	15 Mar 2022
Machine Age	hrs	Client Info	<b>12952</b>	12197	330609
Oil Age	hrs	Client Info	<b>12952</b>	12197	299
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>19</b>	10	8
Chromium	ppm	ASTM D5185m >4	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>5</b>	<1	1
Lead	ppm	ASTM D5185m >30	<b>2</b>	<1	1
Copper	ppm	ASTM D5185m >35	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >4	<b>2</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>11</b>	10	21
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>73</b>	57	43
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>796</b>	643	511
Calcium	ppm	ASTM D5185m 1510	<b>1919</b>	1613	1656
Phosphorus	ppm	ASTM D5185m 780	<b>969</b>	742	724
Zinc	ppm	ASTM D5185m 870	<b>1209</b>	1039	865
Sulfur	ppm	ASTM D5185m 2040	<b>3061</b>	2693	1963

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>8</b>	7	4
Sodium	ppm	ASTM D5185m	<b>11</b>	7	5
Potassium	ppm	ASTM D5185m >20	<b>4</b>	5	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.4</b>	10.7	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.2</b>	21.0	20.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.1</b>	17.2	17.5
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>3.9</b>	5.3	7







# OIL ANALYSIS REPORT

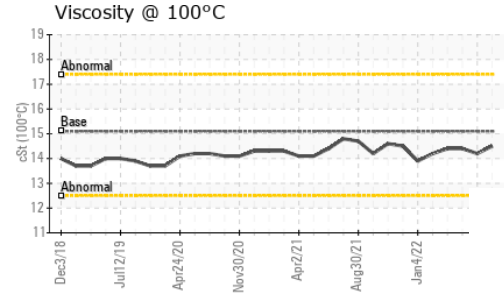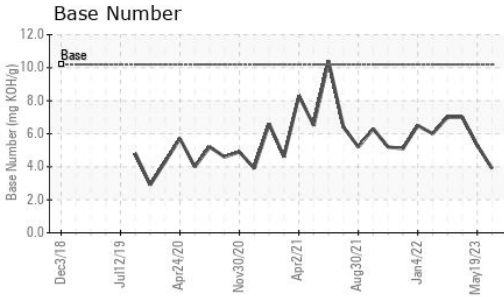

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.5</b>	14.2	14.4

## GRAPHS

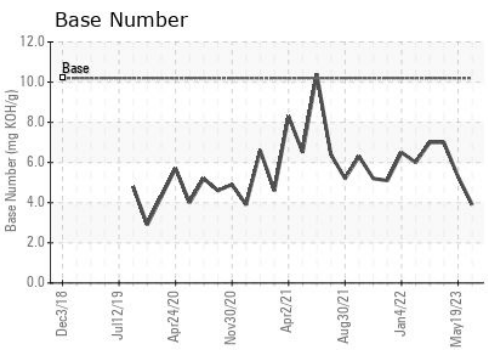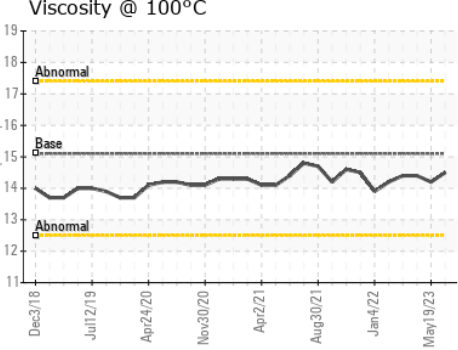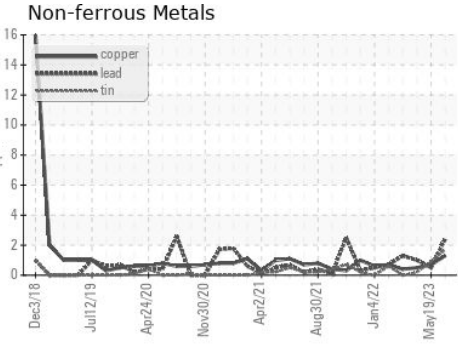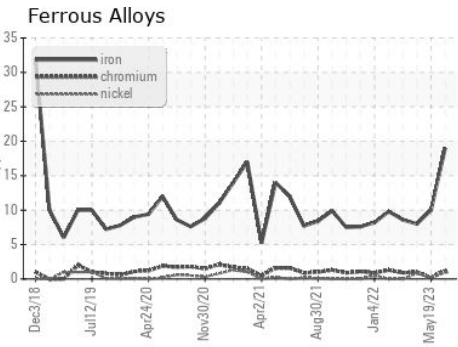

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0050901 **Received** : 05 Sep 2023  
**Lab Number** : **05941972** **Diagnosed** : 06 Sep 2023  
**Unique Number** : 10632584 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 031 - Greenville/Spartanburg**  
 1635 Antioch Church Rd  
 Piedmont, SC  
 US 29673  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)