


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

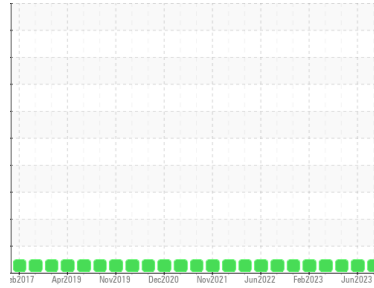

Area
KEMP QUARRIES / PRYOR STONE [66568]
 Machine Id
WP049
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM performed. Engine oil sample taken. Engine oil, and all filters changed.)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0084251 | PCA0086220 | PCA0083981 |
| Sample Date | Client Info | | | 24 Aug 2023 | 30 Jun 2023 | 11 May 2023 |
| Machine Age | hrs | Client Info | | 11908 | 11570 | 11278 |
| Oil Age | hrs | Client Info | | 338 | 292 | 298 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >2.1 | | <1.0 | <1.0 | <1.0 |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >51 | 15 | 7 | 9 |
| Chromium | ppm | ASTM D5185m | >11 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >5 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >31 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >26 | 1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >26 | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >4 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |



| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 0 | 1 | <1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 64 | 59 | 60 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | 1010 | 1025 | 977 | 964 |
| Calcium | ppm | ASTM D5185m | 1070 | 1177 | 1077 | 1131 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1060 | 1052 | 1016 |
| Zinc | ppm | ASTM D5185m | 1270 | 1294 | 1294 | 1250 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3636 | 3758 | 3732 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >22 | 3 | 3 | 3 |
| Sodium | ppm | ASTM D5185m | >31 | 2 | <1 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.8 | 0.5 | 0.7 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.3 | 6.1 | 6.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.0 | 18.0 | 19.2 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 13.7 | 13.3 | 14.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.0 | 8.9 | 9.2 |









OIL ANALYSIS REPORT

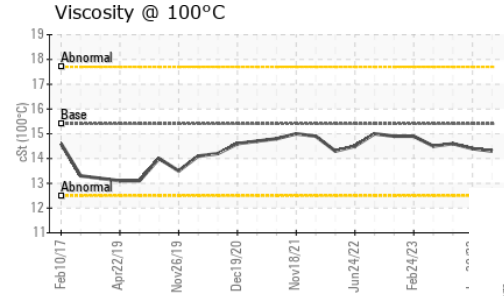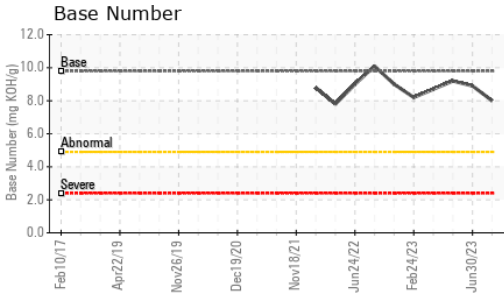

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 14.3 | 14.4 | 14.6 |

GRAPHS

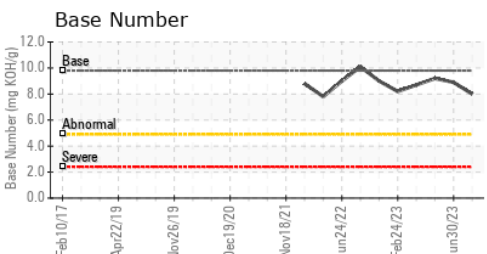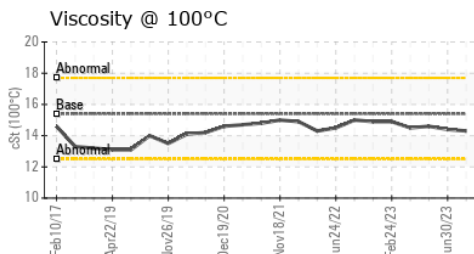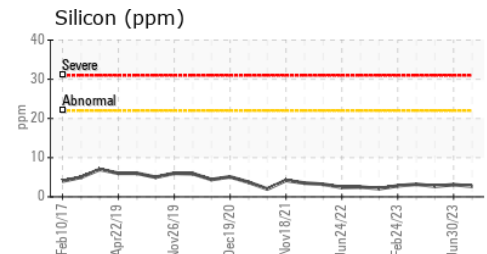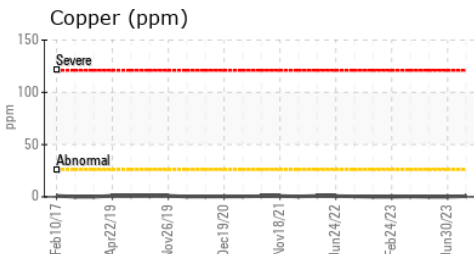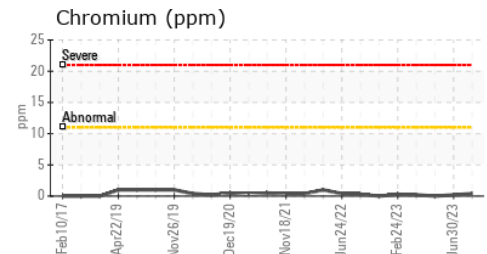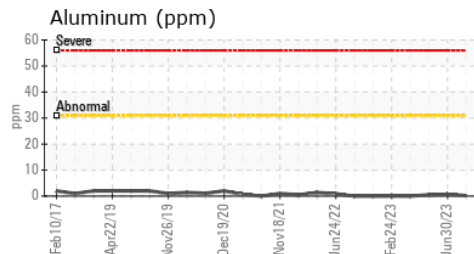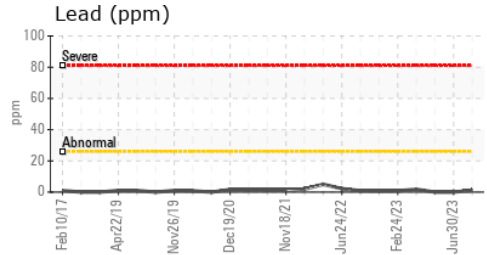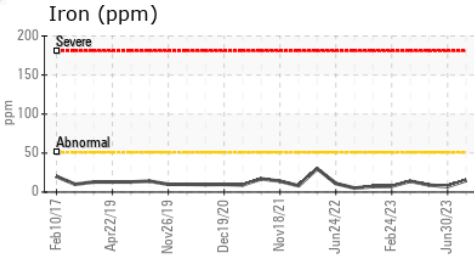

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0084251 **Received** : 05 Sep 2023
Lab Number : 05941991 **Diagnosed** : 07 Sep 2023
Unique Number : 10632603 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)