




OIL ANALYSIS REPORT

Sample Rating Trend

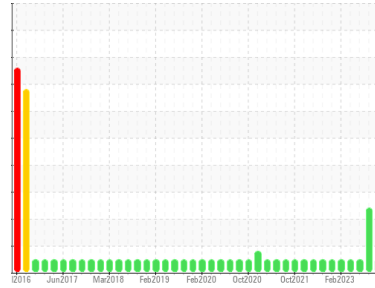

NORMAL



Machine Id
10642C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0087743	GFL0087782	GFL0082225
Sample Date	Client Info	01 Sep 2023	04 Aug 2023	12 May 2023
Machine Age	hrs	7674	116466	13506
Oil Age	hrs	1200	1200	400
Oil Changed	Client Info	Changed	Changed	Not Changed
Sample Status		NORMAL	ABNORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	19	8	11
Chromium	ppm	ASTM D5185m >4	1	<1	<1
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	0	<1	0
Aluminum	ppm	ASTM D5185m >9	1	<1	1
Lead	ppm	ASTM D5185m >30	6	<1	<1
Copper	ppm	ASTM D5185m >35	1	7	1
Tin	ppm	ASTM D5185m >4	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	33	45	19
Barium	ppm	ASTM D5185m 5	0	0	2
Molybdenum	ppm	ASTM D5185m 50	66	60	58
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 560	719	496	568
Calcium	ppm	ASTM D5185m 1510	1966	1463	1706
Phosphorus	ppm	ASTM D5185m 780	985	733	770
Zinc	ppm	ASTM D5185m 870	1164	859	1012
Sulfur	ppm	ASTM D5185m 2040	3161	2394	2484

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	4	8	4
Sodium	ppm	ASTM D5185m	8	▲ 79	6
Potassium	ppm	ASTM D5185m >20	0	▲ 211	1

INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	10.2	7.2	10.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.7	18.6	22.4

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.0	15.5	18.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	6.8	8.1	5.8







OIL ANALYSIS REPORT

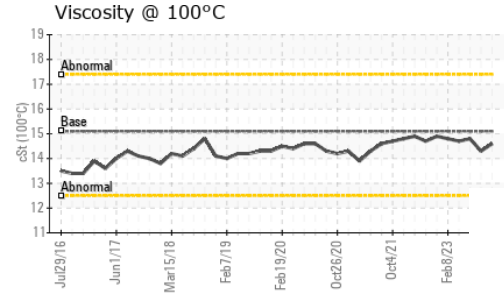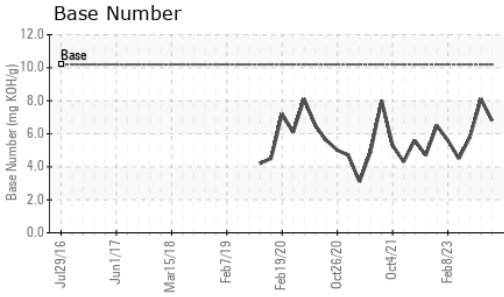

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.6	14.3	14.8

GRAPHS

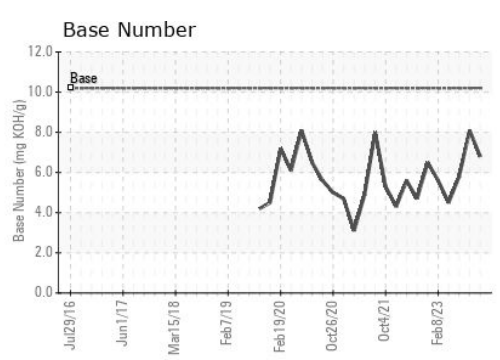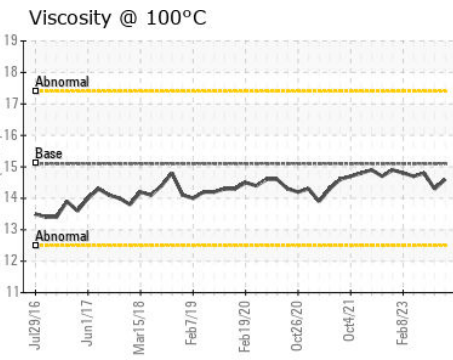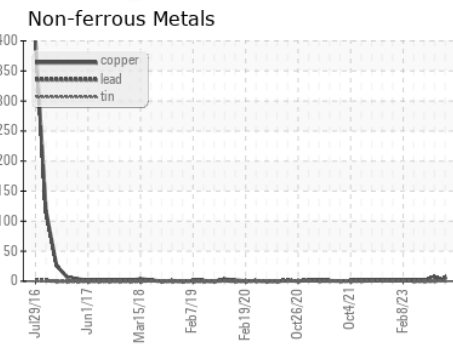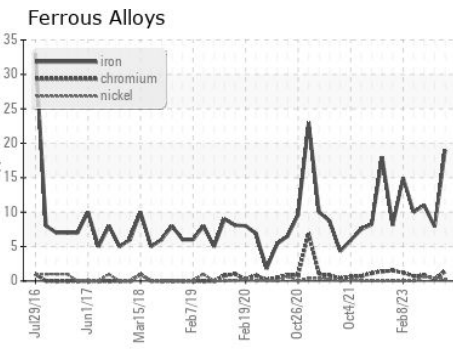

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087743 **Received** : 05 Sep 2023
Lab Number : **05941997** **Diagnosed** : 06 Sep 2023
Unique Number : 10632609 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 006 - Wilmington
 3618 US Highway 421 N
 Wilmington, NC
 US 28401
 Contact: Eric Wood
 eric.wood@gflenv.com
 T: (717)723-1956
 F: (910)762-6880

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)