

PROBLEM SUMMARY

Sample Rating Trend

ISO



Machine Id
CELL 3 CURD BREAKER 1
Component
Gearbox
Fluid
MOBIL SHC CIBUS 460 (--- GAL)



COMPONENT CONDITION SUMMARY

▲ Particle Trend



RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	---	---
Particles >4µm	ASTM D7647	>10000	▲ 51811	---	---
Particles >6µm	ASTM D7647	>2500	▲ 6508	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/16	▲ 23/20/13	---	---

Customer Id: KRANEW
Sample No.: PCA0099637
Lab Number: 05942155
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

HISTORICAL DIAGNOSIS



Machine Id
CELL 3 CURD BREAKER 1
 Component
Gearbox
 Fluid
MOBIL SHC CIBUS 460 (--- GAL)



DIAGNOSIS

Recommendation
 We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0099637	---	---
Sample Date	Client Info	25 Aug 2023	---	---
Machine Age	hrs	0	---	---
Oil Age	hrs	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	3	---
Chromium	ppm	ASTM D5185m >15	0	---
Nickel	ppm	ASTM D5185m >15	0	---
Titanium	ppm	ASTM D5185m	0	---
Silver	ppm	ASTM D5185m	0	---
Aluminum	ppm	ASTM D5185m >25	0	---
Lead	ppm	ASTM D5185m >100	0	---
Copper	ppm	ASTM D5185m >200	0	---
Tin	ppm	ASTM D5185m >25	0	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	11	---
Barium	ppm	ASTM D5185m	2	---
Molybdenum	ppm	ASTM D5185m	0	---
Manganese	ppm	ASTM D5185m	0	---
Magnesium	ppm	ASTM D5185m	<1	---
Calcium	ppm	ASTM D5185m	225	---
Phosphorus	ppm	ASTM D5185m	724	---
Zinc	ppm	ASTM D5185m	5	---
Sulfur	ppm	ASTM D5185m	722	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	7	---
Sodium	ppm	ASTM D5185m	0	---
Potassium	ppm	ASTM D5185m >20	<1	---

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ 51811	---	---
Particles >6µm	ASTM D7647 >2500	▲ 6508	---	---
Particles >14µm	ASTM D7647 >640	69	---	---
Particles >21µm	ASTM D7647 >160	13	---	---
Particles >38µm	ASTM D7647 >40	0	---	---
Particles >71µm	ASTM D7647 >10	0	---	---
Oil Cleanliness	ISO 4406 (c) >20/18/16	▲ 23/20/13	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	---

OIL ANALYSIS REPORT

▲ Particle Trend

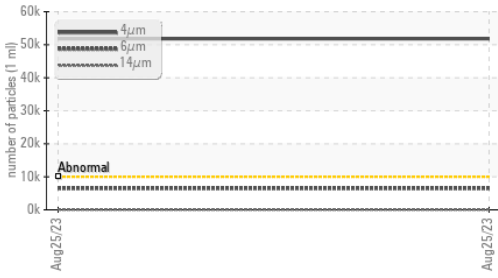


▲ Particle Trend

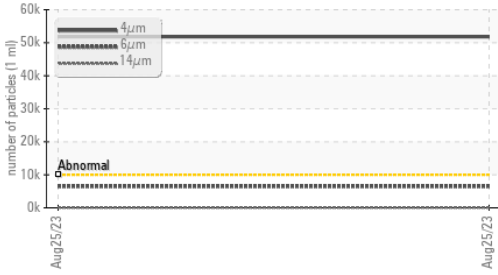

Acid Number



Viscosity @ 40°C

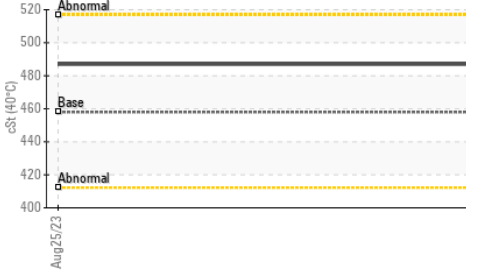

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	458	487	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color				no image	no image
Bottom				no image	no image

GRAPHS

Ferrous Alloys

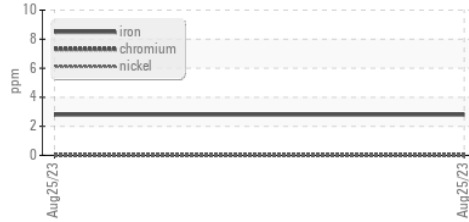


Non-ferrous Metals

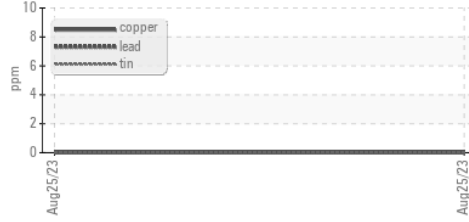

Viscosity @ 40°C



▲ Particle Count

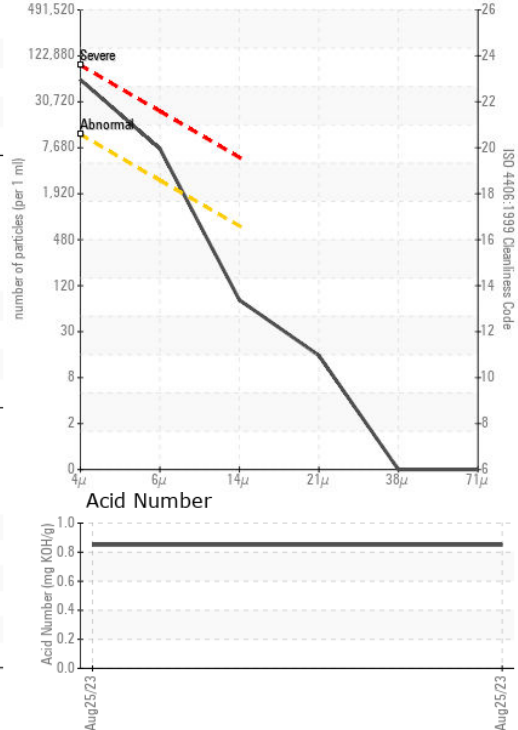

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0099637 **Received** : 05 Sep 2023
Lab Number : 05942155 **Diagnosed** : 07 Sep 2023
Unique Number : 10632767 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: PrtCount)

KraftHeinz - New Ulm - Plant 8302
 2525 S BRIDGE STREET
 NEW ULM, MN
 US 56073
 Contact: RYAN SCHMID
 ryan.schmid@kraftheinz.com
 T: (507)568-0338
 F: (507)354-7927

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)