


COMPONENT CONDITION SUMMARY

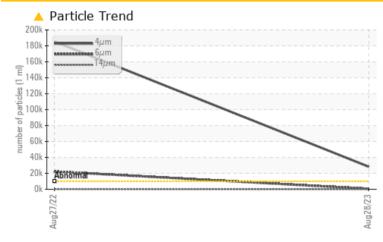

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | | |
|--------------------------|--------------|-----------|-------------------|------------|--|--|--|--|--|
| Sample Status | | | ABNORMAL | ABNORMAL | | | | | |
| Particles >4µm | ASTM D7647 | >10000 | <u> </u> | 🔺 185535 | | | | | |
| Oil Cleanliness | ISO 4406 (c) | >20/18/16 | A 22/16/12 | A 25/22/15 | | | | | |

Customer Id: KRANEW Sample No.: PCA0099612 Lab Number: 05942157 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com ISO

| RECOMMENDE | O ACTIONS | | | |
|---------------|-----------|------|---------|---|
| Action | Status | Date | Done By | Description |
| Change Filter | | | ? | We recommend you service the filters on this component if applicable. |

HISTORICAL DIAGNOSIS

27 Aug 2022 Diag: Jonathan Hester



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Area [98403568] Machine Id CELL 3 AUGER CART Component

Gearbox Fluid

MOBIL SHC CIBUS 460 (--- QTS)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | Aug2022 | Aug2023 | | |
|------------------|----------|--------------|------------|-------------------|----------------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | PCA0099612 | PCA0078701 | |
| Sample Date | | Client Info | | 28 Aug 2023 | 27 Aug 2022 | |
| Machine Age | hrs | Client Info | | 0 | 0 | |
| Oil Age | hrs | Client Info | | 0 | 0 | |
| Oil Changed | | Client Info | | N/A | N/A | |
| Sample Status | | | | ABNORMAL | ABNORMAL | |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 12 | 12 | |
| Chromium | ppm | ASTM D5185m | >15 | 0 | 0 | |
| Nickel | ppm | ASTM D5185m | >15 | 0 | 0 | |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | |
| Silver | ppm | ASTM D5185m | | 0 | 0 | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | <1 | |
| Lead | ppm | ASTM D5185m | >100 | 0 | 0 | |
| Copper | ppm | ASTM D5185m | >200 | 0 | 0 | |
| Tin | ppm | ASTM D5185m | >25 | 0 | 0 | |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 41 | 45 | |
| Barium | ppm | ASTM D5185m | | 2 | 0 | |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | |
| Magnesium | ppm | ASTM D5185m | | 1 | <1 | |
| Calcium | ppm | ASTM D5185m | | 596 | 642 | |
| Phosphorus | ppm | ASTM D5185m | | 510 | 510 | |
| Zinc | ppm | ASTM D5185m | | 23 | 14 | |
| Sulfur | ppm | ASTM D5185m | | 696 | 572 | |
| CONTAMINAN | TS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 3 | 2 | |
| Sodium | ppm | ASTM D5185m | | 0 | <1 | |
| Potassium | ppm | ASTM D5185m | >20 | 1 | 0 | |
| FLUID CLEANL | INESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | A 28358 | 1 85535 | |
| Particles >6µm | | ASTM D7647 | >2500 | 593 | <u> </u> | |
| Particles >14µm | | ASTM D7647 | >640 | 33 | 169 | |
| Particles >21µm | | ASTM D7647 | >160 | 9 | 19 | |
| Particles >38µm | | ASTM D7647 | >40 | 1 | 0 | |
| Particles >71µm | | ASTM D7647 | >10 | 1 | 0 | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/16 | A 22/16/12 | ▲ 25/22/15 | |
| FLUID DEGRAD | DATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.16 | 0.14 | |



0.20

OIL ANALYSIS REPORT

method


limit/base


current

history1

history2

VISUAL

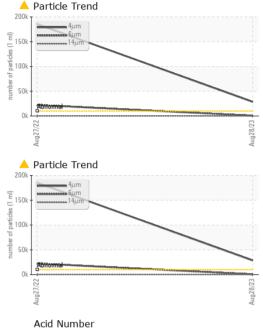

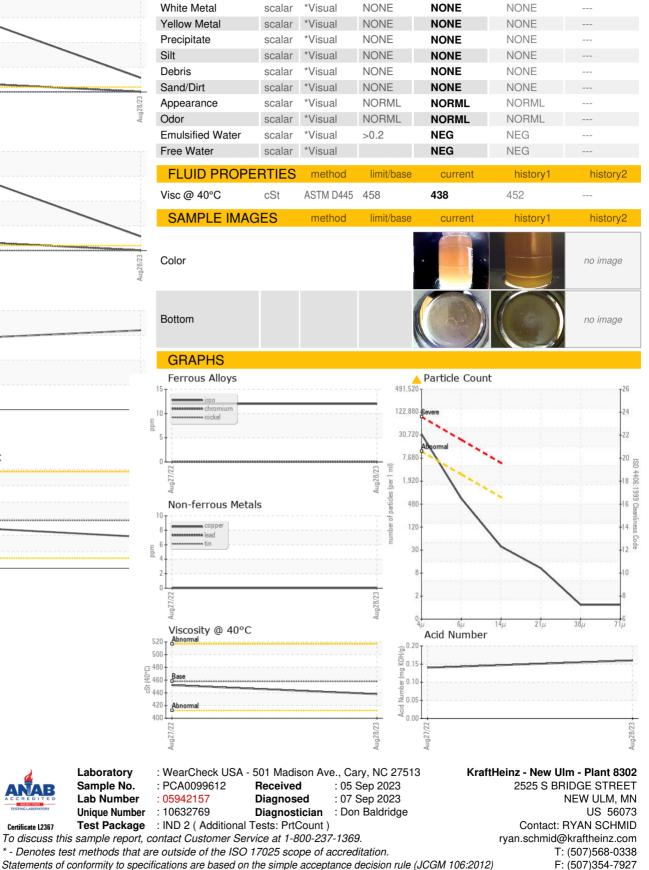

(B/HO) -B 0.05 0.00 Viscosity @ 40°C 52 500 48 40° 460 7 440 420 Ab 400 Aug27/22

Report Id: KRANEW [WUSCAR] 05942157 (Generated: 09/07/2023 12:37:58) Rev: 1

Certificate L2367

Submitted By: RYAN SCHMID

Page 4 of 4