


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**KEMP QUARRIES / PRYOR STONE [65796]**  
Machine Id  
**OHT110**  
Component  
**Differential**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

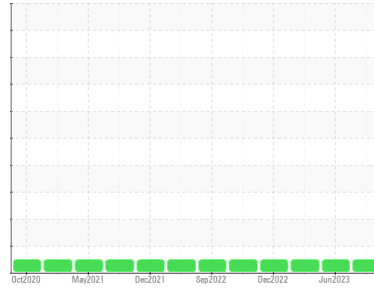

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Pm2 performed. All oil samples taken. Engine oil, transmission oil, and all filters changed. )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084253</b>	PCA0083990	PCA0083922
Sample Date	Client Info		<b>25 Aug 2023</b>	06 Jun 2023	24 Mar 2023
Machine Age	hrs	Client Info	<b>28083</b>	27575	27095
Oil Age	hrs	Client Info	<b>988</b>	480	2183
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>34</b>	17	37
Chromium	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>&lt;1</b>	2	1
Lead	ppm	ASTM D5185m >13	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >103	<b>&lt;1</b>	<1	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 9	<b>14</b>	15	17
Calcium	ppm	ASTM D5185m 3114	<b>3328</b>	3470	2038
Phosphorus	ppm	ASTM D5185m 1099	<b>971</b>	1017	753
Zinc	ppm	ASTM D5185m 1245	<b>1198</b>	1254	952
Sulfur	ppm	ASTM D5185m 7086	<b>4493</b>	4382	3554

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>19</b>	19	11
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	<1


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 213.9	<b>176</b>	176	115

# OIL ANALYSIS REPORT

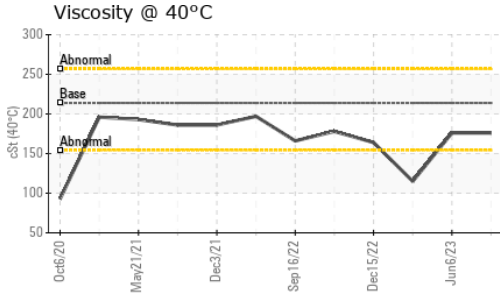

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

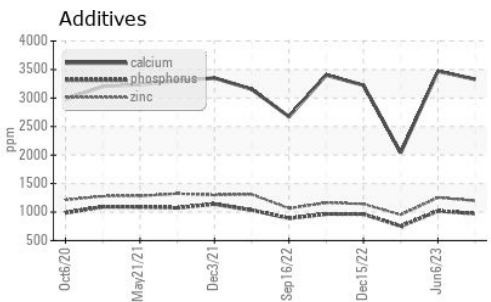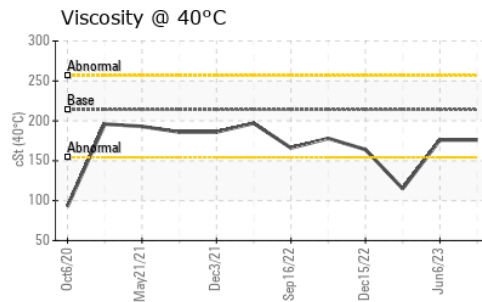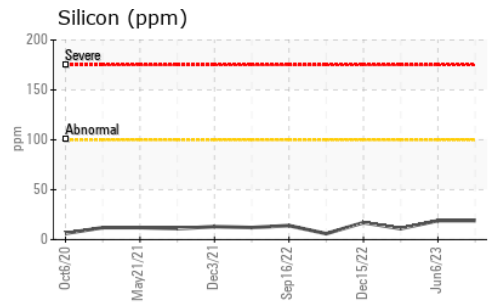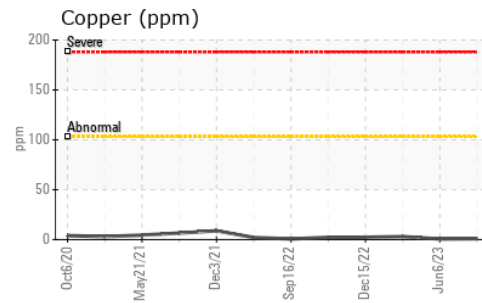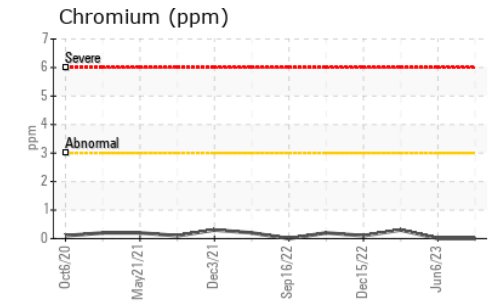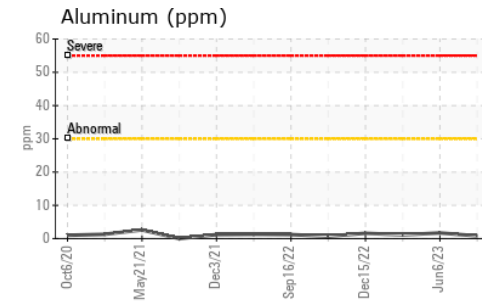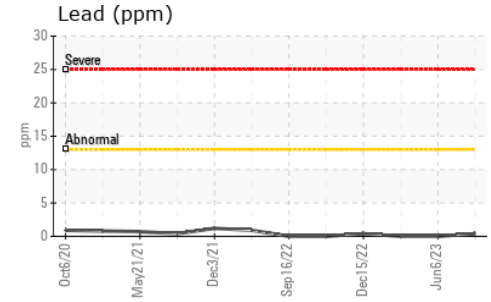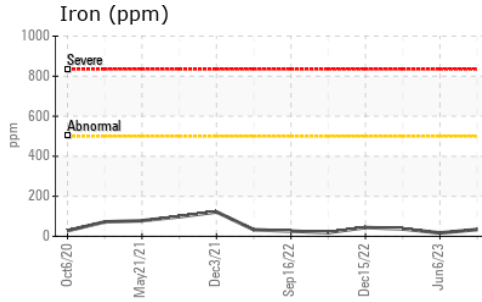

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084253  
**Lab Number** : 05942531  
**Unique Number** : 10633143  
**Test Package** : MOB 1

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361  
 Contact: PRYOR NOTIFICATIONS  
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: