


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

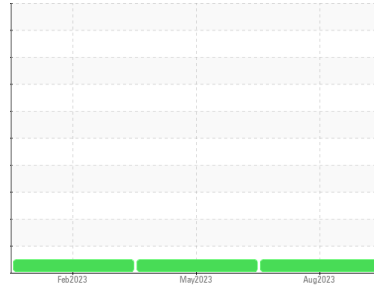

Area  
**(97180X) Walgreens**  
Machine Id  
**[Walgreens] 136A62091**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0094982</b>	PCA0094912	PCA0087971	
Sample Date	Client Info	<b>29 Aug 2023</b>	13 May 2023	27 Feb 2023	
Machine Age	mls	Client Info	<b>545048</b>	484244	441950
Oil Age	mls	Client Info	<b>61244</b>	40000	441950
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>18</b>	19	24
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>7</b>	8	8
Lead	ppm ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm ASTM D5185m >150	<b>4</b>	6	7
Tin	ppm ASTM D5185m >5	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	0	0
Barium	ppm ASTM D5185m 0	<b>0</b>	2	<1
Molybdenum	ppm ASTM D5185m 50	<b>70</b>	61	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 950	<b>981</b>	910	870
Calcium	ppm ASTM D5185m 1050	<b>1206</b>	1073	1096
Phosphorus	ppm ASTM D5185m 995	<b>946</b>	972	888
Zinc	ppm ASTM D5185m 1180	<b>1226</b>	1218	1190
Sulfur	ppm ASTM D5185m 2600	<b>3071</b>	2664	2579

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>4</b>	4	2
Sodium	ppm ASTM D5185m	<b>2</b>	0	1
Potassium	ppm ASTM D5185m >20	<b>10</b>	3	4



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.9</b>	0.8	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>9.7</b>	10.1	10.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.6</b>	22.1	22.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.3</b>	18.0	18.4
Base Number (BN)	mg KOH/g ASTM D2896	<b>4.7</b>	6.9	6.1





# OIL ANALYSIS REPORT

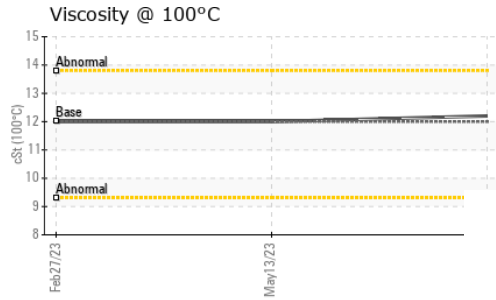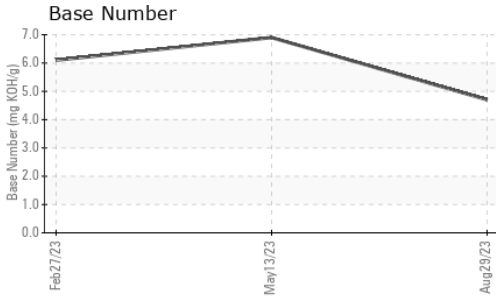

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.2</b>	12.0

## GRAPHS

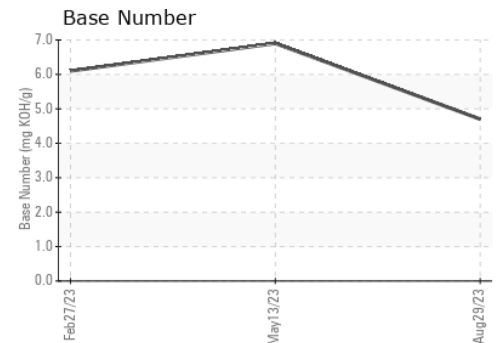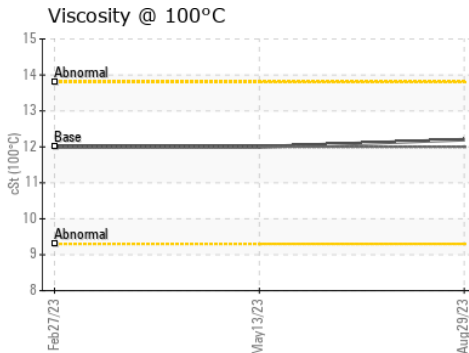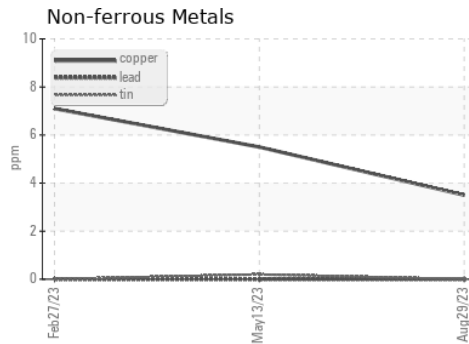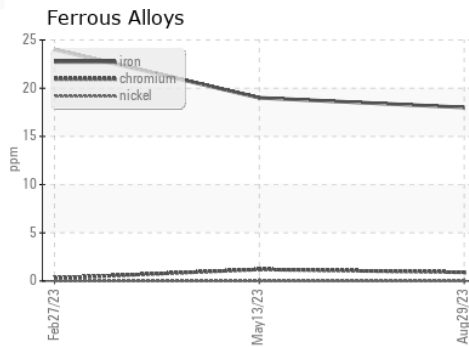

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0094982 **Received** : 06 Sep 2023  
**Lab Number** : **05943243** **Diagnosed** : 07 Sep 2023  
**Unique Number** : 10633855 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1369 - Berkeley-Waxahachie**  
 710 Ovilla Road  
 Waxahachie, TX  
 US 75167  
 Contact: Robert Beal  
 rbeal@transervice.com  
 T: (972)923-9928  
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)