




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**426080-402321**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

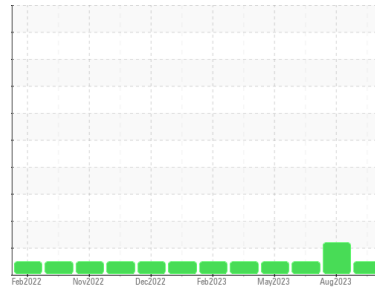

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0088256</b>	GFL0088176	GFL0067726
Sample Date	Client Info	<b>28 Aug 2023</b>	10 Aug 2023	12 Jul 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	<b>4</b>	17	13
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	2	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	5	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>56</b>	58	63
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>937</b>	926	1018
Calcium	ppm	ASTM D5185m 1510	<b>1064</b>	1054	1137
Phosphorus	ppm	ASTM D5185m 780	<b>974</b>	929	1047
Zinc	ppm	ASTM D5185m 870	<b>1214</b>	1174	1268
Sulfur	ppm	ASTM D5185m 2040	<b>3461</b>	3098	3517

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>2</b>	4	3
Sodium	ppm	ASTM D5185m	<b>2</b>	11	13
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	0
Fuel	%	ASTM D3524 >3.0	<b>0.4</b>	▲ 3.3	<1.0

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.7	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.9</b>	9.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.2</b>	19.4	19.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.2</b>	15.5	15.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>8.2</b>	8.6	8.5







# OIL ANALYSIS REPORT

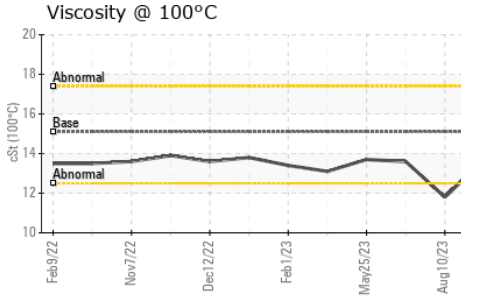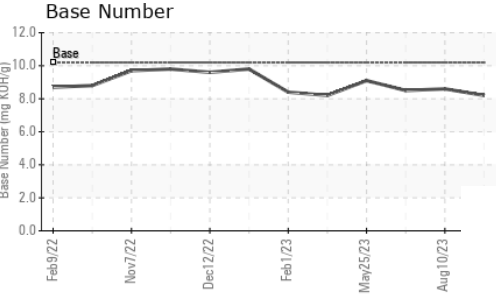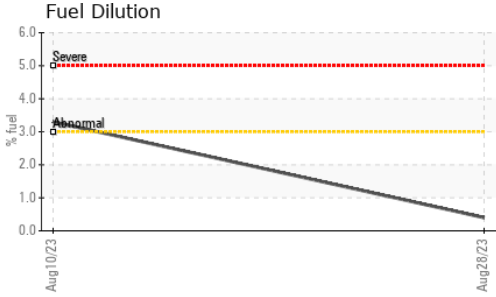

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>13.7</b>	▲ 11.8	13.6

## GRAPHS

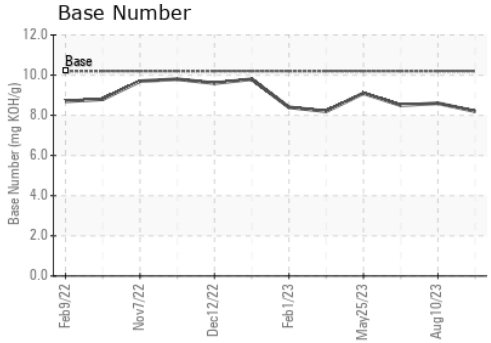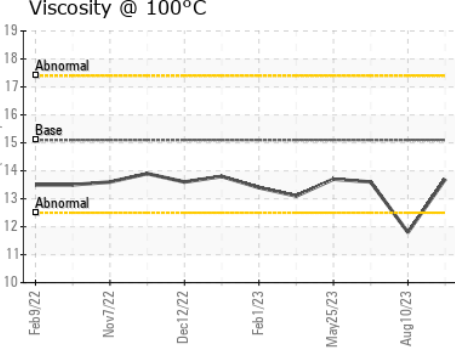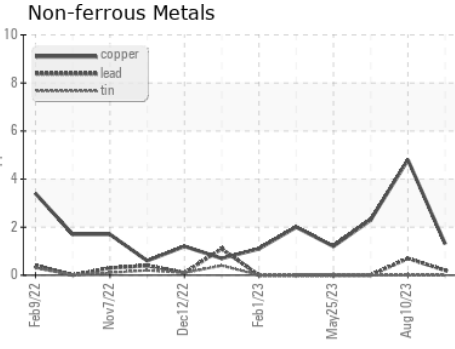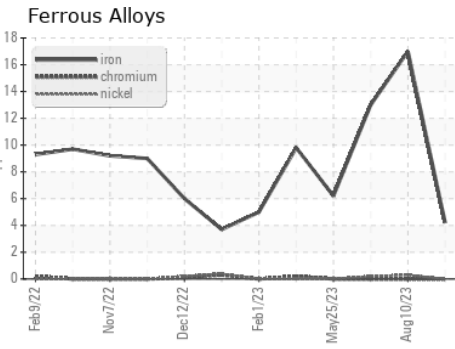

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0088256 **Received** : 06 Sep 2023  
**Lab Number** : **05943264** **Diagnosed** : 08 Sep 2023  
**Unique Number** : 10633876 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 820 - Joplin Hauling**  
 3700 West 7th Street  
 Joplin, MO  
 US 64801  
 Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)