




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

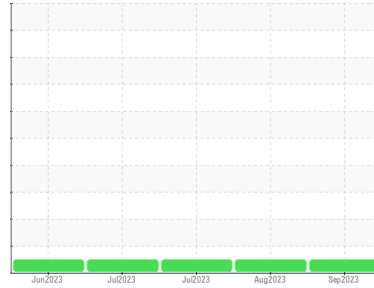

Area  
**{UNASSIGNED}**  
Machine Id  
**933043**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091414</b>	GFL0088765	GFL0088723
Sample Date	Client Info		<b>01 Sep 2023</b>	15 Aug 2023	29 Jul 2023
Machine Age	hrs	Client Info	<b>788</b>	616	462
Oil Age	hrs	Client Info	<b>788</b>	616	462
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>74</b>	62	56
Chromium	ppm	ASTM D5185m >4	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>2</b>	2	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >9	<b>14</b>	12	10
Lead	ppm	ASTM D5185m >30	<b>2</b>	2	0
Copper	ppm	ASTM D5185m >35	<b>18</b>	16	16
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	16	17
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	51	53
Manganese	ppm	ASTM D5185m 0	<b>16</b>	15	14
Magnesium	ppm	ASTM D5185m 1010	<b>828</b>	777	832
Calcium	ppm	ASTM D5185m 1070	<b>1231</b>	1172	1155
Phosphorus	ppm	ASTM D5185m 1150	<b>715</b>	669	703
Zinc	ppm	ASTM D5185m 1270	<b>944</b>	902	935
Sulfur	ppm	ASTM D5185m 2060	<b>2593</b>	2564	2709

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>34</b>	34	35
Sodium	ppm	ASTM D5185m	<b>6</b>	18	4
Potassium	ppm	ASTM D5185m >20	<b>51</b>	47	40

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.2</b>	11.4	11.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.7</b>	22.1	21.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.0</b>	21.4	20.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>3.6</b>	4.0	5.1







# OIL ANALYSIS REPORT

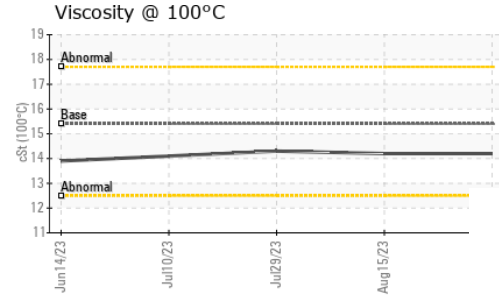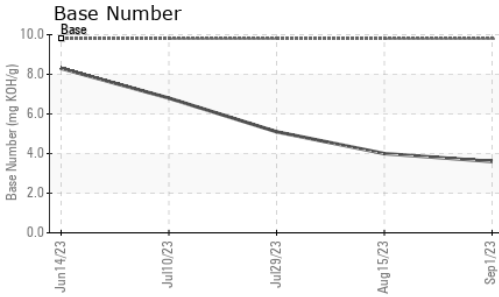

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	14.3

## GRAPHS

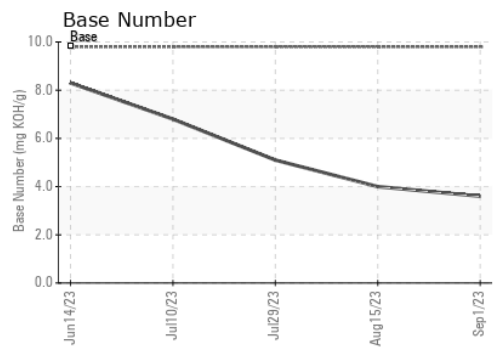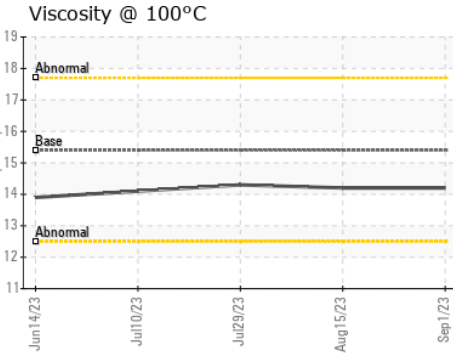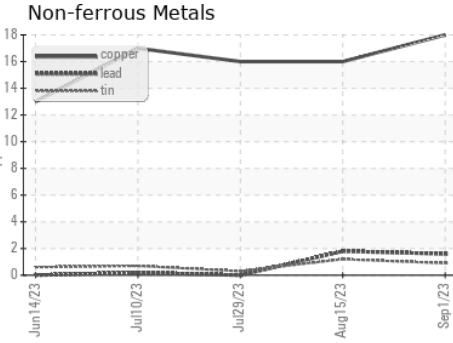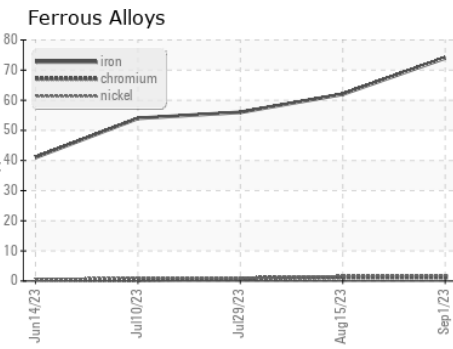

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0091414 Received : 06 Sep 2023  
 Lab Number : 05943274 Diagnosed : 07 Sep 2023  
 Unique Number : 10633886 Diagnostician : Wes Davis  
 Test Package : FLEET

GFL Environmental - 010 - Stockbridge  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: