




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**425075**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

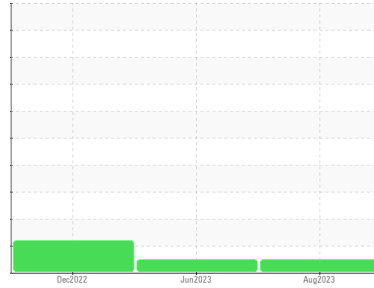

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0072542</b>	GFL0068297	GFL0048310
Sample Date	Client Info		<b>30 Aug 2023</b>	07 Jun 2023	08 Dec 2022
Machine Age	mls	Client Info	<b>432173</b>	9101	9101
Oil Age	mls	Client Info	<b>0</b>	9101	650
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>8</b>	6	6
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m >30	<b>5</b>	<1	2
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	<1	47
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	7	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	63	63
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>955</b>	942	825
Calcium	ppm	ASTM D5185m 1070	<b>1143</b>	1093	1090
Phosphorus	ppm	ASTM D5185m 1150	<b>1000</b>	1039	977
Zinc	ppm	ASTM D5185m 1270	<b>1243</b>	1251	1146
Sulfur	ppm	ASTM D5185m 2060	<b>3613</b>	3662	3373

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	4	<1
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	▲ 83
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	26

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.6</b>	5.3	6.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.4</b>	18.0	19.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.0</b>	13.4	14.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	9.4	10.2







# OIL ANALYSIS REPORT

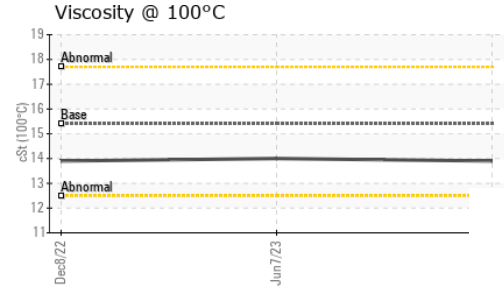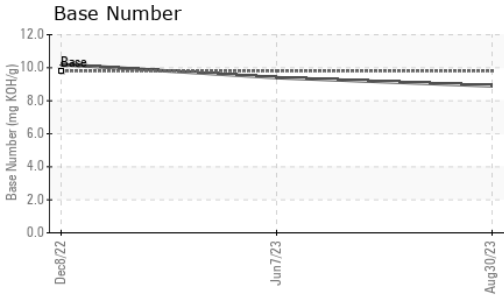

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.0	13.9

## GRAPHS

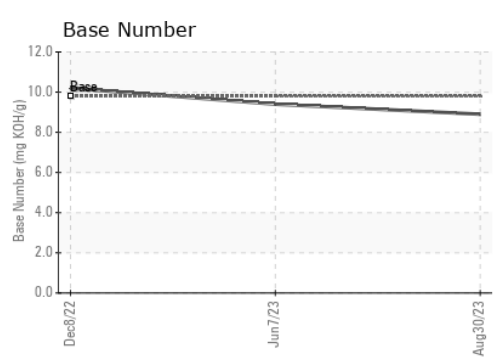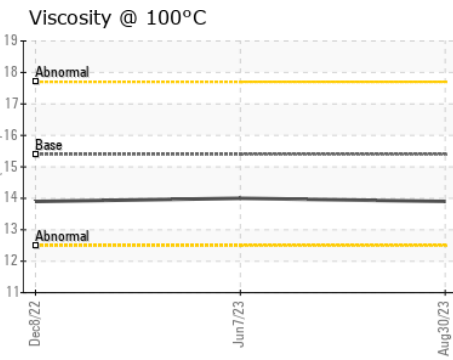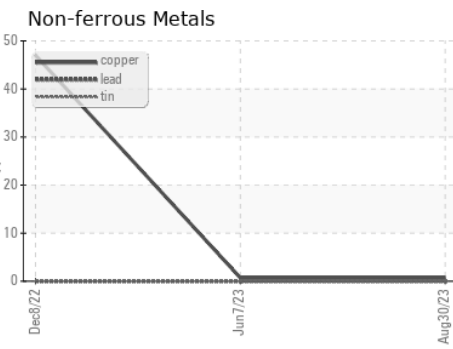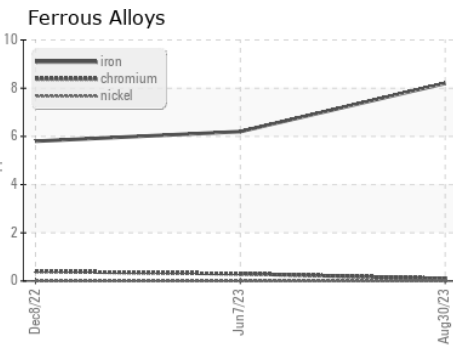

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0072542 **Received** : 06 Sep 2023  
**Lab Number** : **05943280** **Diagnosed** : 07 Sep 2023  
**Unique Number** : 10633892 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 419 - Metro Saginaw**  
 6950 N Michigan  
 Saginaw, MI  
 US 48604  
 Contact: Jeremy Hines  
 jhines@gflenv.com  
 T: (800)684-1277  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)