




OIL ANALYSIS REPORT

Sample Rating Trend

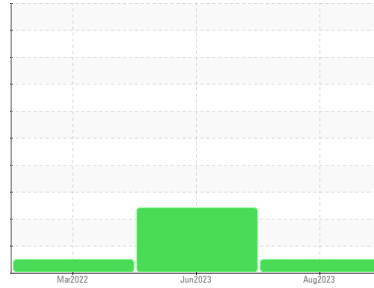

NORMAL



Machine Id

29M

Component

Gasoline Engine

Fluid

GASOLINE ENGINE OIL SAE 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0072540	GFL0068301	GFL0018289
Sample Date	Client Info		30 Aug 2023	08 Jun 2023	26 Mar 2022
Machine Age	mls	Client Info	265994	0	265994
Oil Age	mls	Client Info	265994	0	3000
Oil Changed	Client Info		Not Changed	N/A	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	27	7	49
Chromium	ppm	ASTM D5185m >20	1	<1	3
Nickel	ppm	ASTM D5185m >5	1	0	0
Titanium	ppm	ASTM D5185m	4	0	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >40	19	<1	9
Lead	ppm	ASTM D5185m >50	0	0	0
Copper	ppm	ASTM D5185m >155	3	60	6
Tin	ppm	ASTM D5185m >10	0	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 75	33	12	28
Barium	ppm	ASTM D5185m 5	<1	0	0
Molybdenum	ppm	ASTM D5185m 100	243	79	218
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 12	609	924	661
Calcium	ppm	ASTM D5185m 2100	1318	1084	1401
Phosphorus	ppm	ASTM D5185m 650	724	1019	758
Zinc	ppm	ASTM D5185m 850	887	1224	975
Sulfur	ppm	ASTM D5185m 2500	2553	3342	2008

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	25	10	13
Sodium	ppm	ASTM D5185m >400	3	▲ 524	4
Potassium	ppm	ASTM D5185m >20	2	▲ 28	2

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	---	0.1
Nitration	Abs/cm	*ASTM D7624 >20	11.9	---	15.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.3	---	29.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.6	---	27.5
Base Number (BN)	mg KOH/g	ASTM D2896	4.1	---	4







OIL ANALYSIS REPORT

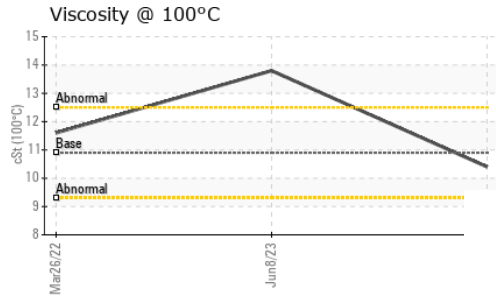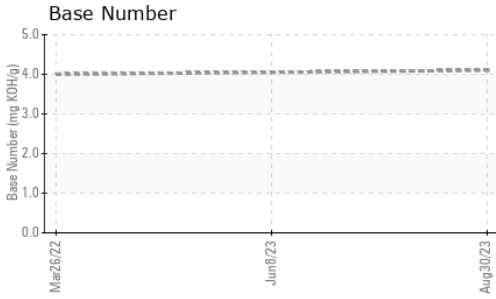

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	10.4	13.8

GRAPHS

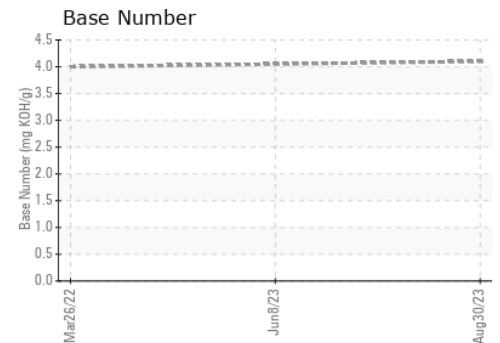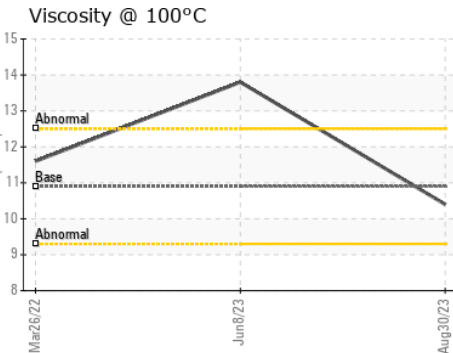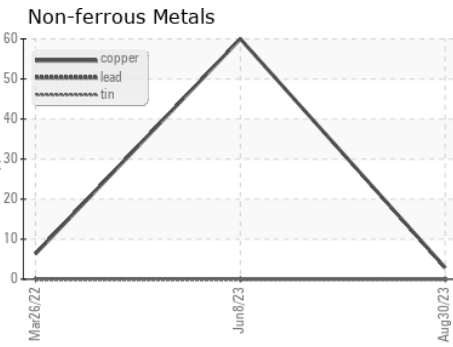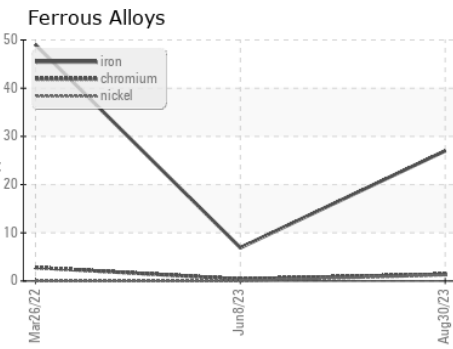

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0072540 Received : 06 Sep 2023
 Lab Number : 05943314 Diagnosed : 08 Sep 2023
 Unique Number : 10633926 Diagnostician : Don Baldrige
 Test Package : FLEET

GFL Environmental - 419 - Metro Saginaw
 6950 N Michigan
 Saginaw, MI
 US 48604
 Contact: Jeremy Hines
 jhines@gflenv.com
 T: (800)684-1277
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)