

OIL ANALYSIS REPORT

Sample Rating Trend

ct2022 Nov2022 Feb2023 Mar2023 Mar2023 Mar2023 Jui2023 Jui2023 Aug2023 Sep





Component Transmission (Auto)

Fluid

PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0091385	GFL0088746	GFL0086100
Sample Date		Client Info		01 Sep 2023	10 Aug 2023	25 Jul 2023
Machine Age	hrs	Client Info		18519	18436	18306
Oil Age	hrs	Client Info		218	1762	1632
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	34	37	40
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	5	5	5
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>225	4	3	3
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		75	85	76
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		4	2	<1
Calcium	ppm	ASTM D5185m		128	126	127
Phosphorus	ppm	ASTM D5185m		222	209	220
Zinc	ppm	ASTM D5185m		3	5	2
Sulfur	ppm	ASTM D5185m		2035	1806	2071
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8	9	8
Sodium	ppm	ASTM D5185m		5	0	3
Potassium	ppm	ASTM D5185m	-	0	<1	0
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor Emulaified Water	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water Free Water	scalar	*Visual	>0.1	NEG	NEG NEG	NEG NEG
	scalar	*Visual	line it d	NEG		
FLUID PROPE		method	limit/base	current	history1	history2
Visc @ 40°C 4:30:18) Rev: 1	cSt	ASTM D445	34	33.3	33.3 Submitted By: JC	33.3 SHUA TINKER
-						

Report Id: GFL010 [WUSCAR] 05944004 (Generated: 09/08/2023 14:30:18) Rev: 1


Page 1 of 2



OIL ANALYSIS REPORT

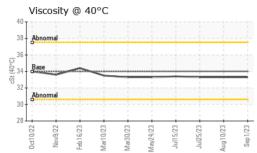

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

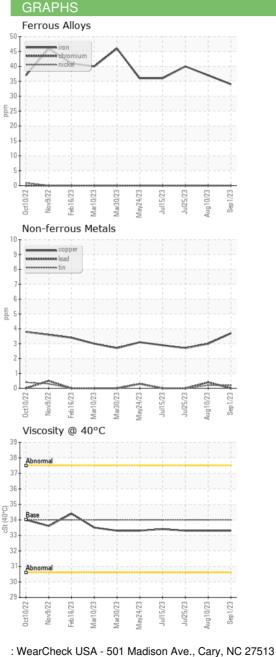

GFL Environmental - 010 - Stockbridge 1280 Rum Creek Parkway Stockbridge, GA US 30281 Contact: JOSHUA TINKER joshuatinker@gflenv.com T: 106:2012) F:



 Vertificate L2367
 Unique Number
 : 10634616
 Diagnostician
 : Sean Felton

 Certificate L2367
 Test Package
 : FLEET
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

: 06 Sep 2023

: 08 Sep 2023

: GFL0091385

: 05944004

Laboratory

Sample No.

Lab Number

Page 2 of 2