




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

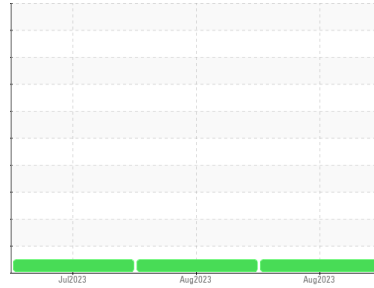

Machine Id  
**934022**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090645</b>	GFL0087222	GFL0083750
Sample Date	Client Info		<b>30 Aug 2023</b>	01 Aug 2023	12 Jul 2023
Machine Age	hrs	Client Info	<b>717</b>	476	301
Oil Age	hrs	Client Info	<b>0</b>	0	301
Oil Changed	Client Info		<b>Not Changed</b>	Not Changd	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>53</b>	8	29
Chromium	ppm	ASTM D5185m >5	<b>3</b>	<1	2
Nickel	ppm	ASTM D5185m >4	<b>2</b>	<1	1
Titanium	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>73</b>	1	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	3	18
Copper	ppm	ASTM D5185m >150	<b>19</b>	<1	2
Tin	ppm	ASTM D5185m >4	<b>2</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>15</b>	31	6
Barium	ppm	ASTM D5185m 5	<b>4</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	51	60
Manganese	ppm	ASTM D5185m 0	<b>13</b>	<1	1
Magnesium	ppm	ASTM D5185m 560	<b>819</b>	511	562
Calcium	ppm	ASTM D5185m 1510	<b>1213</b>	1582	1641
Phosphorus	ppm	ASTM D5185m 780	<b>764</b>	748	727
Zinc	ppm	ASTM D5185m 870	<b>969</b>	892	980
Sulfur	ppm	ASTM D5185m 2040	<b>2870</b>	2243	2508

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>33</b>	4	7
Sodium	ppm	ASTM D5185m	<b>8</b>	<1	9
Potassium	ppm	ASTM D5185m >20	<b>163</b>	3	2

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.7</b>	8.4	12.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.8</b>	19.4	25.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.7</b>	16.5	20.7
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>4.0</b>	6.8	3.1







# OIL ANALYSIS REPORT

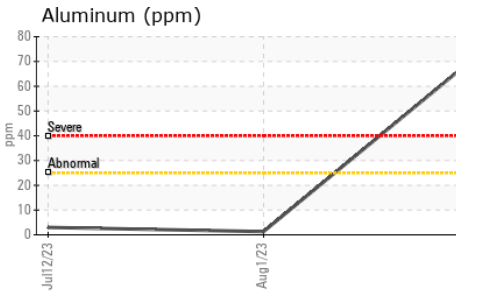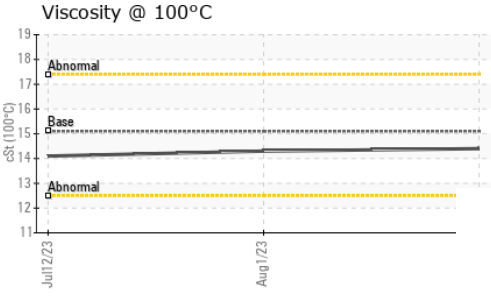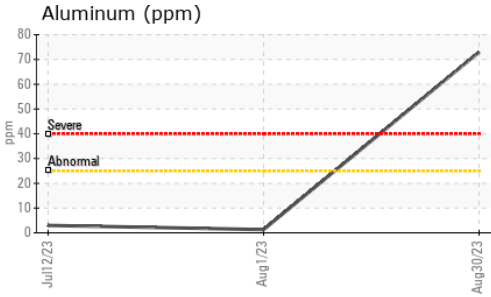

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.4</b>	14.3	14.1

## GRAPHS

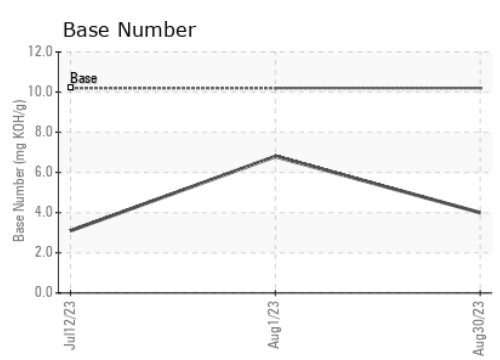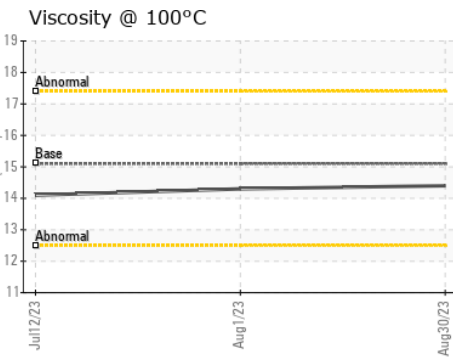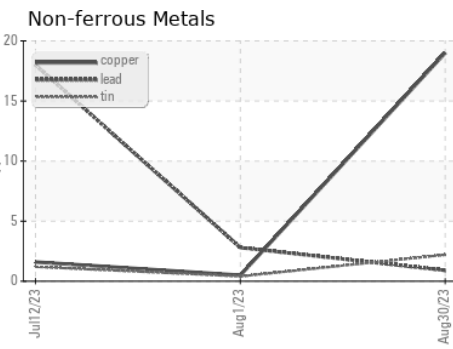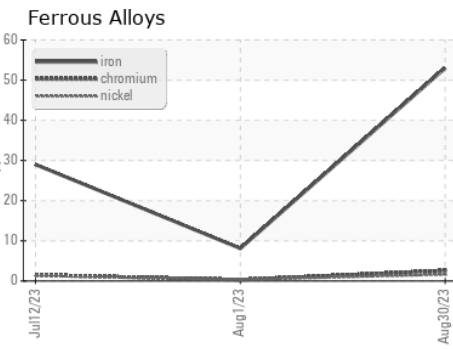

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090645 **Received** : 07 Sep 2023  
**Lab Number** : **05944418** **Diagnosed** : 08 Sep 2023  
**Unique Number** : 10635030 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)