

# **OIL ANALYSIS REPORT**

## **VISCOSITY**




G.LOPES CONSTRUCTION INC./OFF-ROAD

L-96

Component **Rear Differential** 

PETRO CANADA TRAXON 80W90 (--- GAL)





## **DIAGNOSIS**

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the


### ▲ Fluid Condition

The oil viscosity is lower than normal. Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type. The AN level is acceptable for this fluid.

XON 80W90 (	GAL)			Sep2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104554		
Sample Date		Client Info		05 Sep 2023		
Machine Age	hrs	Client Info		5682		
Oil Age	hrs	Client Info		5682		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	267		
Chromium	ppm	ASTM D5185m	>3	1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>2	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>30	4		
Lead	ppm	ASTM D5185m	>13	0		
Copper	ppm	ASTM D5185m	>103	24		
Tin	ppm	ASTM D5185m	>5	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	243	<u> </u>		
Barium	ppm	ASTM D5185m	1	3		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		3		
Magnesium	ppm	ASTM D5185m	2	9		
Calcium	ppm	ASTM D5185m	6	<b>△</b> 3003		
Phosphorus	ppm	ASTM D5185m	987	1071		
Zinc	ppm	ASTM D5185m	1	<u> </u>		
Sulfur	ppm		21530	<u></u> 5839		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>100	6		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.9	0.94		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		
0:EE:16) Dov: 1					Cubmitted Du	LOUANA TTANA



# **OIL ANALYSIS REPORT**

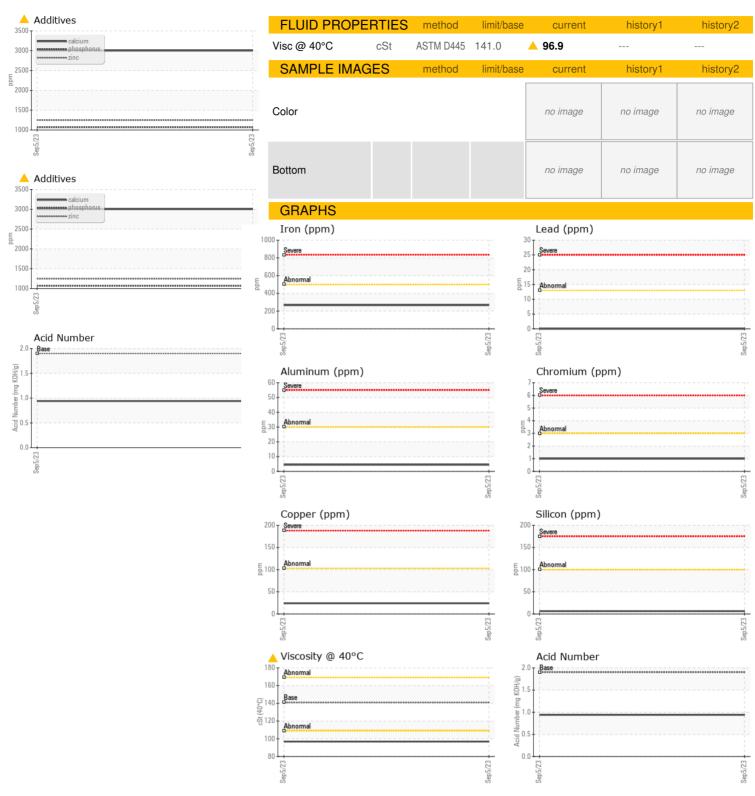





Certificate L2367

Laboratory Sample No. Lab Number Unique Number Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0104554 : 05944732 : 10635344

Diagnosed

: 07 Sep 2023 Received : 10 Sep 2023 Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**G LOPES CONSTRUCTION** 

565 WINTHROP ST TAUNTON, MA US 02780

Contact: BUTCH MCGRATH

bmcgrath@glopes.com

T: F:

Submitted By: MATT MANOLI