

# **PROBLEM SUMMARY**

Sample Rating Trend

DIRT


Machine Id **2026839** 

Component **Transmission** 

NOT GIVEN (--- QTS)



## **COMPONENT CONDITION SUMMARY**

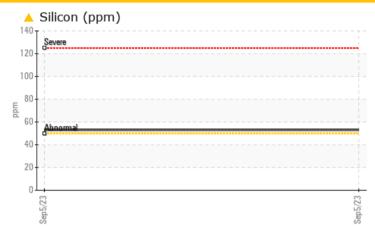

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

# PROBLEMATIC TEST RESULTS Sample Status ABNORMAL -- -- Silicon ppm ASTM D5185m >50 \$ 53 -- --

Customer Id: PERLEWNC
Sample No.: PCA0101102
Lab Number: 05944967
Test Package: FLEET

To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldridge +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

## RECOMMENDED ACTIONS

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend

DIRT

A

2026839

Component

**Transmission** 

NOT GIVEN (--- QTS)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

#### **Fluid Condition**

The condition of the fluid is acceptable for the time in service.

				Sep 2023		
SAMPLE INFOR	ΜΔΤΙΩΝ	method	limit/base	current	history1	history2
			III III Dasc			
Sample Number		Client Info		PCA0101102		
Sample Date	l.	Client Info		05 Sep 2023		
Machine Age	mls	Client Info		298688		
Oil Age Oil Changed	mls	Client Info		298688		
Sample Status		Ciletit IIIIO		Not Changd ABNORMAL		
·				ABNORMAL		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	28		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	4		
Lead	ppm	ASTM D5185m	>50	0		
Copper	ppm	ASTM D5185m	>200	72		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		15		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		6		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		722		
Phosphorus	ppm	ASTM D5185m		627		
Zinc	ppm	ASTM D5185m		19		
Sulfur	ppm	ASTM D5185m		4208		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<u>▲</u> 53		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	3		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2

Visc @ 40°C

cSt


ASTM D445

1.6

---



## **OIL ANALYSIS REPORT**

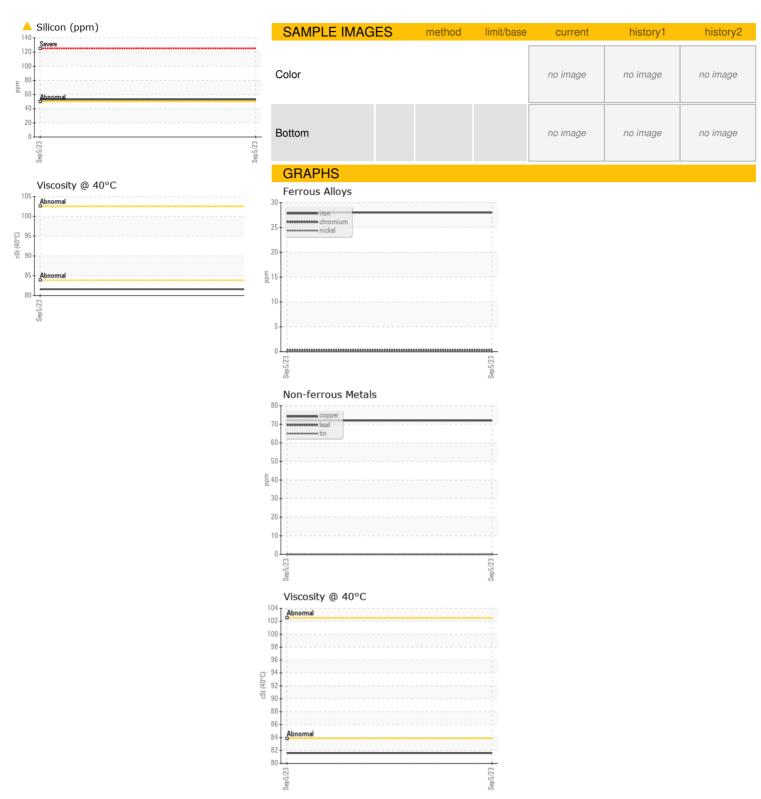



Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10635579 Test Package : FLEET

: PCA0101102 : 05944967

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 07 Sep 2023 Diagnosed : 10 Sep 2023 Diagnostician : Don Baldridge

**PERDUE FARMS - Lewiston** 210 GRIFFINS QUARTER RD LEWISTON, NC

US 27849

Contact: NELSON WALLACE nelson.wallace2@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: