


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

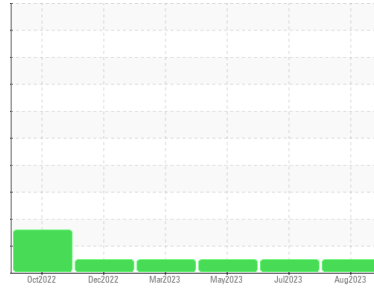

Machine Id  
**2308**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0085454</b>	PCA0085459	PCA0085435
Sample Date	Client Info		<b>29 Aug 2023</b>	12 Jul 2023	08 May 2023
Machine Age	mls	Client Info	<b>118502</b>	99570	81430
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>17</b>	18	21
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>24</b>	20	18
Lead	ppm	ASTM D5185m >40	<b>1</b>	3	3
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>161</b>	205	171
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>119</b>	132	122
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>675</b>	723	654
Calcium	ppm	ASTM D5185m	<b>1586</b>	1711	1560
Phosphorus	ppm	ASTM D5185m 760	<b>711</b>	792	690
Zinc	ppm	ASTM D5185m 800	<b>883</b>	948	844
Sulfur	ppm	ASTM D5185m 3000	<b>2942</b>	3247	2655

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	9	8
Sodium	ppm	ASTM D5185m	<b>2</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>53</b>	44	47




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	9.6	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.5</b>	25.1	24.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.4</b>	20.3	19.7
Base Number (BN)	mg KOH/g	ASTM D2896 10	<b>6.9</b>	7.4	7.2





# OIL ANALYSIS REPORT

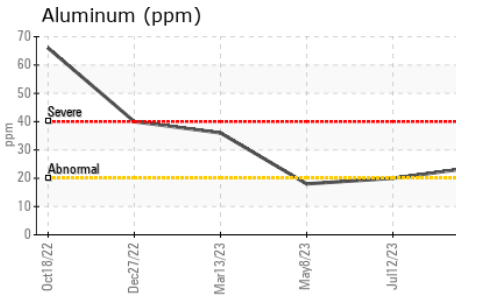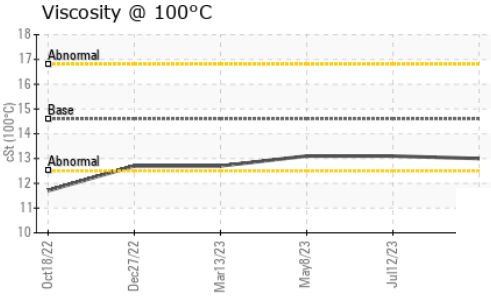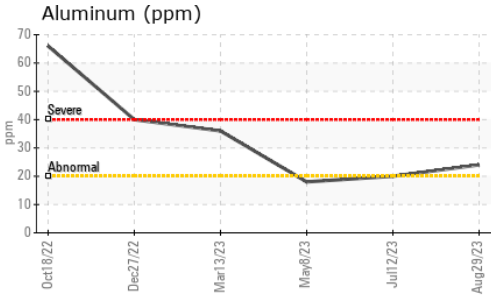

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.6	<b>13.0</b>	13.1

## GRAPHS

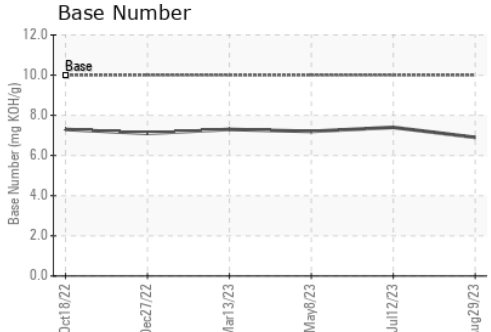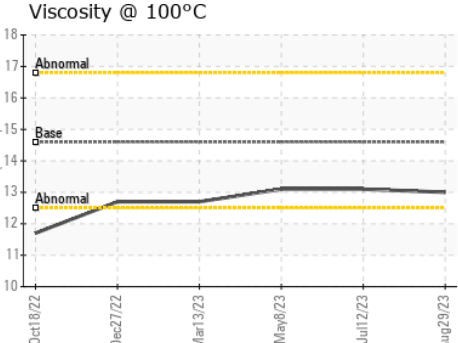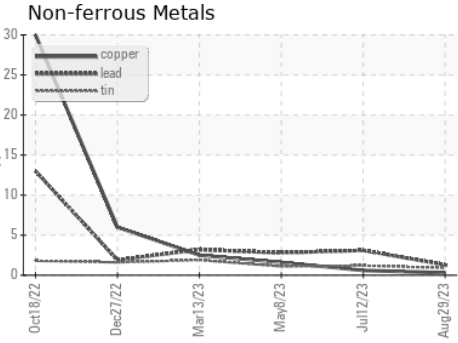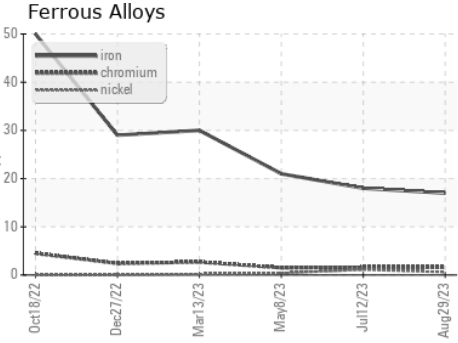

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : PCA0085454  
 Lab Number : **05945057**  
 Unique Number : 10635669  
 Test Package : FLEET  
 Received : 07 Sep 2023  
 Diagnosed : 08 Sep 2023  
 Diagnostician : Wes Davis

**Ergon Trucking Inc. - MAG601**  
 11337 State Route 800  
 Magnolia, OH  
 US 44643  
 Contact: Eddy Smith  
 eddy.smith@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)