




# OIL ANALYSIS REPORT

Sample Rating Trend

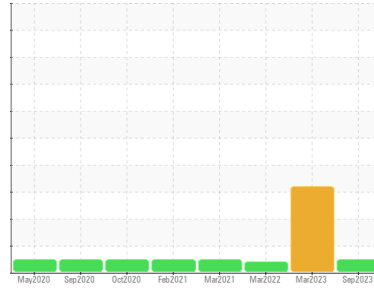

**NORMAL**



Machine Id  
**724006-502**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0079785</b>	GFL0059574	GFL0031013	
Sample Date	Client Info	<b>02 Sep 2023</b>	30 Mar 2023	24 Mar 2022	
Machine Age	hrs	Client Info	<b>16094</b>	288854	260564
Oil Age	hrs	Client Info	<b>599</b>	28290	259743
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Changed	
Sample Status		<b>NORMAL</b>	ABNORMAL	ATTENTION	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	0.1
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>46</b>	▲ 96	19
Chromium	ppm ASTM D5185m >20	<b>2</b>	4	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	1
Titanium	ppm ASTM D5185m	<b>14</b>	10	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>8</b>	▲ 33	1
Lead	ppm ASTM D5185m >40	<b>4</b>	8	<1
Copper	ppm ASTM D5185m >330	<b>157</b>	76	13
Tin	ppm ASTM D5185m >15	<b>2</b>	5	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>14</b>	14	14
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>55</b>	52	56
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>925</b>	801	963
Calcium	ppm ASTM D5185m 1070	<b>1377</b>	1160	1064
Phosphorus	ppm ASTM D5185m 1150	<b>1007</b>	951	1029
Zinc	ppm ASTM D5185m 1270	<b>1312</b>	1157	1177
Sulfur	ppm ASTM D5185m 2060	<b>3447</b>	2473	2703

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>14</b>	▲ 54	4
Sodium	ppm ASTM D5185m	<b>11</b>	26	2
Potassium	ppm ASTM D5185m >20	<b>3</b>	7	0

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.8</b>	1.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>10.3</b>	9.7	6.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.0</b>	21.0	17.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.1</b>	16.1	14.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.2</b>	8.6	11.6







# OIL ANALYSIS REPORT

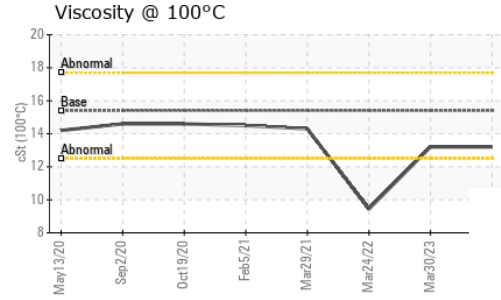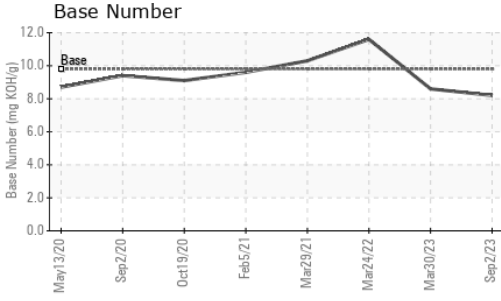

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	▲ 9.44

## GRAPHS

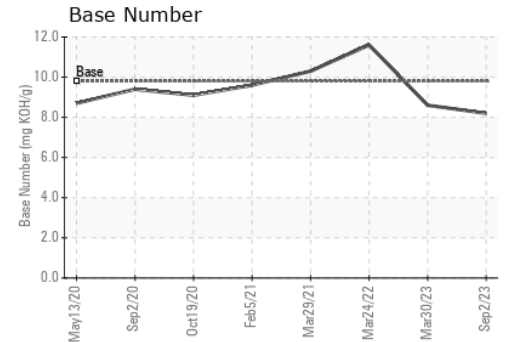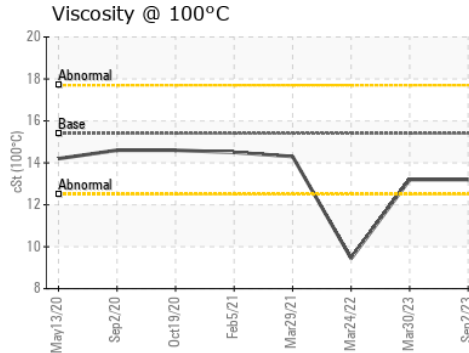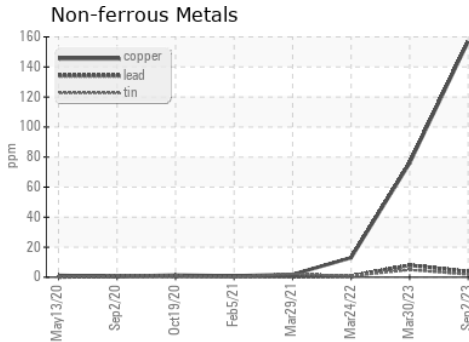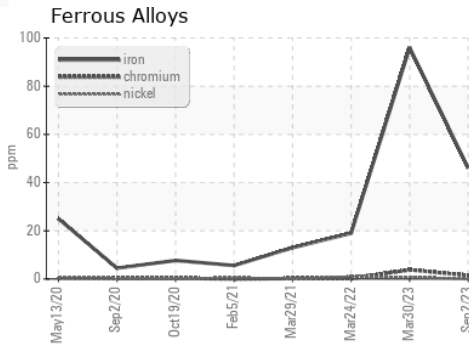

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0079785 Received : 08 Sep 2023  
 Lab Number : 05945364 Diagnosed : 08 Sep 2023  
 Unique Number : 10635976 Diagnostician : Wes Davis  
 Test Package : FLEET

GFL Environmental - 663 - Lake Ariel (Scranton Hauling)  
 17 Industrial Park Rd  
 Lake Ariel, PA  
 US 18436  
 Contact: Eric Merone  
 emerone@countyclecycling.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: