



# PROBLEM SUMMARY

Sample Rating Trend

DIRT



Area  
**166**  
 Machine Id  
**414062**  
 Component  
**1 Diesel Engine**  
 Fluid  
**SAE 0W30 (--- GAL)**




## COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C



▲ Silicon (ppm)

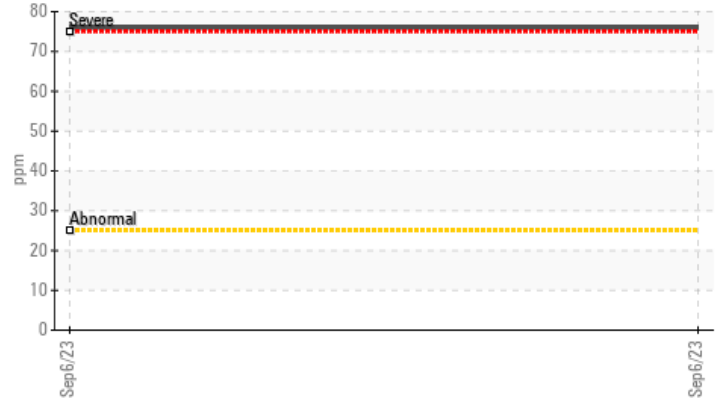

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor. ( Customer Sample Comment: First oil sample with 0w30 factory oil )

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Silicon	ppm	ASTM D5185m	>25	▲ 76	---	---
Visc @ 100°C	cSt	ASTM D445	11.5	▲ 17.7	---	---

Customer Id: GFL166  
 Sample No.: GFL0087864  
 Lab Number: 05945385  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Area  
**166**  
Machine Id  
**414062**  
Component  
**1 Diesel Engine**  
Fluid  
**SAE 0W30 (--- GAL)**

## Sample Rating Trend

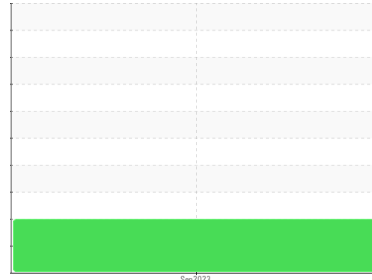

**DIRT**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: First oil sample with 0w30 factory oil )

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0087864</b>	---	---
Sample Date	Client Info	<b>06 Sep 2023</b>	---	---
Machine Age	hrs Client Info	<b>150</b>	---	---
Oil Age	hrs Client Info	<b>150</b>	---	---
Oil Changed	Client Info	<b>Not Chngd</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >120	<b>21</b>	---	---
Chromium ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium ppm	ASTM D5185m >2	<b>0</b>	---	---
Silver ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Aluminum ppm	ASTM D5185m >20	<b>11</b>	---	---
Lead ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper ppm	ASTM D5185m >330	<b>24</b>	---	---
Tin ppm	ASTM D5185m >15	<b>2</b>	---	---
Vanadium ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	<b>406</b>	---	---
Barium ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum ppm	ASTM D5185m	<b>126</b>	---	---
Manganese ppm	ASTM D5185m	<b>4</b>	---	---
Magnesium ppm	ASTM D5185m	<b>736</b>	---	---
Calcium ppm	ASTM D5185m	<b>1579</b>	---	---
Phosphorus ppm	ASTM D5185m	<b>690</b>	---	---
Zinc ppm	ASTM D5185m	<b>845</b>	---	---
Sulfur ppm	ASTM D5185m	<b>2882</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	<b>▲ 76</b>	---	---
Sodium ppm	ASTM D5185m >12	<b>4</b>	---	---
Potassium ppm	ASTM D5185m >20	<b>27</b>	---	---

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.1</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>6.3</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>25.2</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.0</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>9.1</b>	---	---







# OIL ANALYSIS REPORT

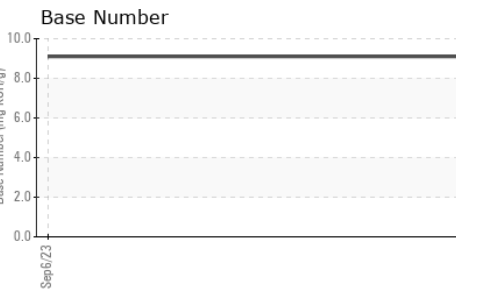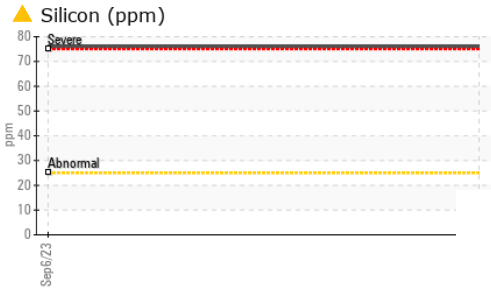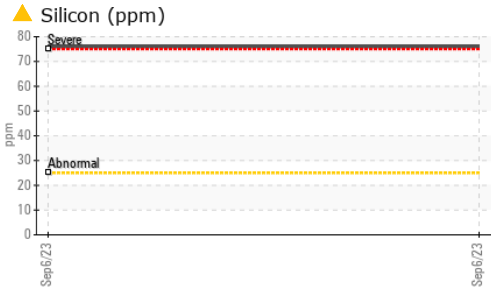

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.5	▲ 17.7	---	---

### GRAPHS

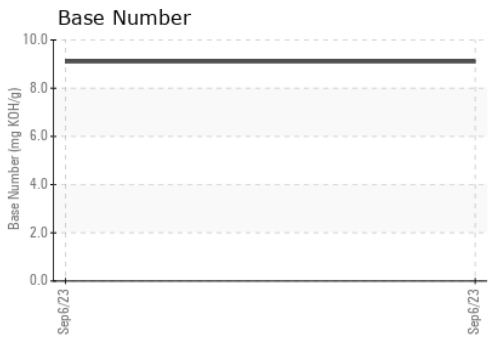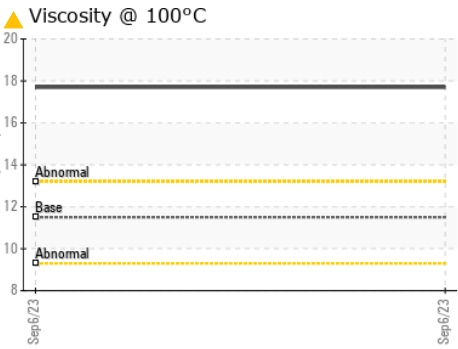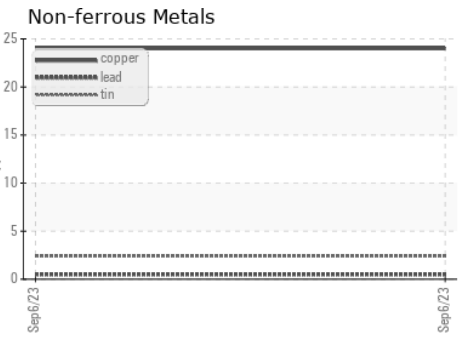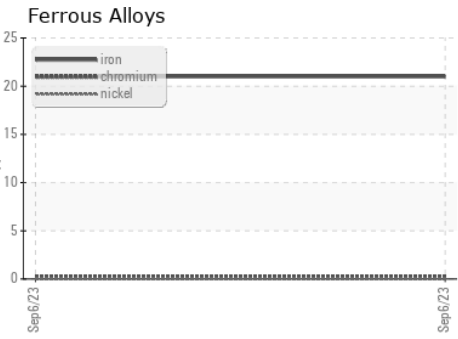

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087864 **Received** : 08 Sep 2023  
**Lab Number** : 05945385 **Diagnosed** : 13 Sep 2023  
**Unique Number** : 10635997 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: EDWARD CASHMAN  
 ecashman@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)