OIL DIAGNOSTICS

PROBLEM SUMMARY

Sample Rating Trend

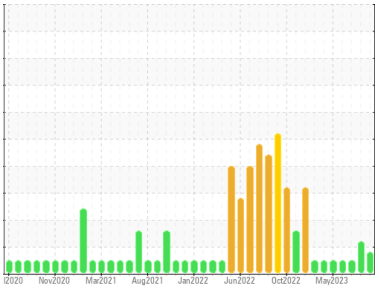

ISO

Area
[98421562]
Machine Id
KR-GR-003111 - WEST DUMPER (S/N MIX C - 11513059)
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 68 (--- GAL)

COMPONENT CONDITION SUMMARY

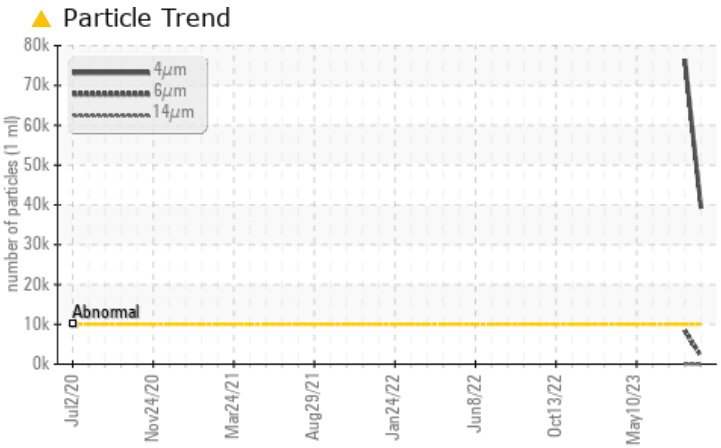

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				**ABNORMAL**	ABNORMAL	NORMAL
Particles >4µm		ASTM D7647	>10000	▲ **39203**	▲ 76404	---
Oil Cleanliness		ISO 4406 (c)	>20/18/16	▲ **22/18/12**	▲ 23/20/14	---

Customer Id: KRAKIR
Sample No.: PCA0103752
Lab Number: 05945691
Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

31 Jul 2023 Diag: Don Baldridge

ISO

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

---

06 Jul 2023 Diag: Angela Borella

NORMAL

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report

---

16 Jun 2023 Diag: Don Baldridge

NORMAL

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report

OIL DIAGNOSTICS

OIL ANALYSIS REPORT

Sample Rating Trend

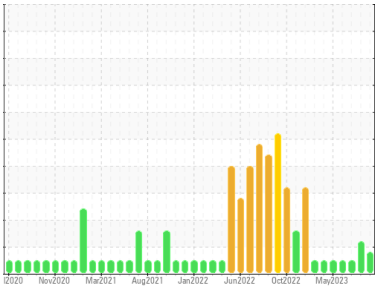

ISO

Area
[98421562]
Machine Id
KR-GR-003111 - WEST DUMPER (S/N MIX C - 11513059)
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PCA0103752**	PCA0102541	PCA0099356
Sample Date		Client Info		**05 Sep 2023**	31 Jul 2023	06 Jul 2023
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**ABNORMAL**	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**<1**	3	2
Chromium	ppm	ASTM D5185m	>20	**0**	<1	<1
Nickel	ppm	ASTM D5185m	>20	**0**	<1	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>20	**1**	0	1
Lead	ppm	ASTM D5185m	>20	**0**	0	0
Copper	ppm	ASTM D5185m	>20	**0**	0	0
Tin	ppm	ASTM D5185m	>20	**0**	0	0
Vanadium	ppm	ASTM D5185m		**<1**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	**0**	0	0
Barium	ppm	ASTM D5185m	5	**0**	0	0
Molybdenum	ppm	ASTM D5185m	5	**0**	0	0
Manganese	ppm	ASTM D5185m		**0**	0	<1
Magnesium	ppm	ASTM D5185m	25	**0**	0	0
Calcium	ppm	ASTM D5185m	200	**0**	0	0
Phosphorus	ppm	ASTM D5185m	300	**430**	332	364
Zinc	ppm	ASTM D5185m	370	**0**	<1	0
Sulfur	ppm	ASTM D5185m	2500	**501**	434	553

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**1**	1	1
Sodium	ppm	ASTM D5185m		**<1**	0	0
Potassium	ppm	ASTM D5185m	>20	**0**	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	▲ **39203**	▲ 76404	---
Particles >6µm		ASTM D7647	>2500	**2014**	▲ 8360	---
Particles >14µm		ASTM D7647	>640	**24**	106	---
Particles >21µm		ASTM D7647	>160	**1**	12	---
Particles >38µm		ASTM D7647	>40	**0**	0	---
Particles >71µm		ASTM D7647	>10	**0**	0	---
Oil Cleanliness		ISO 4406 (c)	>20/18/16	▲ **22/18/12**	▲ 23/20/14	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	**0.19**	0.15	---

OIL ANALYSIS REPORT

OIL DIAGNOSTICS

Particle Trend

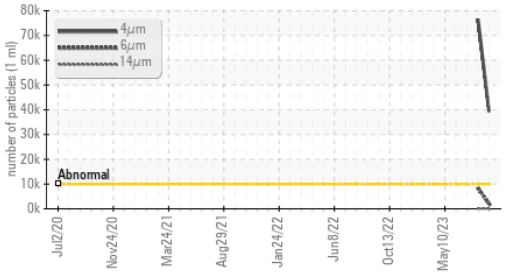

Particle Trend

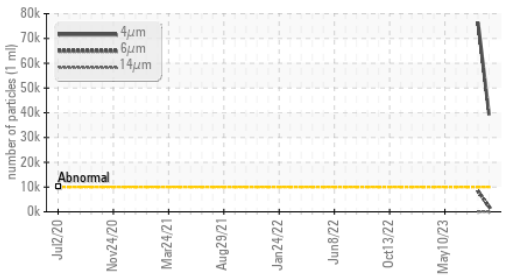

Acid Number

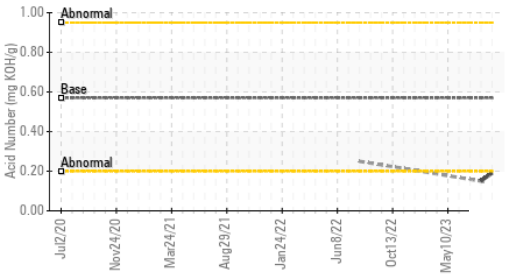

Viscosity @ 40°C

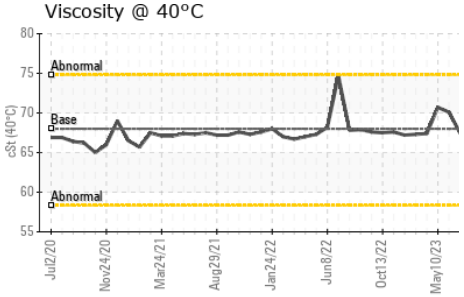

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	**66.2**	67.5	67.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

Ferrous Alloys

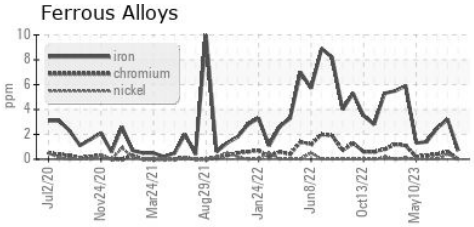

Non-ferrous Metals

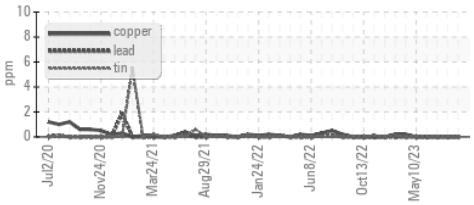

Viscosity @ 40°C

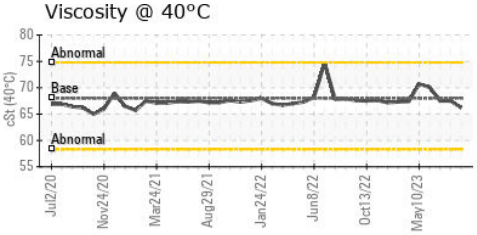

Particle Count

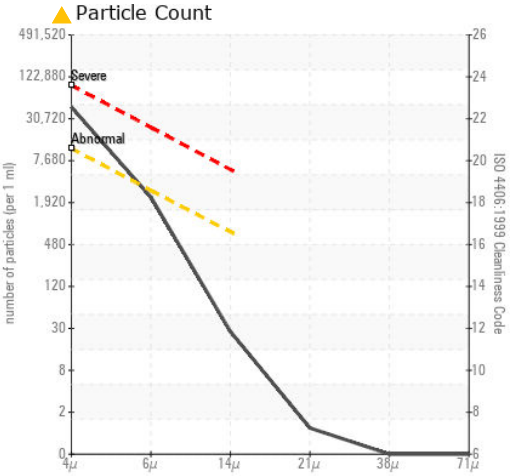

Acid Number

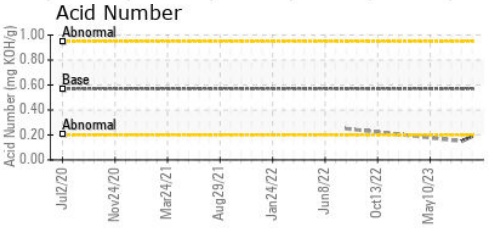

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0103752
Lab Number : 05945691
Unique Number : 10636303
Test Package : IND 2

Received : 08 Sep 2023
Diagnosed : 13 Sep 2023
Diagnostician : Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KraftHeinz - Kirksville - Plant 8333 PCA
2504 INDUSTRIAL DR
KIRKSVILLE, MO
US 63501
Contact: WALLACE WARD
wallace.ward@kraftheinzcompany.com
T: (660)627-1031
F: (660)627-5887