



PROBLEM SUMMARY

Sample Rating Trend


ISO



Area
SCOF [98467499]
 Machine Id
6210/6220
 Component
South Gearbox
 Fluid
GEAR OIL ISO 460 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

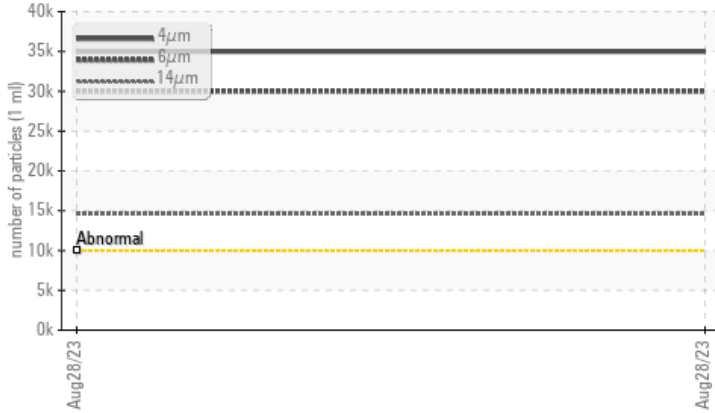

RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	---	---
Particles >4µm	ASTM D7647	>10000	▲ 34973	---	---
Particles >6µm	ASTM D7647	>2500	▲ 30007	---	---
Particles >14µm	ASTM D7647	>640	▲ 14593	---	---
Particles >21µm	ASTM D7647	>160	▲ 7281	---	---
Particles >38µm	ASTM D7647	>40	▲ 280	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/16	▲ 22/22/21	---	---

Customer Id: KRANEW
 Sample No.: PCA0094571
 Lab Number: 05945701
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area
SCOF [98467499]
 Machine Id
6210/6220
 Component
South Gearbox
 Fluid
GEAR OIL ISO 460 (--- QTS)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0094571	---	---
Sample Date	Client Info	28 Aug 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	Filtered	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>200	<1	---	---
Chromium ppm ASTM D5185m	>15	0	---	---
Nickel ppm ASTM D5185m	>15	0	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>25	2	---	---
Lead ppm ASTM D5185m	>100	0	---	---
Copper ppm ASTM D5185m	>200	0	---	---
Tin ppm ASTM D5185m	>25	0	---	---
Vanadium ppm ASTM D5185m		<1	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	50	0	---	---
Barium ppm ASTM D5185m	15	0	---	---
Molybdenum ppm ASTM D5185m	15	0	---	---
Manganese ppm ASTM D5185m		0	---	---
Magnesium ppm ASTM D5185m	50	0	---	---
Calcium ppm ASTM D5185m	50	0	---	---
Phosphorus ppm ASTM D5185m	350	314	---	---
Zinc ppm ASTM D5185m	100	0	---	---
Sulfur ppm ASTM D5185m	12500	384	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>50	<1	---	---
Sodium ppm ASTM D5185m		<1	---	---
Potassium ppm ASTM D5185m	>20	<1	---	---





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>10000	▲ 34973	---	---
Particles >6µm ASTM D7647	>2500	▲ 30007	---	---
Particles >14µm ASTM D7647	>640	▲ 14593	---	---
Particles >21µm ASTM D7647	>160	▲ 7281	---	---
Particles >38µm ASTM D7647	>40	▲ 280	---	---
Particles >71µm ASTM D7647	>10	1	---	---
Oil Cleanliness ISO 4406 (c)	>20/18/16	▲ 22/22/21	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.85	0.26	---	---

OIL ANALYSIS REPORT

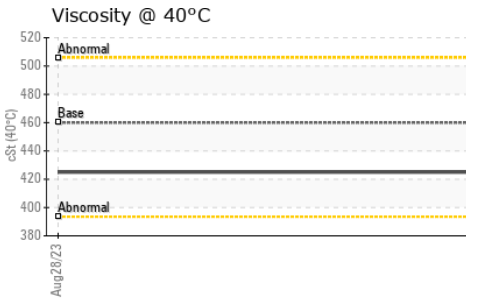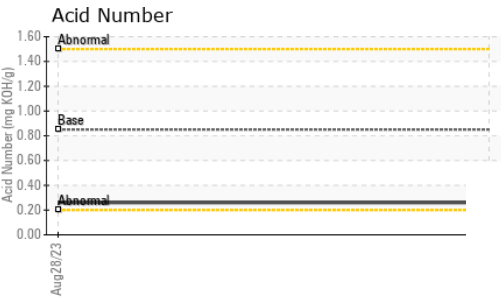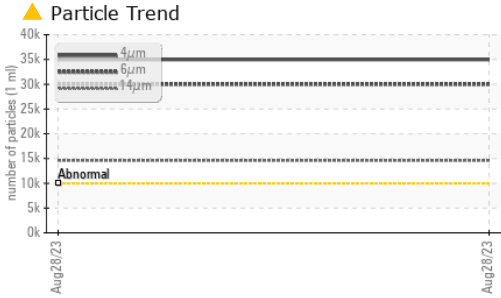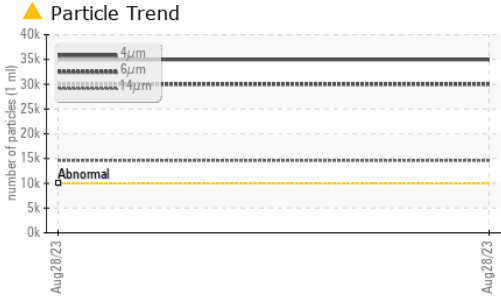







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 460	425	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

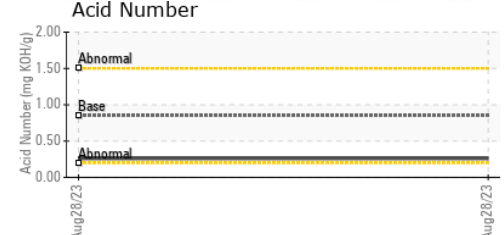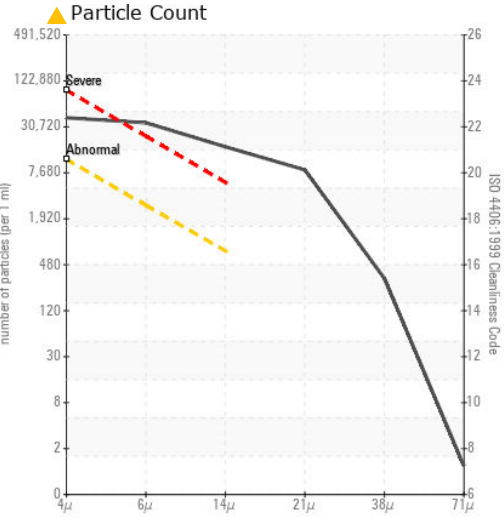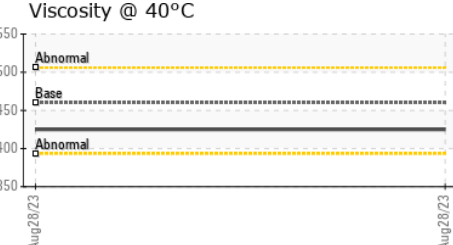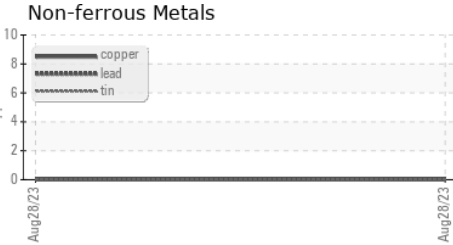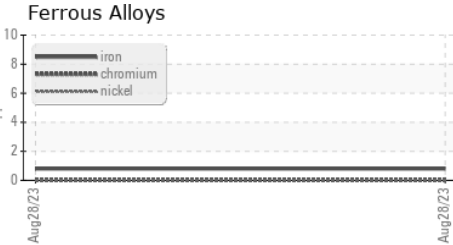

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0094571 **Received** : 08 Sep 2023
Lab Number : 05945701 **Diagnosed** : 13 Sep 2023
Unique Number : 10636313 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: PrtCount)

KraftHeinz - New Ulm - Plant 8302
 2525 S BRIDGE STREET
 NEW ULM, MN
 US 56073
 Contact: RYAN SCHMID
 ryan.schmid@kraftheinz.com
 T: (507)568-0338
 F: (507)354-7927

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)