


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

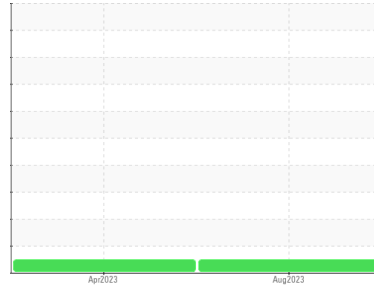

Area  
**(97175X) Walgreens**  
 Machine Id  
**[Walgreens] 136A62086**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0103538</b>	PCA0092930	---
Sample Date	Client Info		<b>30 Aug 2023</b>	05 Apr 2023	---
Machine Age	mls	Client Info	<b>520898</b>	451271	---
Oil Age	mls	Client Info	<b>60000</b>	40000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>40</b>	32	---
Chromium	ppm	ASTM D5185m >5	<b>3</b>	2	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>9</b>	14	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>7</b>	5	---
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	0	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>65</b>	61	---
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185m 950	<b>1181</b>	934	---
Calcium	ppm	ASTM D5185m 1050	<b>1325</b>	1086	---
Phosphorus	ppm	ASTM D5185m 995	<b>1106</b>	992	---
Zinc	ppm	ASTM D5185m 1180	<b>1454</b>	1214	---
Sulfur	ppm	ASTM D5185m 2600	<b>3308</b>	2413	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>12</b>	7	---
Sodium	ppm	ASTM D5185m	<b>3</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>9</b>	12	---



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.5</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.0</b>	8.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.0</b>	20.0	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.7</b>	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.6</b>	5.3	---





# OIL ANALYSIS REPORT

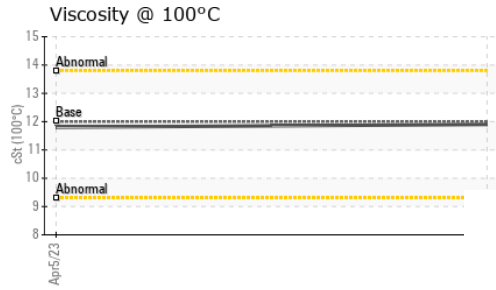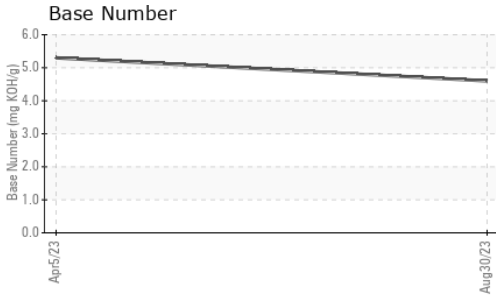

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.9</b>	11.8

## GRAPHS

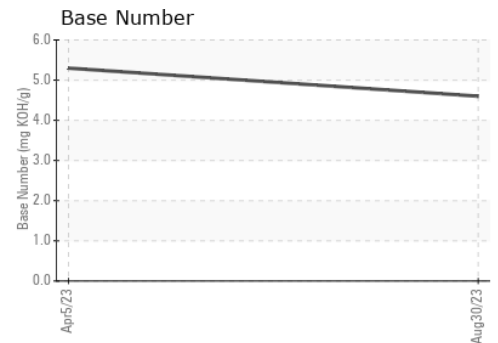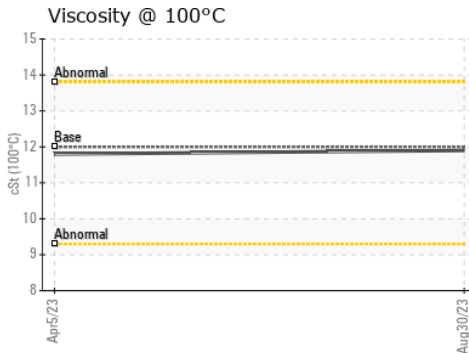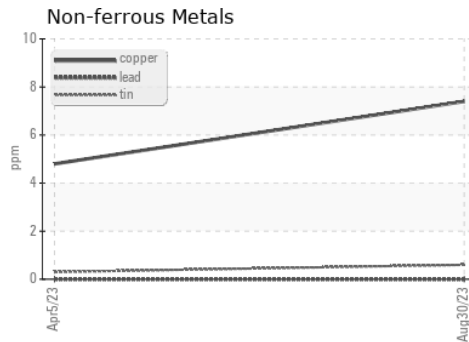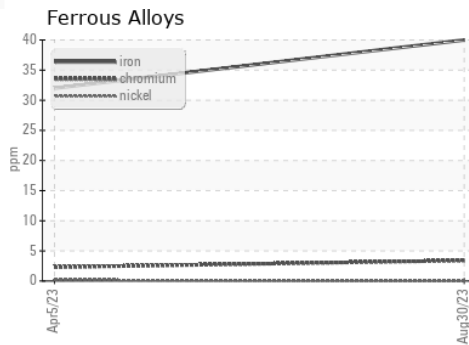

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103538 **Received** : 08 Sep 2023  
**Lab Number** : **05946388** **Diagnosed** : 11 Sep 2023  
**Unique Number** : 10642347 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1369 - Berkeley-Waxahachie**  
 710 Ovilla Road  
 Waxahachie, TX  
 US 75167  
 Contact: Robert Beal  
 rbeal@transervice.com  
 T: (972)923-9928  
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)