

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL



## Area {UNASSIGNED} 834020

Component **Transmission (Auto)** 

Fluid

PETRO CANADA DuraDrive HD Synthetic 668 (8 GAL)

DIAGNOSIS	SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		GFL0091434	GFL0091453	
Resample at the next service interval to monitor.	Sample Date		Client Info		05 Sep 2023	16 Aug 2023	
Wear	Machine Age	hrs	Client Info		352	207	
All component wear rates are normal.	Oil Age	hrs	Client Info		352	207	
Contamination	Oil Changed		Client Info		Not Changd	Not Changd	
There is no indication of any contamination in the	Sample Status				NORMAL	ABNORMAL	
fluid.		0	mathad	limit/base	ourroot	biotoryd	biotory ()
Fluid Condition	WEAR METAI	_5	method		current	history1	history2
The condition of the fluid is acceptable for the time in service.	Iron	ppm	ASTM D5185m		39	28	
	Chromium	ppm	ASTM D5185m		0	0	
	Nickel	ppm	ASTM D5185m		0	0	
	Titanium	ppm	ASTM D5185m		0	<1	
	Silver	ppm	ASTM D5185m		0	0	
	Aluminum	ppm	ASTM D5185m		8	<u> </u>	
	Lead	ppm	ASTM D5185m		<1	0	
	Copper	ppm	ASTM D5185m		8	6	
	Tin	ppm	ASTM D5185m	>5	<1	<1	
	Vanadium	ppm	ASTM D5185m		0	<1	
	Cadmium	ppm	ASTM D5185m		0	0	
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		48	56	
	Barium	ppm	ASTM D5185m		0	0	
	Molybdenum	ppm	ASTM D5185m		<1	0	
	Manganese	ppm	ASTM D5185m		1	1	
	Magnesium	ppm	ASTM D5185m		0	<1	
	Calcium	ppm	ASTM D5185m		123	122	
	Phosphorus	ppm	ASTM D5185m		209	200	
	Zinc	ppm	ASTM D5185m		5	9	
	Sulfur	ppm	ASTM D5185m		1839	1804	
	CONTAMINA	NTS	method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>20	20	<b>A</b> 22	
	Sodium	ppm	ASTM D5185m		6	5	
	Potassium	ppm	ASTM D5185m	>20	3	2	
	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
	Precipitate	scalar	*Visual	NONE	NONE	NONE	
	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	Appearance	scalar	*Visual	NORML	NORML	NORML	
	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	
	Free Water	scalar	*Visual		NEG	NEG	
	FLUID PROPE	ERTIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	34	33.0	33.1	
		000		<i></i>			

Visc @ 40°C Report Id: GFL010 [WUSCAR] 05946805 (Generated: 09/13/2023 09:29:39) Rev: 1

Submitted By: JOSHUA TINKER



## **OIL ANALYSIS REPORT**

no image


no image

no image

no image

no image

no image

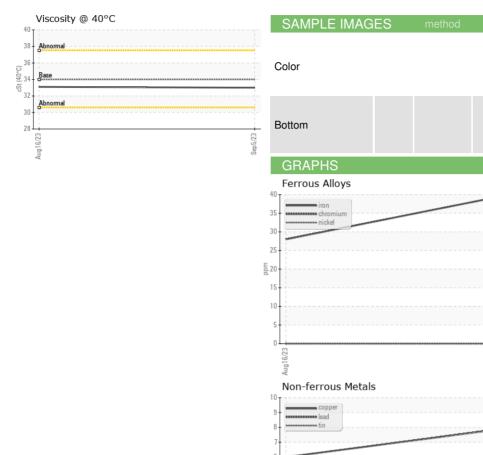

bpm

Aud 1

Aug16/23

: GFL0091434

Laboratory

Sample No.

Viscosity @ 40°C



 Lab Number
 : 05946805
 Diagnosed
 : 13 Sep 2023

 Unique Number
 : 10642764
 Diagnostician
 : Don Baldridge

 Certificate L2367
 Test Package
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Sep5/23

:08 Sep 2023

GFL Environmental - 010 - Stockbridge 1280 Rum Creek Parkway Stockbridge, GA US 30281 Contact: JOSHUA TINKER joshuatinker@gflenv.com T: 106:2012) F:

Page 2 of 2