



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
{UNASSIGNED}
 Machine Id
933042
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (8 GAL)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info | GFL0091438 | --- | --- |
| Sample Date | Client Info | 05 Sep 2023 | --- | --- |
| Machine Age | hrs Client Info | 347 | --- | --- |
| Oil Age | hrs Client Info | 347 | --- | --- |
| Oil Changed | Client Info | Not Chngd | --- | --- |
| Sample Status | | NORMAL | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|--------------|------------------|--------------|----------|----------|
| Iron ppm | ASTM D5185m >230 | 35 | --- | --- |
| Chromium ppm | ASTM D5185m >2 | 0 | --- | --- |
| Nickel ppm | ASTM D5185m >5 | 0 | --- | --- |
| Titanium ppm | ASTM D5185m >2 | 0 | --- | --- |
| Silver ppm | ASTM D5185m >5 | 0 | --- | --- |
| Aluminum ppm | ASTM D5185m >65 | 2 | --- | --- |
| Lead ppm | ASTM D5185m >55 | <1 | --- | --- |
| Copper ppm | ASTM D5185m >85 | 4 | --- | --- |
| Tin ppm | ASTM D5185m >5 | <1 | --- | --- |
| Vanadium ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|----------------|-------------|--------------|----------|----------|
| Boron ppm | ASTM D5185m | 54 | --- | --- |
| Barium ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum ppm | ASTM D5185m | <1 | --- | --- |
| Manganese ppm | ASTM D5185m | 1 | --- | --- |
| Magnesium ppm | ASTM D5185m | 0 | --- | --- |
| Calcium ppm | ASTM D5185m | 125 | --- | --- |
| Phosphorus ppm | ASTM D5185m | 211 | --- | --- |
| Zinc ppm | ASTM D5185m | 6 | --- | --- |
| Sulfur ppm | ASTM D5185m | 1926 | --- | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|----------|----------|----------|
| Silicon ppm | ASTM D5185m >20 | 4 | --- | --- |
| Sodium ppm | ASTM D5185m | 6 | --- | --- |
| Potassium ppm | ASTM D5185m >20 | 3 | --- | --- |

VISUAL


| method | limit/base | current | history1 | history2 |
|-------------------------|---------------|--------------|----------|----------|
| White Metal scalar | *Visual NONE | LIGHT | --- | --- |
| Yellow Metal scalar | *Visual NONE | NONE | --- | --- |
| Precipitate scalar | *Visual NONE | NONE | --- | --- |
| Silt scalar | *Visual NONE | NONE | --- | --- |
| Debris scalar | *Visual NONE | NONE | --- | --- |
| Sand/Dirt scalar | *Visual NONE | NONE | --- | --- |
| Appearance scalar | *Visual NORML | NORML | --- | --- |
| Odor scalar | *Visual NORML | NORML | --- | --- |
| Emulsified Water scalar | *Visual >0.1 | NEG | --- | --- |
| Free Water scalar | *Visual | NEG | --- | --- |

FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|-----------------|--------------|-------------|----------|----------|
| Visc @ 40°C cSt | ASTM D445 34 | 32.0 | --- | --- |






OIL ANALYSIS REPORT

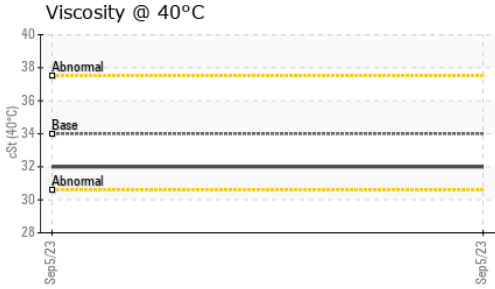

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|----------|----------|----------|
| Color | | | no image | no image | no image |
| Bottom | | | no image | no image | no image |

GRAPHS

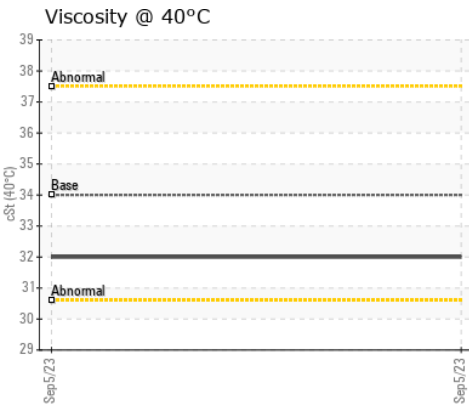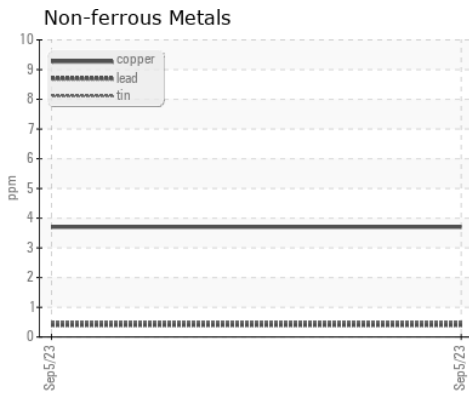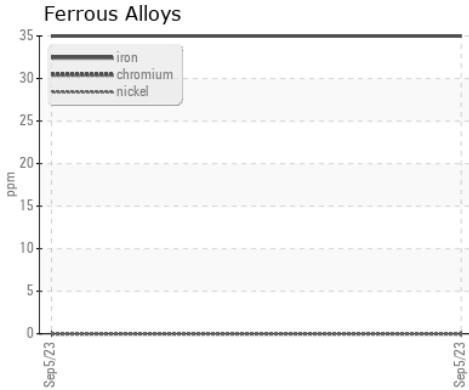

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0091438 **Received** : 08 Sep 2023
Lab Number : 05946806 **Diagnosed** : 13 Sep 2023
Unique Number : 10642765 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: