




PROBLEM SUMMARY

Sample Rating Trend

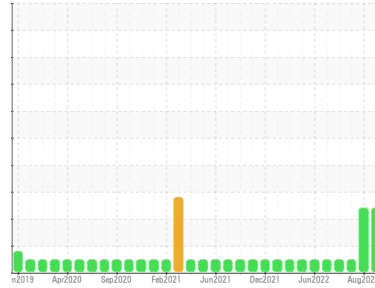


COOL CHEMICALS



Machine Id
3848C
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (9 GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

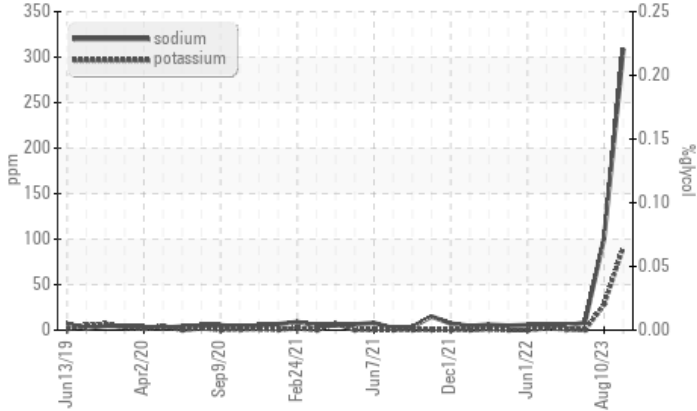

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	NORMAL
Sodium	ppm	ASTM D5185m	▲ 309	▲ 101	8
Potassium	ppm	ASTM D5185m >20	▲ 91	▲ 28	0

Customer Id: GFL331
 Sample No.: GFL0087467
 Lab Number: 05946881
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

10 Aug 2023 Diag: Jonathan Hester

COOL CHEMICALS



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



24 Mar 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



09 Jan 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

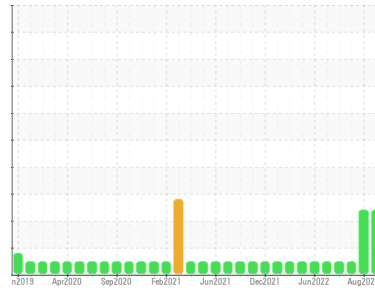

COOL CHEMICALS



Machine Id
3848C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (9 GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0087467	GFL0087543	GFL0071792	
Sample Date	Client Info	07 Sep 2023	10 Aug 2023	24 Mar 2023	
Machine Age	hrs	Client Info	11314	11125	10178
Oil Age	hrs	Client Info	1136	947	1107
Oil Changed	Client Info	Changed	Not Changd	Changed	
Sample Status		ABNORMAL	ABNORMAL	NORMAL	

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	15	9	10
Chromium	ppm	ASTM D5185m >4	4	3	2
Nickel	ppm	ASTM D5185m >2	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	3	3	3
Lead	ppm	ASTM D5185m >30	17	5	7
Copper	ppm	ASTM D5185m >35	2	<1	3
Tin	ppm	ASTM D5185m >4	<1	1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	16	15	15
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 50	76	63	64
Manganese	ppm	ASTM D5185m 0	1	<1	1
Magnesium	ppm	ASTM D5185m 560	653	612	710
Calcium	ppm	ASTM D5185m 1510	1842	1719	1959
Phosphorus	ppm	ASTM D5185m 780	817	792	886
Zinc	ppm	ASTM D5185m 870	1113	1059	1237
Sulfur	ppm	ASTM D5185m 2040	3096	3045	3029

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	13	9	7
Sodium	ppm	ASTM D5185m	▲ 309	▲ 101	8
Potassium	ppm	ASTM D5185m >20	▲ 91	▲ 28	0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	11.9	11.2	12.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.2	23.8	25.8

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.4	20.3	21.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	4.7	4.4	4.9







OIL ANALYSIS REPORT

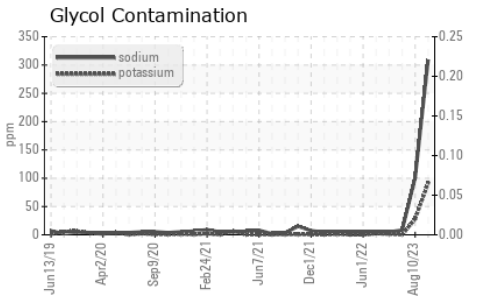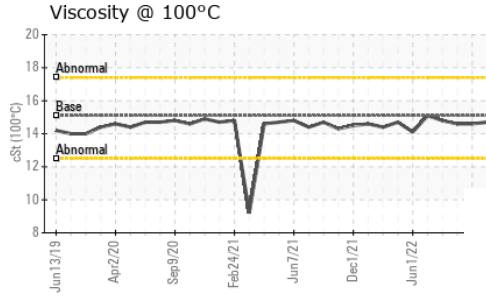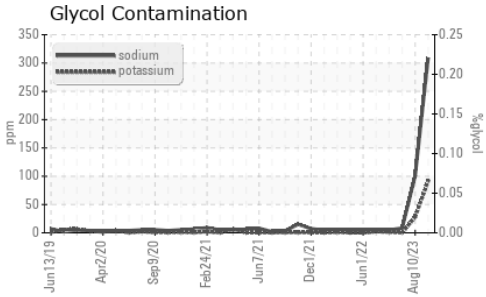

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.7	14.6

GRAPHS

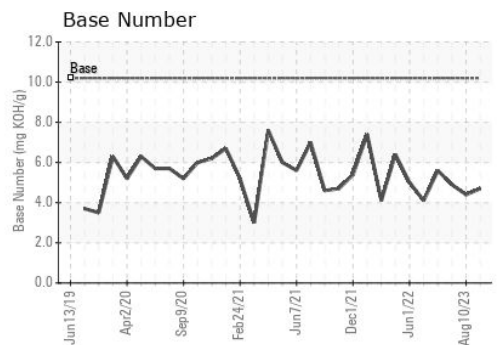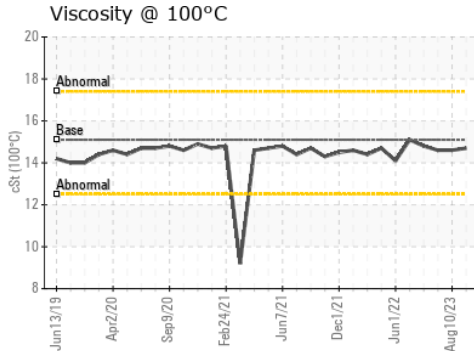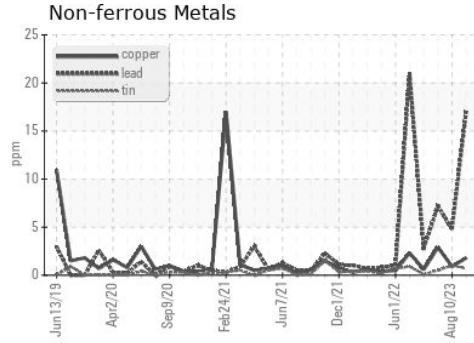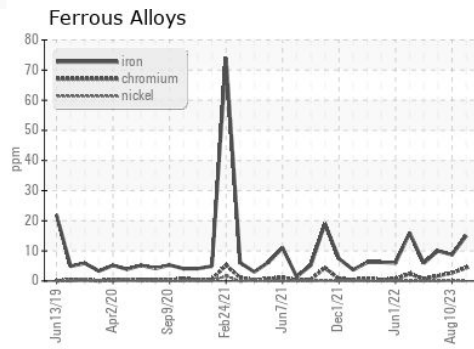

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087467 **Received** : 11 Sep 2023
Lab Number : 05946881 **Diagnosed** : 13 Sep 2023
Unique Number : 10642840 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 331 - Columbus
 180 Ada Moore Rd
 Columbus, NC
 US 28722
 Contact: Matt Segars
 matt.segars@gflenv.com
 T: (800)207-6618
 F: (252)617-2494

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)