


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

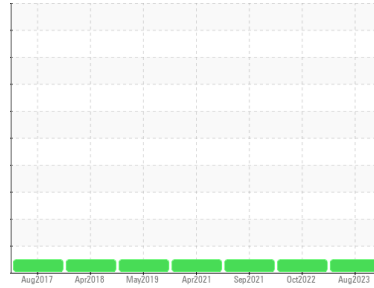

Machine Id  
**JOHN DEERE 500-190**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (7 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0089573</b>	PCA0070801	PCA0042149
Sample Date	Client Info	<b>21 Aug 2023</b>	17 Oct 2022	30 Sep 2021
Machine Age	hrs	<b>4177</b>	3600	3126
Oil Age	hrs	<b>473</b>	500	500
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>9</b>	13	11
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	4
Silver	ppm ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>5</b>	5	4
Lead	ppm ASTM D5185m >40	<b>2</b>	2	2
Copper	ppm ASTM D5185m >330	<b>1</b>	1	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	1
Antimony	ppm ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	<1

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>7</b>	5	16
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>54</b>	57	52
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>918</b>	900	894
Calcium	ppm ASTM D5185m 1070	<b>1294</b>	1048	1104
Phosphorus	ppm ASTM D5185m 1150	<b>1056</b>	959	997
Zinc	ppm ASTM D5185m 1270	<b>1333</b>	1157	1243
Sulfur	ppm ASTM D5185m 2060	<b>3845</b>	3374	2696

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	3
Sodium	ppm ASTM D5185m	<b>1</b>	2	5
Potassium	ppm ASTM D5185m >20	<b>3</b>	2	8



### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.9</b>	1.4	1.1
Nitration	Abs/cm *ASTM D7624 >20	<b>7.9</b>	9.2	8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.7</b>	22.4	20.3

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>12.8</b>	16.2	14.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.8</b>	10.3	---









# OIL ANALYSIS REPORT

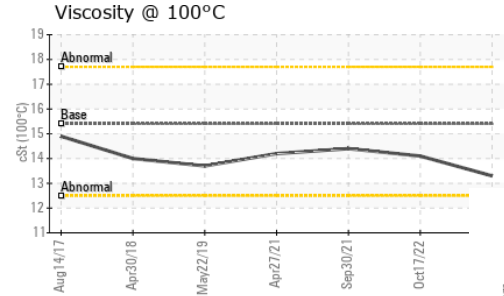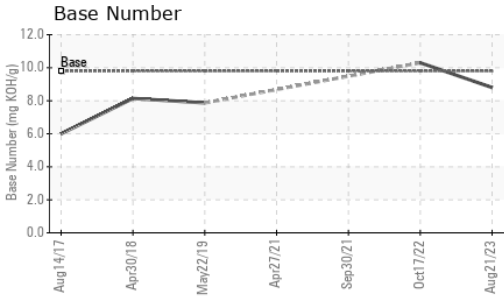

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	14.1	14.4

## GRAPHS

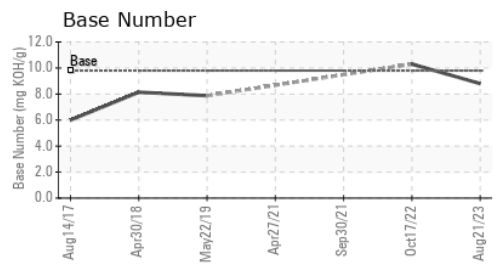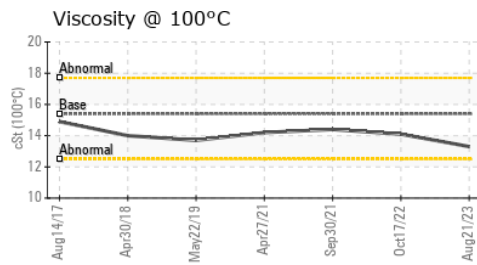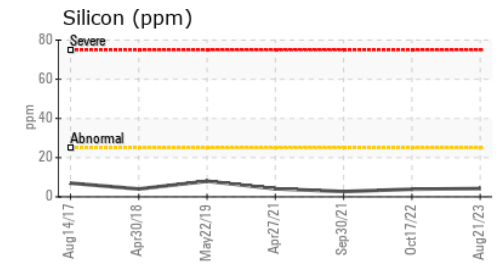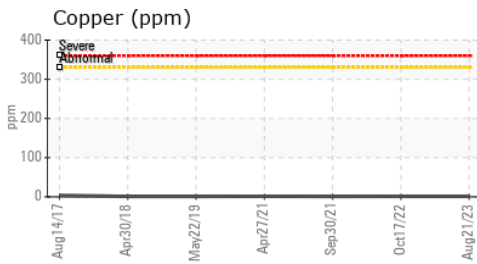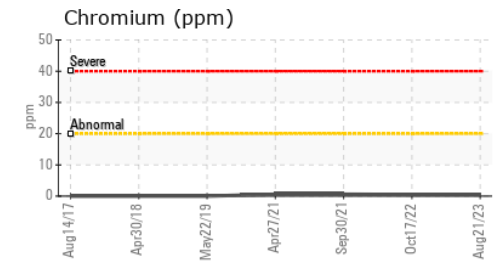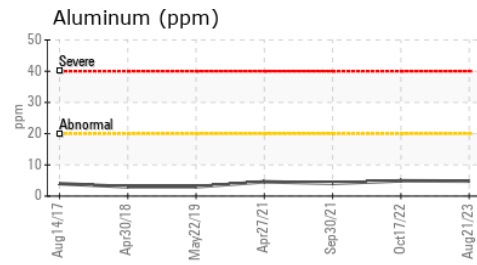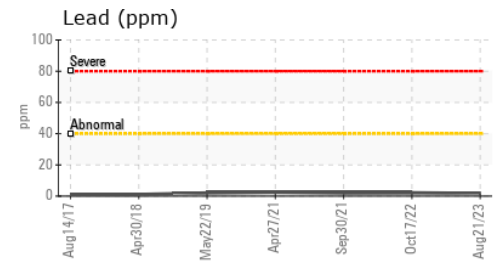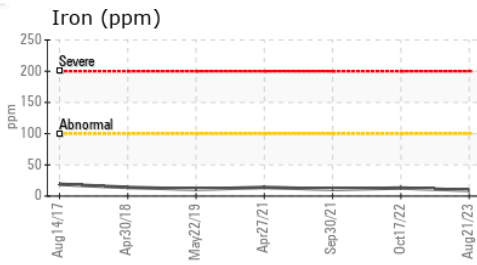

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089573 **Received** : 11 Sep 2023  
**Lab Number** : 05946922 **Diagnosed** : 12 Sep 2023  
**Unique Number** : 10642881 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**GE MARSHALL EXCAVATION**  
 1351 JOLIET RD  
 VALPARAISO, IN  
 US 46385  
 Contact: MARK STEFFEL  
 mark.steffel@gemarshall.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)