




Machine Id  
**JOHN DEERE 500-199**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (5 GAL)**

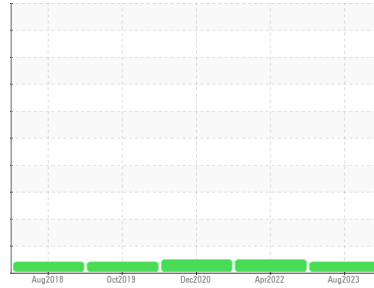

**DIAGNOSIS**

**Recommendation**  
 Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 Fuel content negligible. There is no indication of any contamination in the oil.

**Fluid Condition**  
 The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0089578</b>	PCA0057441	PCA0027467
Sample Date	Client Info			<b>11 Aug 2023</b>	15 Apr 2022	29 Dec 2020
Machine Age	hrs	Client Info		<b>2507</b>	1970	1596
Oil Age	hrs	Client Info		<b>507</b>	470	600
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>ATTENTION</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>9</b>	4	7
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	3	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	0
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	<1
Copper	ppm	ASTM D5185m	>330	<b>3</b>	2	4
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>9</b>	9	9
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>55</b>	53	60
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>916</b>	884	946
Calcium	ppm	ASTM D5185m	1070	<b>1370</b>	1034	1124
Phosphorus	ppm	ASTM D5185m	1150	<b>1091</b>	960	1062
Zinc	ppm	ASTM D5185m	1270	<b>1352</b>	1124	1151
Sulfur	ppm	ASTM D5185m	2060	<b>3992</b>	2574	2650
Lithium	ppm	ASTM D5185m		<b>---</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	2
Sodium	ppm	ASTM D5185m		<b>2</b>	1	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	<1
Fuel	%	ASTM D3524	>5	<b>1.1</b>	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.9</b>	6.5	6.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.2</b>	19.0	19

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.4</b>	14.4	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.0</b>	10.3	---









# OIL ANALYSIS REPORT

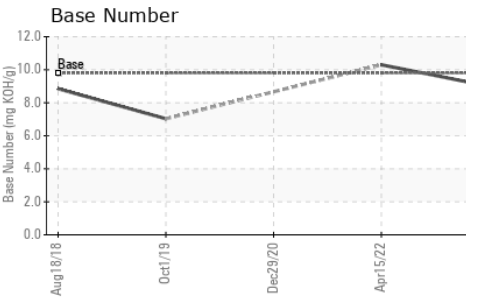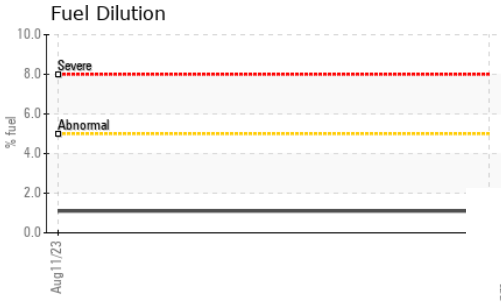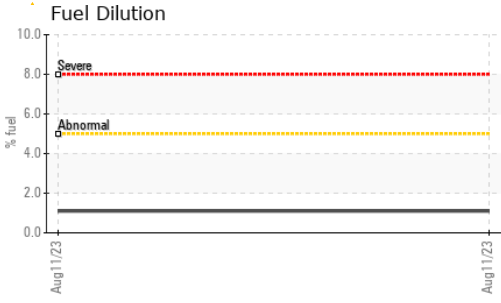

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.0	12.8	12.7

## GRAPHS

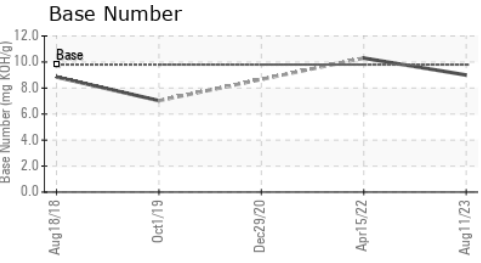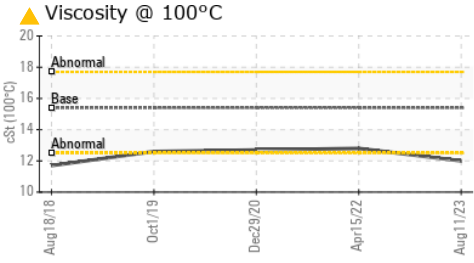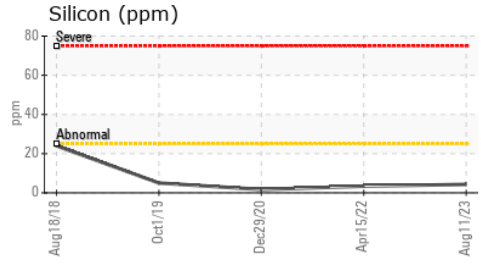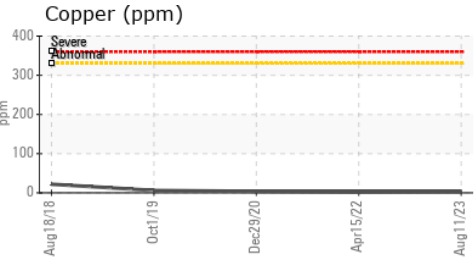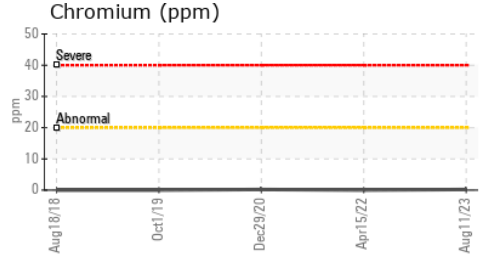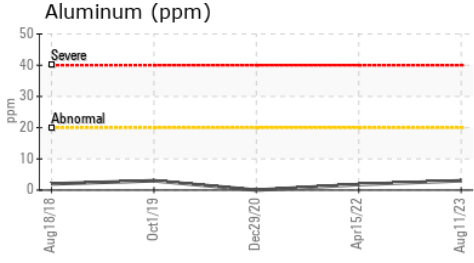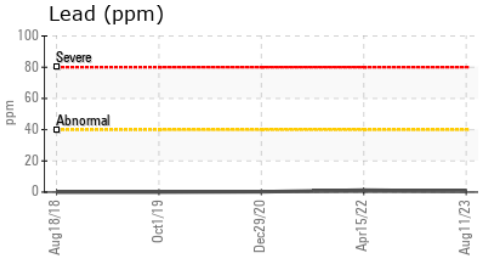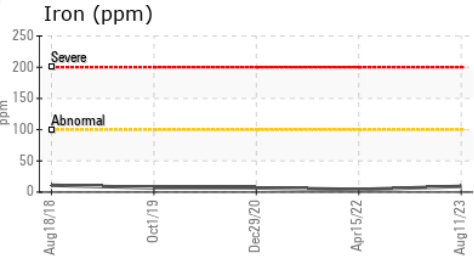

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089578 **Received** : 11 Sep 2023  
**Lab Number** : 05946923 **Diagnosed** : 13 Sep 2023  
**Unique Number** : 10642882 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel, TBN )

**GE MARSHALL EXCAVATION**  
 1351 JOLIET RD  
 VALPARAISO, IN  
 US 46385  
 Contact: MARK STEFFEL  
 mark.steffel@gemarshall.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)