


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR 740 OFF ROAD TRUCK 190-148**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

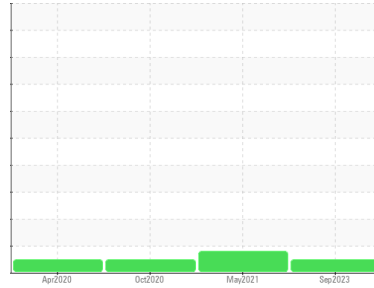

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0089579</b>	PCA0050388	PCA0027479
Sample Date	Client Info		<b>02 Sep 2023</b>	18 May 2021	21 Oct 2020
Machine Age	hrs	Client Info	<b>0</b>	13200	11495
Oil Age	hrs	Client Info	<b>407</b>	350	350
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >86	<b>18</b>	23	30
Chromium	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>2</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >15	<b>1</b>	0	2
Lead	ppm	ASTM D5185m >16	<b>2</b>	1	0
Copper	ppm	ASTM D5185m >250	<b>68</b>	▲ 238	22
Tin	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	11	31
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	52	22
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>949</b>	799	383
Calcium	ppm	ASTM D5185m 1070	<b>1137</b>	1193	1952
Phosphorus	ppm	ASTM D5185m 1150	<b>1055</b>	974	869
Zinc	ppm	ASTM D5185m 1270	<b>1330</b>	1123	1145
Sulfur	ppm	ASTM D5185m 2060	<b>3863</b>	2593	2865

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>3</b>	3	5
Sodium	ppm	ASTM D5185m	<b>3</b>	6	6
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	6



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.6	1.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	8.8	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.5</b>	21.4	23.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	16.2	16.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.2</b>	---	---









# OIL ANALYSIS REPORT

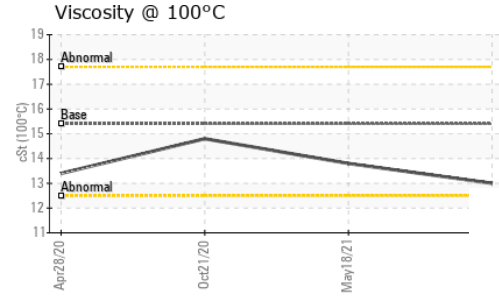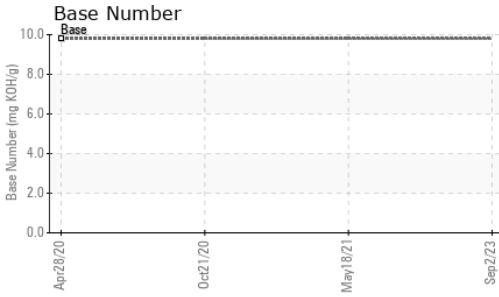

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	13.8	14.8

### GRAPHS

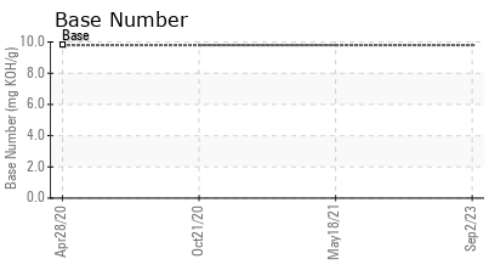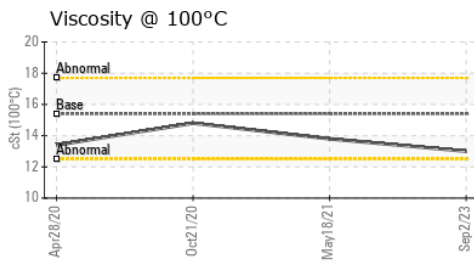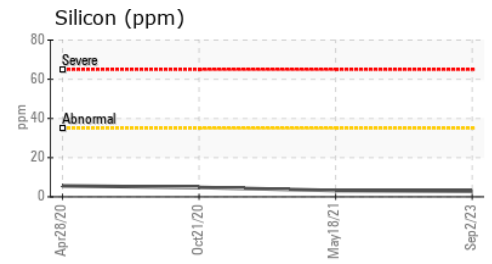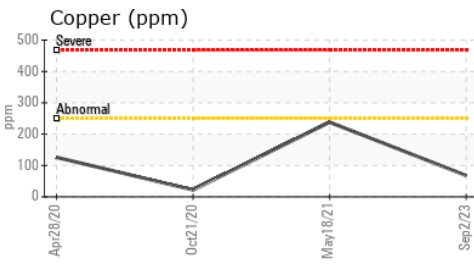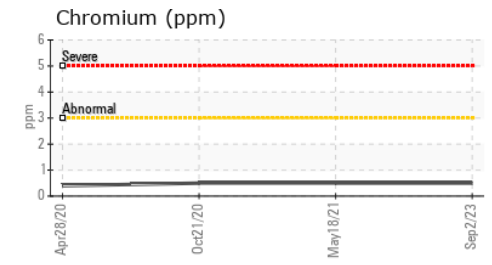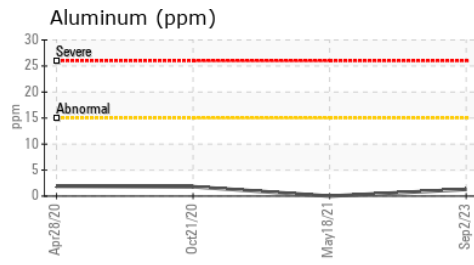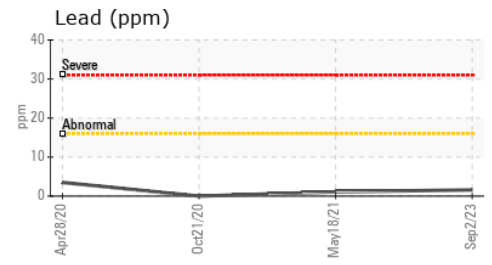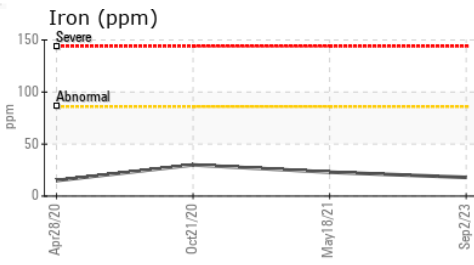

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0089579 **Received** : 11 Sep 2023  
**Lab Number** : 05946925 **Diagnosed** : 12 Sep 2023  
**Unique Number** : 10642884 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**GE MARSHALL EXCAVATION**  
 1351 JOLIET RD  
 VALPARAISO, IN  
 US 46385  
 Contact: MARK STEFFEL  
 mark.steffel@gemarshall.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)