




# PROBLEM SUMMARY

Sample Rating Trend

VISCOSITY



Machine Id  
**414051 MACK GR64BR**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (48 QTS)**

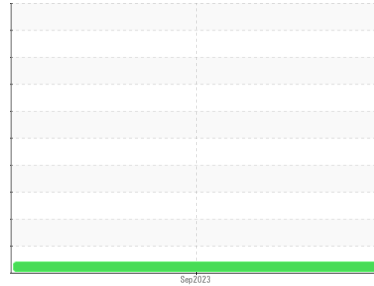

## COMPONENT CONDITION SUMMARY

### ▲ Viscosity @ 100°C



## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Visc @ 100°C	cSt	ASTM D445	15.1	▲ 10.3	---	---

Customer Id: GFL001  
 Sample No.: GFL0089290  
 Lab Number: 05946929  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

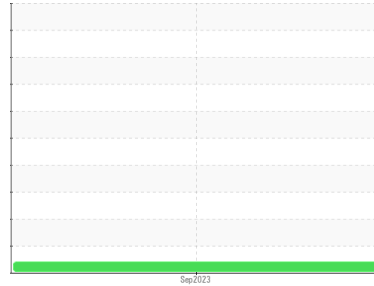

Machine Id  
**414051 MACK GR64BR**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (48 QTS)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0089290</b>	---	---
Sample Date	Client Info		<b>08 Sep 2023</b>	---	---
Machine Age	hrs	Client Info	<b>585</b>	---	---
Oil Age	hrs	Client Info	<b>585</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>22</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>1</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>11</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >150	<b>215</b>	---	---
Tin	ppm	ASTM D5185m >4	<b>3</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>160</b>	---	---
Barium	ppm	ASTM D5185m 5	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 50	<b>111</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m 560	<b>803</b>	---	---
Calcium	ppm	ASTM D5185m 1510	<b>1474</b>	---	---
Phosphorus	ppm	ASTM D5185m 780	<b>754</b>	---	---
Zinc	ppm	ASTM D5185m 870	<b>948</b>	---	---
Sulfur	ppm	ASTM D5185m 2040	<b>3076</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>61</b>	---	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>23</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.2</b>	---	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.1</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>7.9</b>	---	---




# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

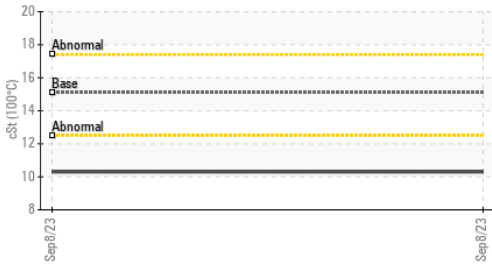

Base Number

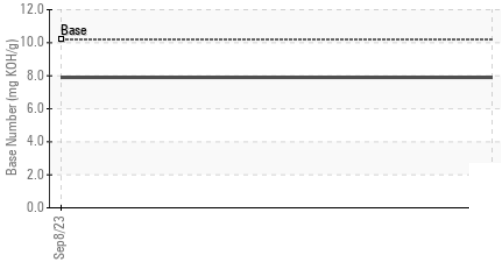

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	▲ 10.3	---	---

## GRAPHS


Ferrous Alloys




Non-ferrous Metals

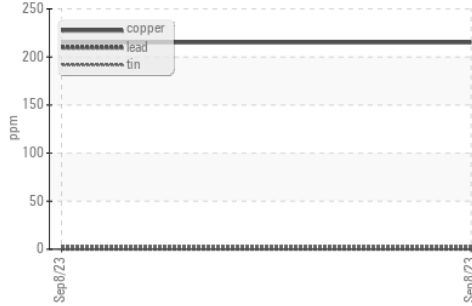

▲ Viscosity @ 100°C

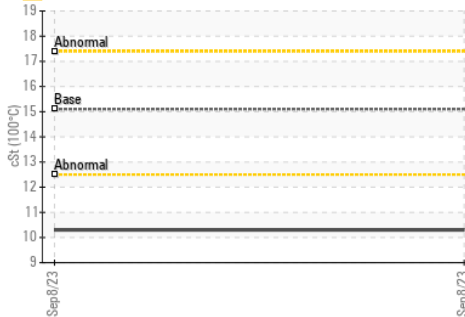

Base Number

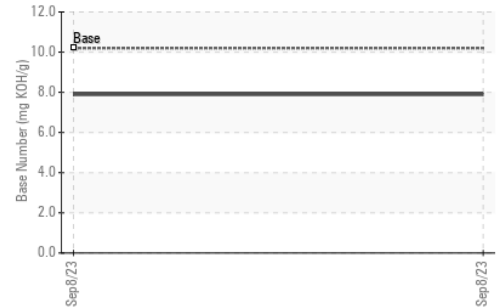

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0089290 **Received** : 11 Sep 2023  
**Lab Number** : 05946929 **Diagnosed** : 13 Sep 2023  
**Unique Number** : 10642888 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: PERCENTFUEL )

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)