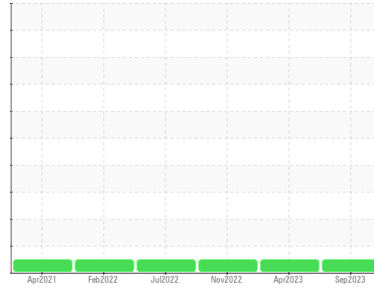


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Machine Id

**T311**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 10W30 (--- GAL)**
**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0104160</b>	PCA0095694	PCA0085017
Sample Date	Client Info		<b>05 Sep 2023</b>	27 Apr 2023	30 Nov 2022
Machine Age	mls	Client Info	<b>226825</b>	6915	5179
Oil Age	mls	Client Info	<b>226825</b>	5179	5179
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION**

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>23</b>	29	34
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	5	6
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>2</b>	3	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>6</b>	4	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>51</b>	63	51
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>949</b>	990	901
Calcium	ppm	ASTM D5185m 1050	<b>1244</b>	1158	1319
Phosphorus	ppm	ASTM D5185m 995	<b>983</b>	1036	919
Zinc	ppm	ASTM D5185m 1180	<b>1278</b>	1293	1187
Sulfur	ppm	ASTM D5185m 2600	<b>3602</b>	3262	3157

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	10	13
Sodium	ppm	ASTM D5185m	<b>1</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>6</b>	2	4



**INFRA-RED**

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	1	1.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	9.9	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.9</b>	21.2	25.6

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	17.7	20.7
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.8</b>	4.8	6.7





# OIL ANALYSIS REPORT

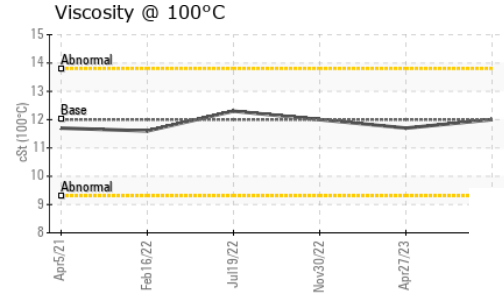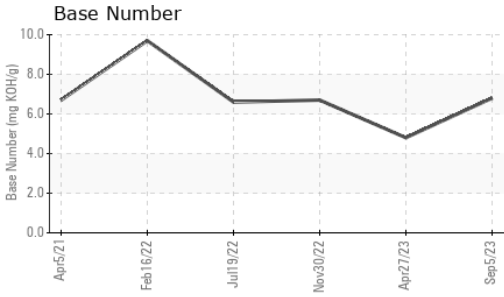

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.0</b>	11.7	12.0

## GRAPHS

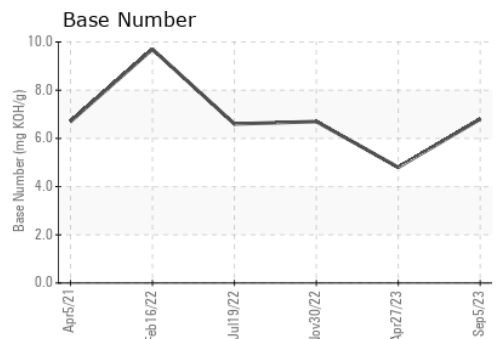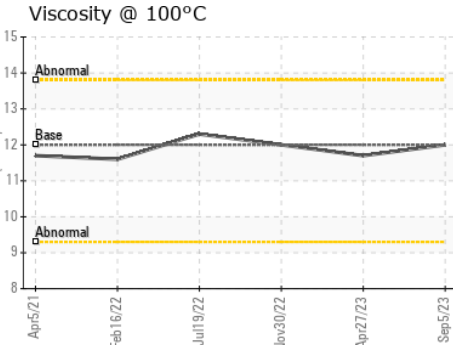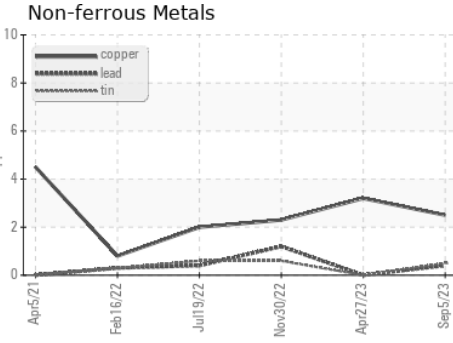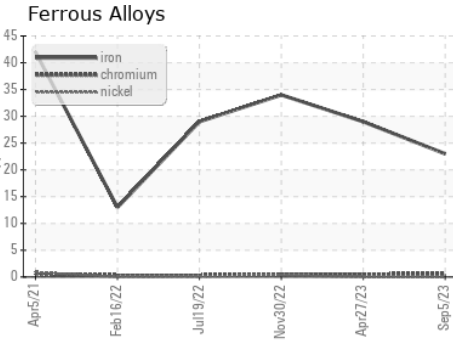

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104160 **Received** : 11 Sep 2023  
**Lab Number** : **05946944** **Diagnosed** : 12 Sep 2023  
**Unique Number** : 10642903 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**NW WHITE & CO - COLUMBIA DIVISION**  
 100 INDEPENDENCE BLVD  
 COLUMBIA, SC  
 US 29210  
 Contact: GEORGE EDWARDS  
 gedwards@nwwhite.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)