




# PROBLEM SUMMARY

Sample Rating Trend

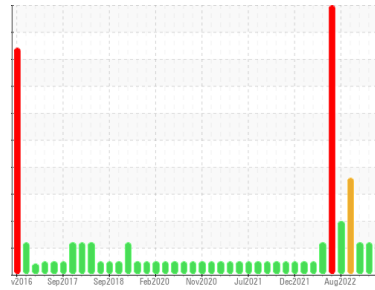


GLYCOL



Machine Id  
**3719**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

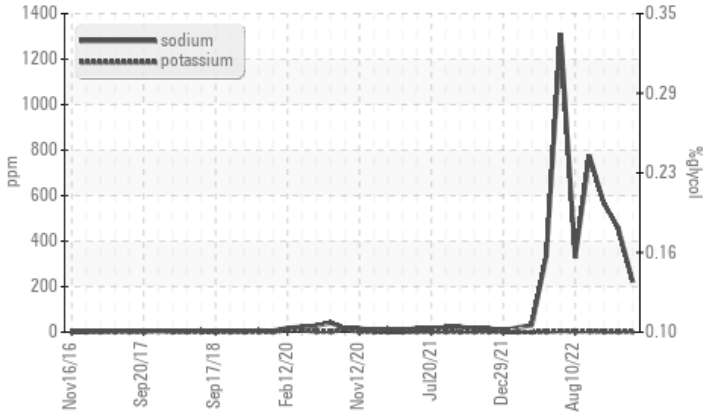

## RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	ABNORMAL	ABNORMAL
Sodium	ppm	ASTM D5185m	▲ 221	▲ 458	▲ 565

Customer Id: GFL029  
 Sample No.: GFL0093767  
 Lab Number: 05947841  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

## HISTORICAL DIAGNOSIS

### 22 Aug 2023 Diag: Jonathan Hester

#### GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels remain high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



### 03 Jul 2023 Diag: Jonathan Hester

#### GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels remain high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



### 28 Feb 2023 Diag: Jonathan Hester

#### DIRT



We advise that you check for possible coolant leak. Check for low coolant level. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The BN result indicates that there is suitable alkalinity remaining in the oil.


[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

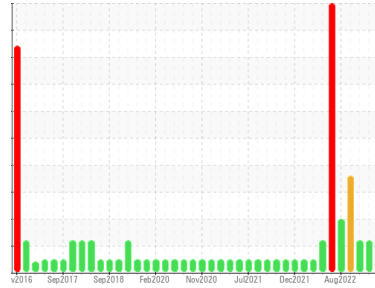

GLYCOL



Machine Id  
**3719**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain high. Test for glycol is negative.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0093767</b>	GFL0079018	GFL0079025
Sample Date	Client Info		<b>07 Sep 2023</b>	22 Aug 2023	03 Jul 2023
Machine Age	hrs	Client Info	<b>0</b>	38896	236884
Oil Age	hrs	Client Info	<b>0</b>	38896	236884
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Changed
Sample Status			<b>ATTENTION</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>7</b>	19	26
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>&lt;1</b>	5	3
Lead	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	4	6
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>15</b>	21	26
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	74	73
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>878</b>	986	833
Calcium	ppm	ASTM D5185m 1070	<b>999</b>	1084	1057
Phosphorus	ppm	ASTM D5185m 1150	<b>999</b>	1095	993
Zinc	ppm	ASTM D5185m 1270	<b>1190</b>	1334	1186
Sulfur	ppm	ASTM D5185m 2060	<b>3472</b>	3796	3208

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	15	19
Sodium	ppm	ASTM D5185m	<b>▲ 221</b>	<b>▲ 458</b>	<b>▲ 565</b>
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	10.2	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.1</b>	19.8	18.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.4</b>	15.6	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.3</b>	10.0	12.3







# OIL ANALYSIS REPORT

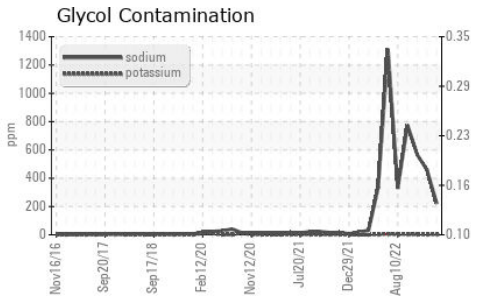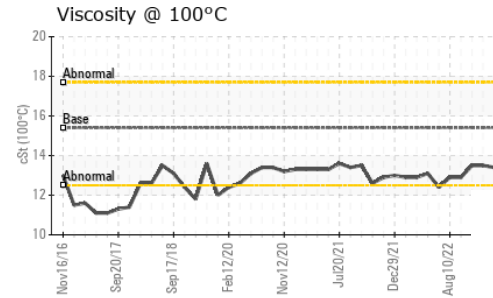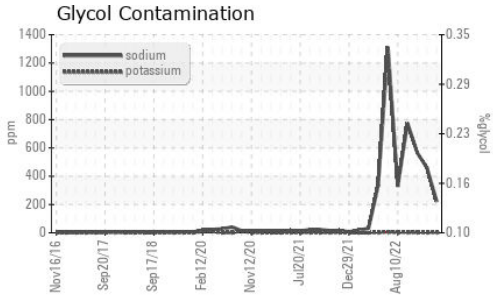

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	13.5

## GRAPHS

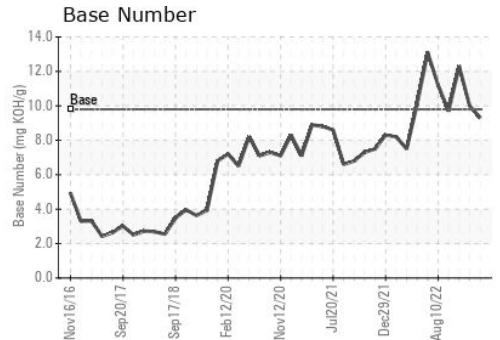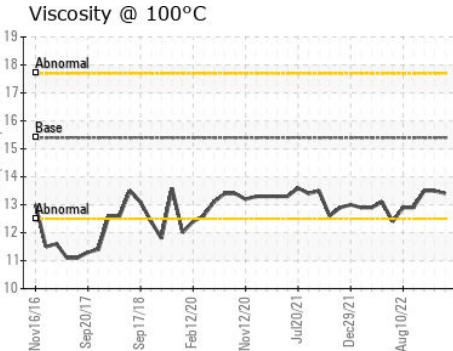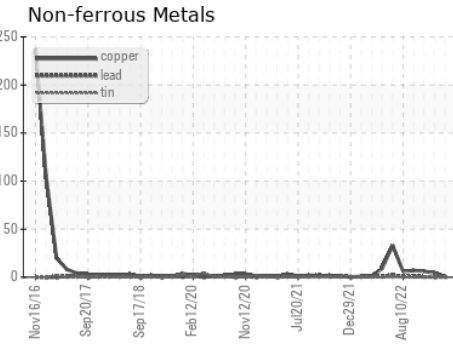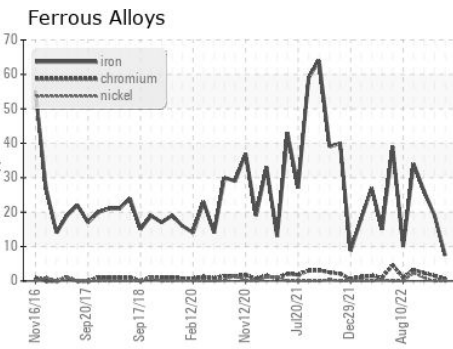

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0093767  
 Lab Number : 05947841  
 Unique Number : 10643800  
 Test Package : FLEET ( Additional Tests: Glycol )

GFL Environmental - 029 - Wytheville  
 2390 North 4th Street  
 Wytheville, VA  
 US 24382  
 Contact: CHARLES CORVIN  
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com  
 T: (276)223-4476  
 F: (276)223-1283

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)