


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

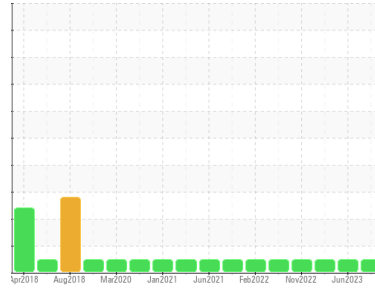

Area  
**FLEET**  
Machine Id  
**VOLVO VNR 26617**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0102840</b>	PCA0095995	PCA0089356
Sample Date	Client Info			<b>05 Sep 2023</b>	08 Jun 2023	23 Feb 2023
Machine Age	mls Client Info			<b>522730</b>	503566	498960
Oil Age	mls Client Info			<b>44020</b>	24856	41816
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>35</b>	21	48
Chromium	ppm	ASTM D5185m	>6	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	3
Lead	ppm	ASTM D5185m	>95	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185m	>85	<b>4</b>	4	5
Tin	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>&lt;1</b>	2	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>55</b>	59	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>959</b>	980	939
Calcium	ppm	ASTM D5185m	1050	<b>1071</b>	1126	1106
Phosphorus	ppm	ASTM D5185m	995	<b>996</b>	1018	975
Zinc	ppm	ASTM D5185m	1180	<b>1261</b>	1314	1240
Sulfur	ppm	ASTM D5185m	2600	<b>2998</b>	3684	3070

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	6
Sodium	ppm	ASTM D5185m		<b>14</b>	2	19
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.6</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.6</b>	10.1	11.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.2</b>	22.0	24.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.6</b>	19.3	21.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.6</b>	5.6	4.5






# OIL ANALYSIS REPORT

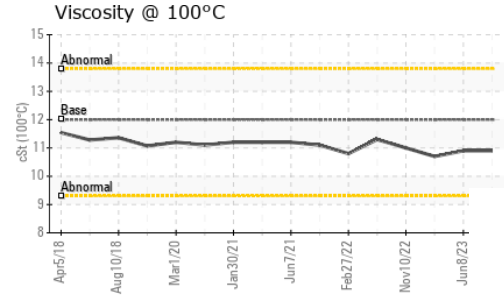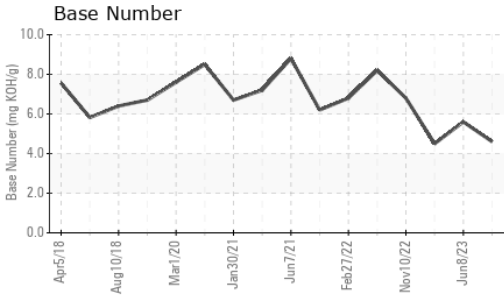

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	10.9	10.7

## GRAPHS

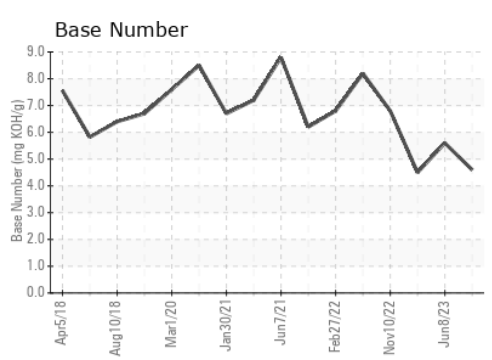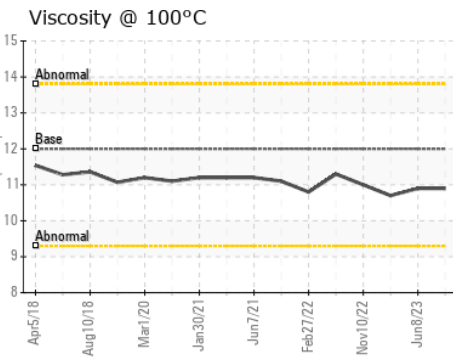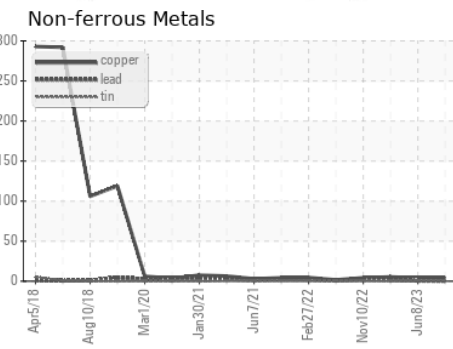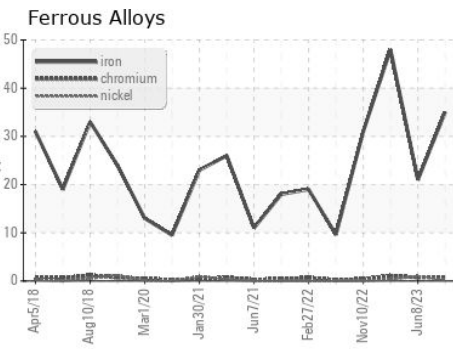

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102840 **Received** : 12 Sep 2023  
**Lab Number** : **05948819** **Diagnosed** : 14 Sep 2023  
**Unique Number** : 10644778 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)