


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Machine Id  
**DT800**  
 Component  
**Transmission (Auto)**  
 Fluid  
**COGNIS EMGARD 2805 ATF (--- GAL)**

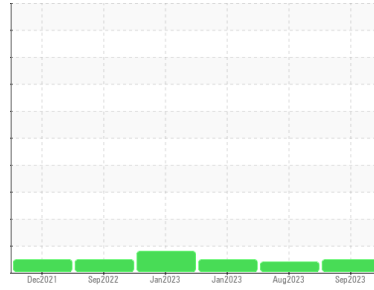

## DIAGNOSIS

- Recommendation**  
 Resample at the next service interval to monitor.
- Wear**  
 All component wear rates are normal.
- Contamination**  
 There is no indication of any contamination in the fluid.
- Fluid Condition**  
 The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0104131</b>	PCA0102276	PCA0090279	
Sample Date	Client Info	<b>09 Sep 2023</b>	16 Aug 2023	28 Jan 2023	
Machine Age	mls	Client Info	<b>156267</b>	152234	157053
Oil Age	mls	Client Info	<b>4819</b>	157053	157053
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	N/A	
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL	

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >160	<b>56</b>	69	45
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>32</b>	45	26
Lead	ppm	ASTM D5185m >50	<b>16</b>	18	14
Copper	ppm	ASTM D5185m >225	<b>28</b>	36	21
Tin	ppm	ASTM D5185m >10	<b>4</b>	4	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>79</b>	74	85
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Calcium	ppm	ASTM D5185m	<b>119</b>	106	107
Phosphorus	ppm	ASTM D5185m	<b>237</b>	224	236
Zinc	ppm	ASTM D5185m	<b>0</b>	0	7
Sulfur	ppm	ASTM D5185m	<b>1866</b>	1686	1440

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<b>5</b>	6	5
Sodium	ppm	ASTM D5185m	<b>6</b>	6	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	1


## VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	▲ MODER	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES




method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445 38.9	<b>32.3</b>	32.0	32.5

# OIL ANALYSIS REPORT

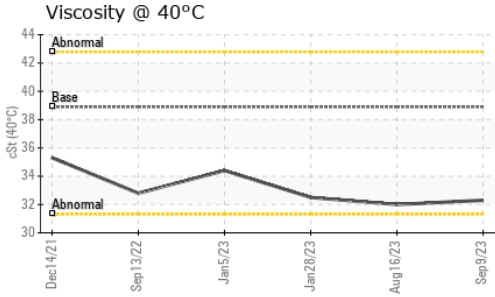

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

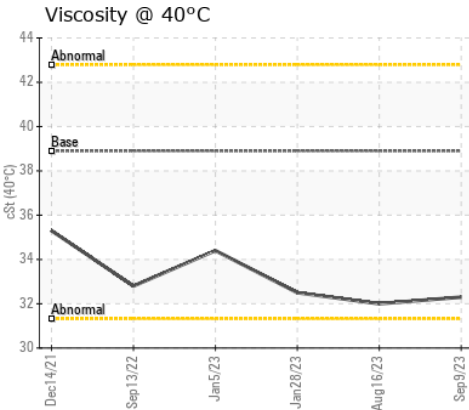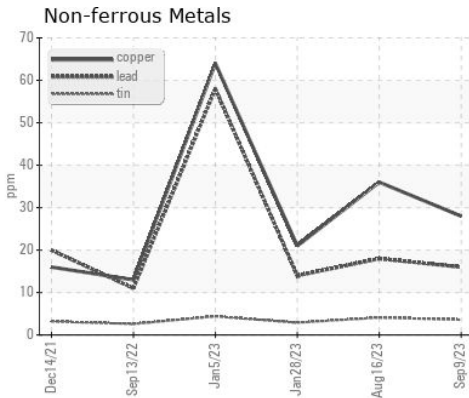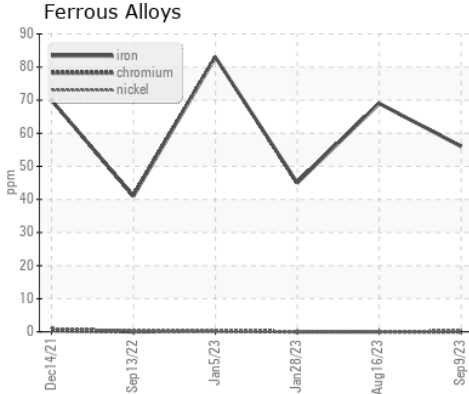

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104131 **Received** : 12 Sep 2023  
**Lab Number** : 05949707 **Diagnosed** : 15 Sep 2023  
**Unique Number** : 10645666 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**NW WHITE & CO - COLUMBIA DIVISION**  
 100 INDEPENDENCE BLVD  
 COLUMBIA, SC  
 US 29210  
 Contact: GEORGE EDWARDS  
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)