


# **PROBLEM SUMMARY**

#### Area (15581Z) Walgreens Machine Id [Walgreens] 136A61385 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

## COMPONENT CONDITION SUMMARY

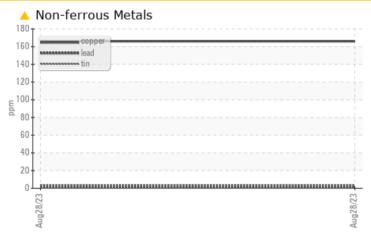

REC	OMN	<b>IEND</b>	ATI	ON
1120	<b>O</b> 10110			0.4

Resample at the next service interval to monitor.

PROBLEMATIC	C TEST	RESULT	S		
Sample Status				ABNORMAL	 
Copper	ppm	ASTM D5185m	>150	<b>166</b>	 


Customer Id: TSV1372 Sample No.: PCA0093992 Lab Number: 05949799 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

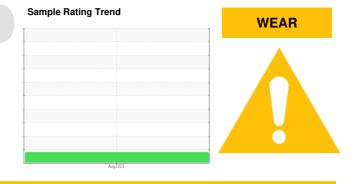

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

#### Area (15581Z) Walgreens Machine Id [Walgreens] 136A61385 Component

**Diesel Engine** 

Fluid PETRO CANADA DURON SHP 10W30 (11 GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### 🔺 Wear

The copper level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

				Aug2023		
SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0093992		
Sample Date		Client Info		28 Aug 2023		
Machine Age	mls	Client Info		364125		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	ON	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
WEAR METALS	6	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	54		
Chromium	ppm	ASTM D5185m	>5	3		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	29		
Lead	ppm	ASTM D5185m	>30	1		
Copper	ppm	ASTM D5185m	>150	<u> </u>		
Tin	ppm	ASTM D5185m	>5	3		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
			initity base	ourient	Thistory I	Thotory E
Boron	ppm	ASTM D5185m	2	45		
	ppm ppm					
Barium		ASTM D5185m	2	45		
Barium Molybdenum	ppm	ASTM D5185m ASTM D5185m	2 0	45 0		
Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	45 0 43		
Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0	45 0 43 4		
Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950	45 0 43 4 545		  
Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	45 0 43 4 545 1843	  	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	45 0 43 4 545 1843 716	   	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180	45 0 43 4 545 1843 716 876	   	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	45 0 43 4 545 1843 716 876 2398		
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	45 0 43 4 545 1843 716 876 2398 current	     history1	     history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	2 0 50 950 1050 995 1180 2600 limit/base >20	45 0 43 4 545 1843 716 876 2398 current 8	     history1	    history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon Sodium	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 limit/base >20	45 0 43 545 1843 716 876 2398 current 8 5	      history 1	     history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon Sodium Potassium INFRA-RED	ppm	ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 limit/base >20	45 0 43 4 545 1843 716 876 2398 current 8 5 92	     history1  	     history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon Sodium Potassium INFRA-RED Soot %	ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >20 limit/base >3	45 0 43 545 1843 716 876 2398 current 8 5 92 current	     history1   history1	    history2   history2
CONTAMINANT Silicon Sodium Potassium	ppm   ppm   ppm   ppm   ppm   ppm   ppm   ppm   ppm   ppm   ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >20 limit/base >3	45 0 43 545 1843 716 876 2398 current 8 5 92 current 0.3	     history1   history1	    history2  history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >20 limit/base >3 >20	45 0 43 4 545 1843 716 876 2398 current 8 5 92 current 0.3 7.9	      history1   history1  	     history2  history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANT Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>imit/base</b> >20 <b>imit/base</b> >3 >20 >3 >20	45 0 43 4 545 1843 716 876 2398 current 8 5 92 current 0.3 7.9 22.5	      history1  history1  history1	     history2  history2

**WEAR** 



🔺 Non-ferrous Metals

# **OIL ANALYSIS REPORT**

method


limit/base

current

history1

history2

VISUAL

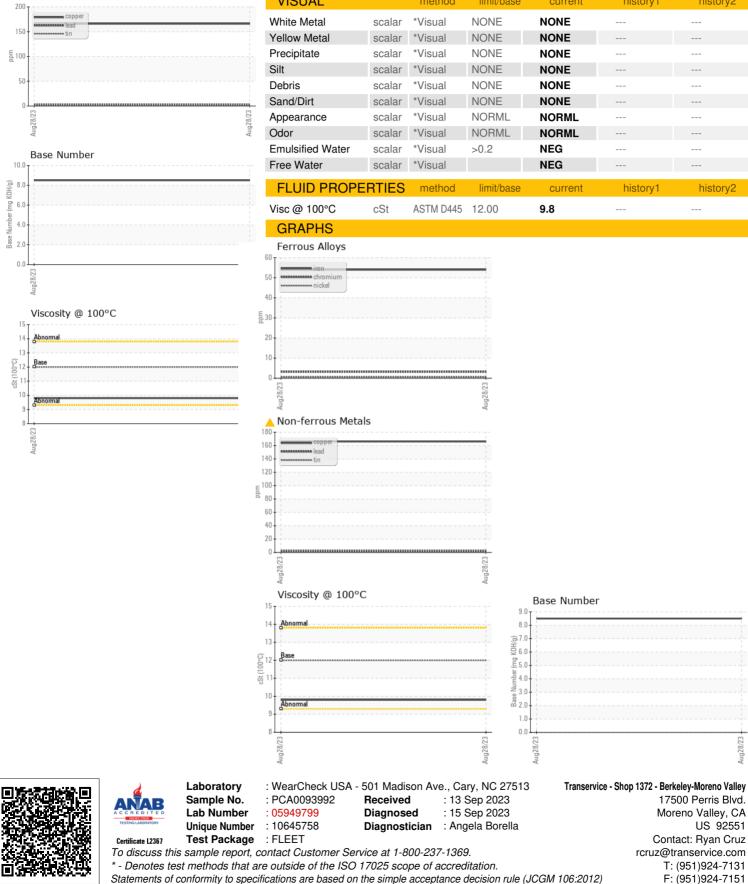

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)