


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

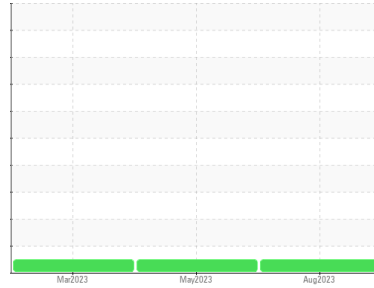

Area  
**(51467Z) Walgreens**  
 Machine Id  
**[Walgreens] 136A63392**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0093997</b>	PCA0093874	PCA0093912
Sample Date	Client Info		<b>29 Aug 2023</b>	15 May 2023	06 Mar 2023
Machine Age	mls Client Info		<b>106014</b>	81660	50539
Oil Age	mls Client Info		<b>50539</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>80	<b>19</b>	32	58
Chromium	ppm ASTM D5185m	>5	<b>2</b>	3	4
Nickel	ppm ASTM D5185m	>2	<b>0</b>	<1	1
Titanium	ppm ASTM D5185m		<b>&lt;1</b>	3	1
Silver	ppm ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m	>30	<b>8</b>	29	49
Lead	ppm ASTM D5185m	>30	<b>0</b>	1	1
Copper	ppm ASTM D5185m	>150	<b>28</b>	36	112
Tin	ppm ASTM D5185m	>5	<b>&lt;1</b>	2	4
Vanadium	ppm ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	2	<b>4</b>	14	28
Barium	ppm ASTM D5185m	0	<b>0</b>	5	0
Molybdenum	ppm ASTM D5185m	50	<b>64</b>	57	48
Manganese	ppm ASTM D5185m	0	<b>&lt;1</b>	3	6
Magnesium	ppm ASTM D5185m	950	<b>1048</b>	925	653
Calcium	ppm ASTM D5185m	1050	<b>1254</b>	1414	1734
Phosphorus	ppm ASTM D5185m	995	<b>1026</b>	963	757
Zinc	ppm ASTM D5185m	1180	<b>1309</b>	1215	999
Sulfur	ppm ASTM D5185m	2600	<b>3092</b>	2704	2033

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>20	<b>4</b>	5	8
Sodium	ppm ASTM D5185m		<b>1</b>	3	5
Potassium	ppm ASTM D5185m	>20	<b>22</b>	63	127



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	<b>0.6</b>	0.6	0.6
Nitration	Abs/cm *ASTM D7624	>20	<b>8.0</b>	9.4	11.7
Sulfation	Abs/.1mm *ASTM D7415	>30	<b>19.9</b>	21.8	24.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>16.7</b>	19.8	25.9
Base Number (BN)	mg KOH/g ASTM D2896		<b>7.5</b>	7.7	6.8





# OIL ANALYSIS REPORT

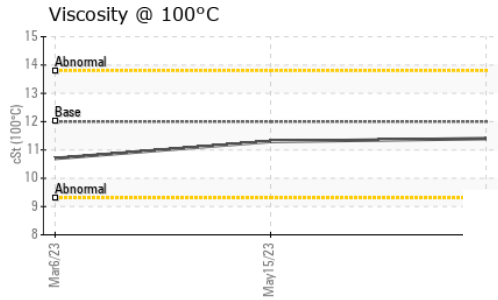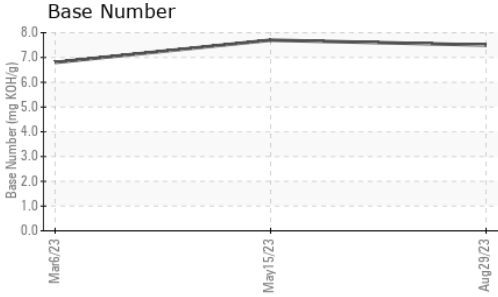

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.3	10.7

## GRAPHS

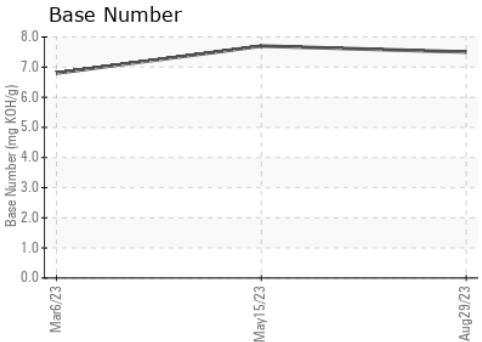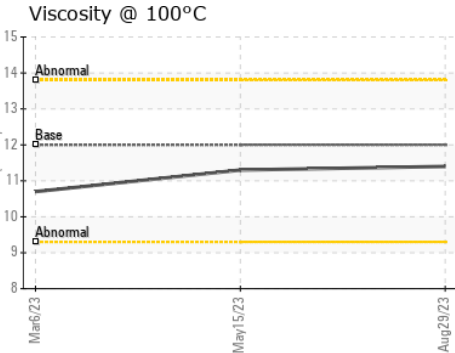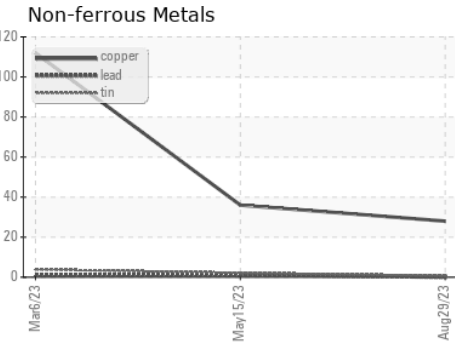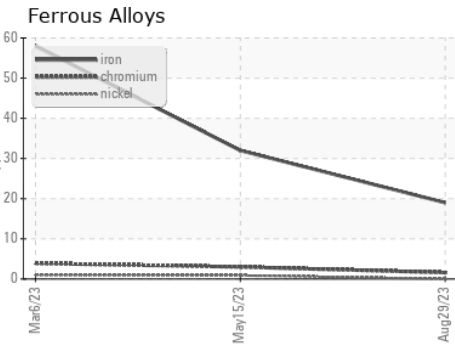

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093997 **Received** : 13 Sep 2023  
**Lab Number** : **05949803** **Diagnosed** : 15 Sep 2023  
**Unique Number** : 10645762 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551  
 Contact: Ryan Cruz  
 rcruz@transervice.com  
 T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)