




# OIL ANALYSIS REPORT

Sample Rating Trend

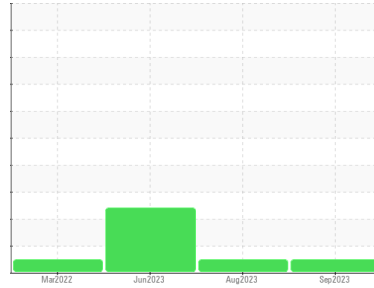

**NORMAL**



Machine Id

**29M**

Component

**Gasoline Engine**

Fluid

**GASOLINE ENGINE OIL SAE 5W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0086871</b>	GFL0072540	GFL0068301
Sample Date	Client Info		<b>08 Sep 2023</b>	30 Aug 2023	08 Jun 2023
Machine Age	mls	Client Info	<b>265994</b>	265994	0
Oil Age	mls	Client Info	<b>265994</b>	265994	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>28</b>	27	7
Chromium	ppm	ASTM D5185m >20	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	1	0
Titanium	ppm	ASTM D5185m	<b>4</b>	4	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>15</b>	19	<1
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >155	<b>4</b>	3	60
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 75	<b>25</b>	33	12
Barium	ppm	ASTM D5185m 5	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 100	<b>252</b>	243	79
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 12	<b>582</b>	609	924
Calcium	ppm	ASTM D5185m 2100	<b>1379</b>	1318	1084
Phosphorus	ppm	ASTM D5185m 650	<b>716</b>	724	1019
Zinc	ppm	ASTM D5185m 850	<b>867</b>	887	1224
Sulfur	ppm	ASTM D5185m 2500	<b>2523</b>	2553	3342

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>28</b>	25	10
Sodium	ppm	ASTM D5185m >400	<b>4</b>	3	▲ 524
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	▲ 28

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.7</b>	11.9	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.1</b>	23.3	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.3</b>	18.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>3.8</b>	4.1	---







# OIL ANALYSIS REPORT

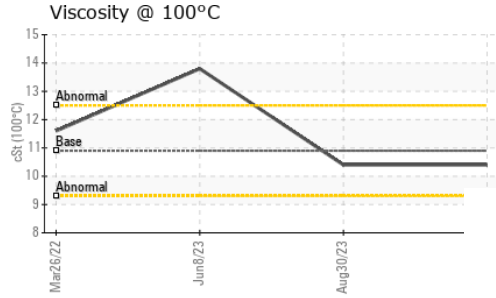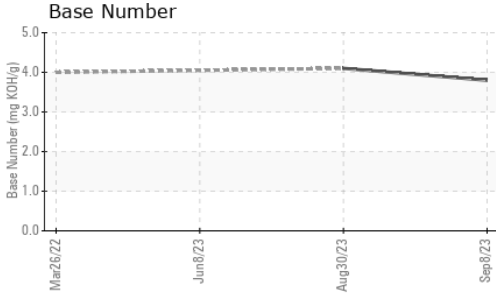

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>10.4</b>	10.4	13.8

## GRAPHS

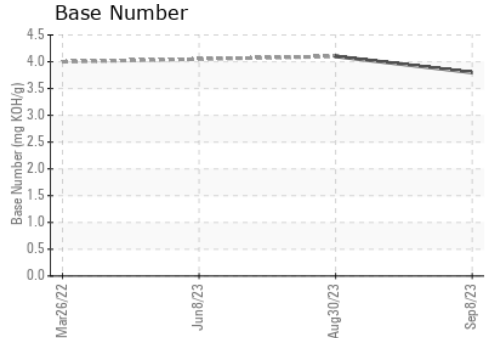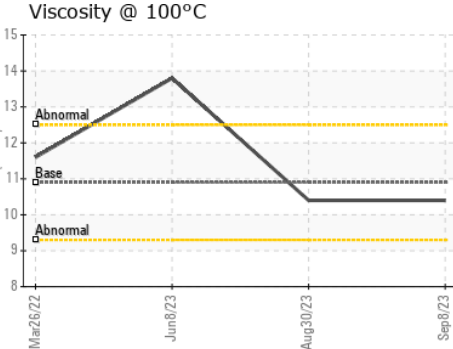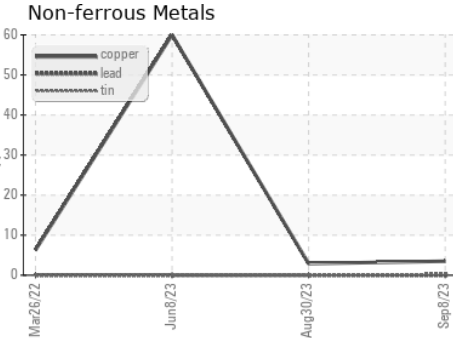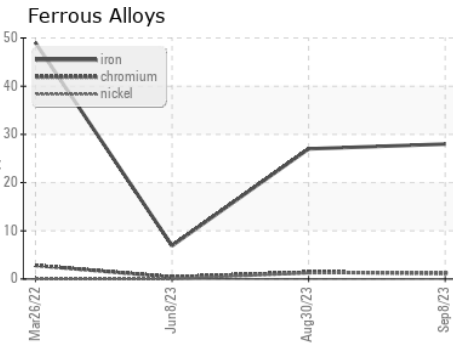

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086871 **Received** : 13 Sep 2023  
**Lab Number** : **05949838** **Diagnosed** : 18 Sep 2023  
**Unique Number** : 10645797 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 419 - Metro Saginaw**  
 6950 N Michigan  
 Saginaw, MI  
 US 48604  
 Contact: Jeremy Hines  
 jhines@gflenv.com  
 T: (800)684-1277  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)