




# OIL ANALYSIS REPORT

Sample Rating Trend

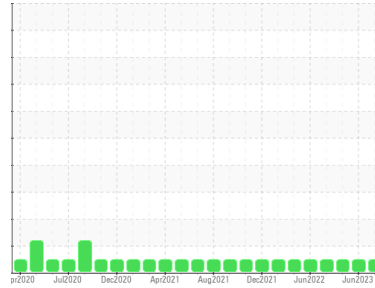

**NORMAL**



Machine Id  
**910000**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0061886</b>	GFL0061896	GFL0061873
Sample Date	Client Info	<b>12 Sep 2023</b>	30 Jun 2023	10 Apr 2023
Machine Age	hrs	<b>9300</b>	8920	8279
Oil Age	hrs	<b>9300</b>	8920	8279
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>7</b>	13	29
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	3	2
Nickel	ppm ASTM D5185m >4	<b>0</b>	1	0
Titanium	ppm ASTM D5185m	<b>0</b>	2	0
Silver	ppm ASTM D5185m >3	<b>0</b>	2	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	4	5
Lead	ppm ASTM D5185m >40	<b>0</b>	4	0
Copper	ppm ASTM D5185m >330	<b>0</b>	2	0
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	2	0
Vanadium	ppm ASTM D5185m	<b>0</b>	1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	2	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>7</b>	10	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	58	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	2	<1
Magnesium	ppm ASTM D5185m 1010	<b>1005</b>	970	901
Calcium	ppm ASTM D5185m 1070	<b>1151</b>	1123	1104
Phosphorus	ppm ASTM D5185m 1150	<b>1034</b>	1009	961
Zinc	ppm ASTM D5185m 1270	<b>1273</b>	1253	1228
Sulfur	ppm ASTM D5185m 2060	<b>3772</b>	3702	3013

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	3
Sodium	ppm ASTM D5185m	<b>3</b>	6	6
Potassium	ppm ASTM D5185m >20	<b>2</b>	8	10

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.8	1.4
Nitration	Abs/cm *ASTM D7624 >20	<b>6.5</b>	7.9	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.1</b>	19.9	22.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.2</b>	14.6	16.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.6</b>	9.0	7.6







# OIL ANALYSIS REPORT

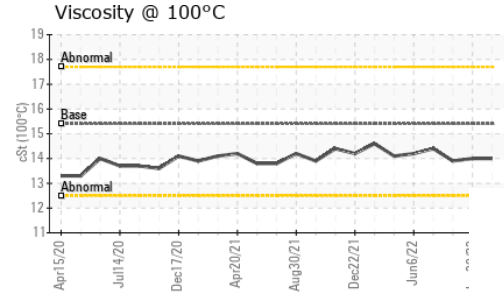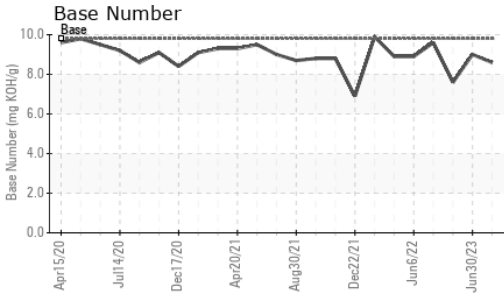

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.0	13.9

## GRAPHS

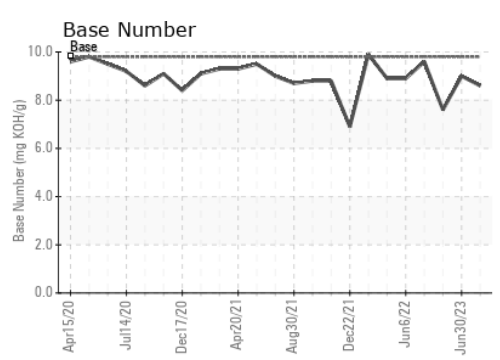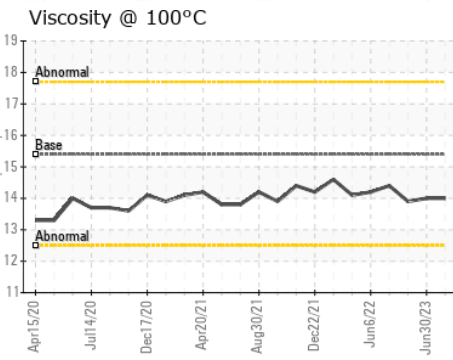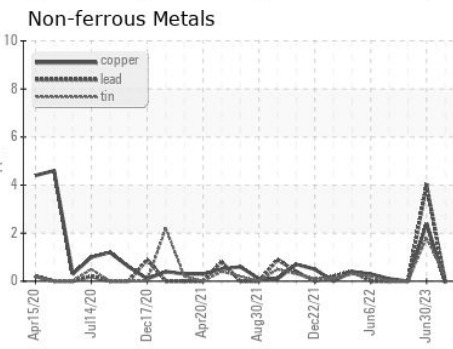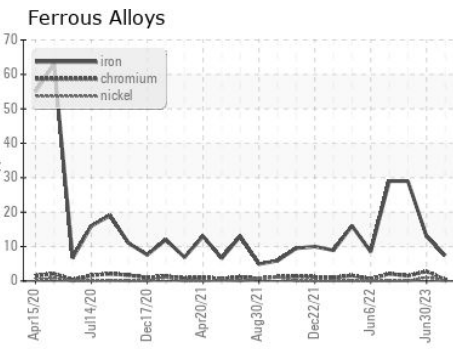

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0061886 **Received** : 13 Sep 2023  
**Lab Number** : **05949905** **Diagnosed** : 15 Sep 2023  
**Unique Number** : 10645864 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 044 - Elizabeth City**  
 657 Old US 17  
 Elizabeth City, NC  
 US 27909  
 Contact: TOM BAIRD  
 tom.baird@gflenv.com  
 T: (252)562-2645  
 F: (252)264-4411

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)