




# PROBLEM SUMMARY

Sample Rating Trend

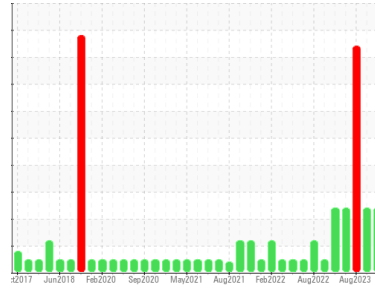


COOLANT



Machine Id  
**2667C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (12 GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

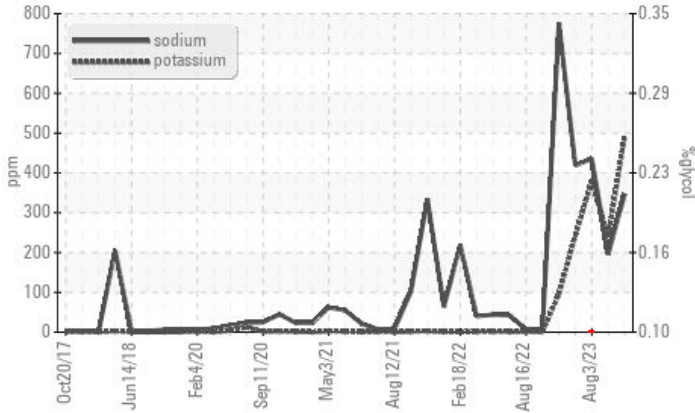

## RECOMMENDATION

We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	SEVERE
Sodium	ppm	ASTM D5185m	▲ 347	▲ 196	▲ 436
Potassium	ppm	ASTM D5185m >20	▲ 491	▲ 241	▲ 379

Customer Id: GFL017  
 Sample No.: GFL0079612  
 Lab Number: 05950001  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

### 08 Aug 2023 Diag: Jonathan Hester

#### COOLANT



We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



### 03 Aug 2023 Diag: Jonathan Hester

#### GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### 29 Jun 2023 Diag: Angela Borella

#### COOLANT



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.


[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

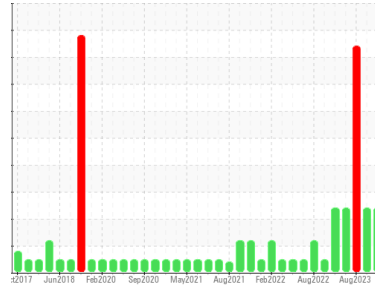

**COOLANT**



Machine Id  
**2667C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (12 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0079612</b>	GFL0079609	GFL0088559
Sample Date	Client Info		<b>13 Sep 2023</b>	08 Aug 2023	03 Aug 2023
Machine Age	hrs	Client Info	<b>6792</b>	6792	6792
Oil Age	hrs	Client Info	<b>295</b>	256	469
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	SEVERE

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>13</b>	7	11
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >9	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>18</b>	26	20
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	57	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>636</b>	543	588
Calcium	ppm	ASTM D5185m 1510	<b>1720</b>	1536	1606
Phosphorus	ppm	ASTM D5185m 780	<b>816</b>	771	789
Zinc	ppm	ASTM D5185m 870	<b>993</b>	915	988
Sulfur	ppm	ASTM D5185m 2040	<b>3160</b>	2566	3092

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>18</b>	11	21
Sodium	ppm	ASTM D5185m	<b>▲ 347</b>	▲ 196	▲ 436
Potassium	ppm	ASTM D5185m >20	<b>▲ 491</b>	▲ 241	▲ 379
Glycol	%	*ASTM D2982	<b>---</b>	---	● 0.10

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.3</b>	7.3	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.5</b>	19.5	21.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.0</b>	15.9	16.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>8.1</b>	8.0	8.1







# OIL ANALYSIS REPORT

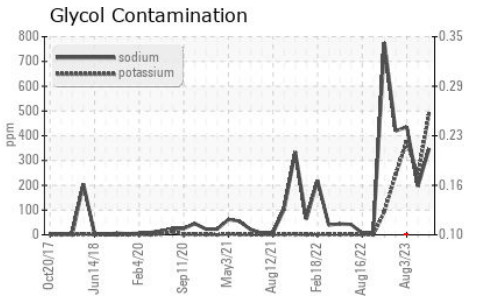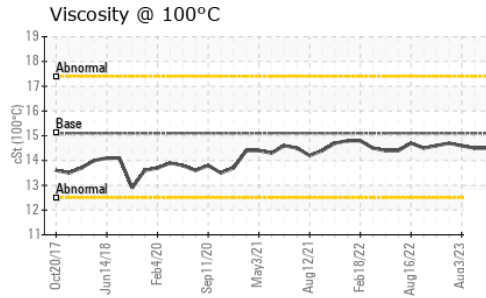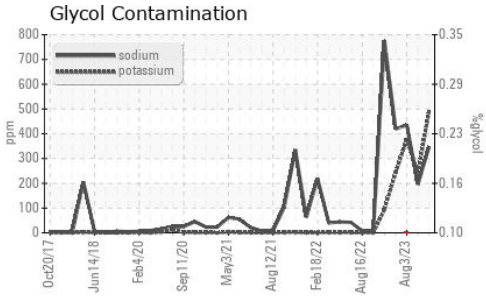

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	14.6

## GRAPHS

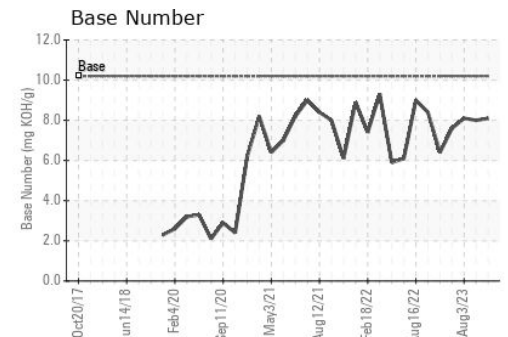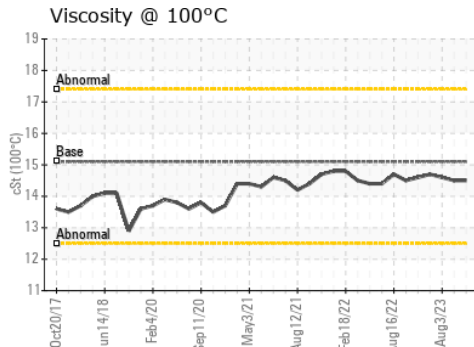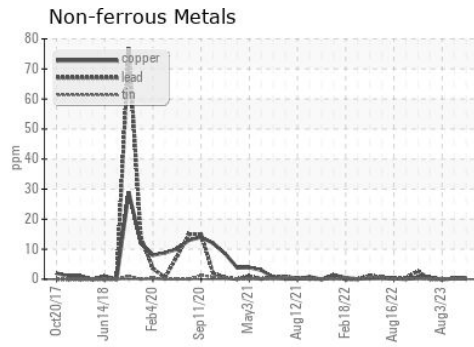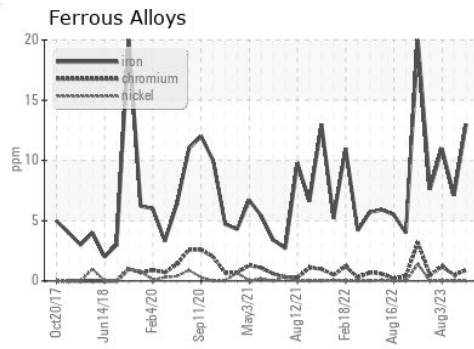

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0079612 **Received** : 13 Sep 2023  
**Lab Number** : 05950001 **Diagnosed** : 18 Sep 2023  
**Unique Number** : 10645960 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: GLYCOL )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**GFL Environmental - 017 - Durham**  
 148 Stone Park Court  
 Durham, NC  
 US 27703  
 Contact: Shane Parks  
 shane.parks@gflenv.com  
 T: (919)596-1363  
 F: (919)598-1852