

OIL ANALYSIS REPORT

Sample Rating Trend

SAMPLE INFORMATION method limit/ba







Machine Id 723023-361636

Component Transmission

Fluic

PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFOR		method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0090659		
Sample Date		Client Info		06 Sep 2023		
Machine Age	hrs	Client Info		29546		
Oil Age	hrs	Client Info		29546		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METAL	c	method	limit/base	current	history1	history2
	0				mistory	Thistoryz
Iron	ppm	ASTM D5185m	>200	72		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	16		
Lead	ppm	ASTM D5185m	>50	5		
Copper	ppm	ASTM D5185m	>200	16		
Tin	ppm	ASTM D5185m	>10	1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		96		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		94		
Phosphorus	ppm	ASTM D5185m		267		
Zinc	ppm	ASTM D5185m		4		
Sulfur	ppm	ASTM D5185m		1373		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	9		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	3		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.1	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTI <u>ES</u>	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34	35.7		
VISC @ 40 C	001		<u> </u>			

Report Id: GFL837 [WUSCAR] 05950582 (Generated: 09/19/2023 05:20:44) Rev: 1


Contact/Location: BRYAN SWANSON - GFL837



3

Viscosity @ 40°C

OIL ANALYSIS REPORT

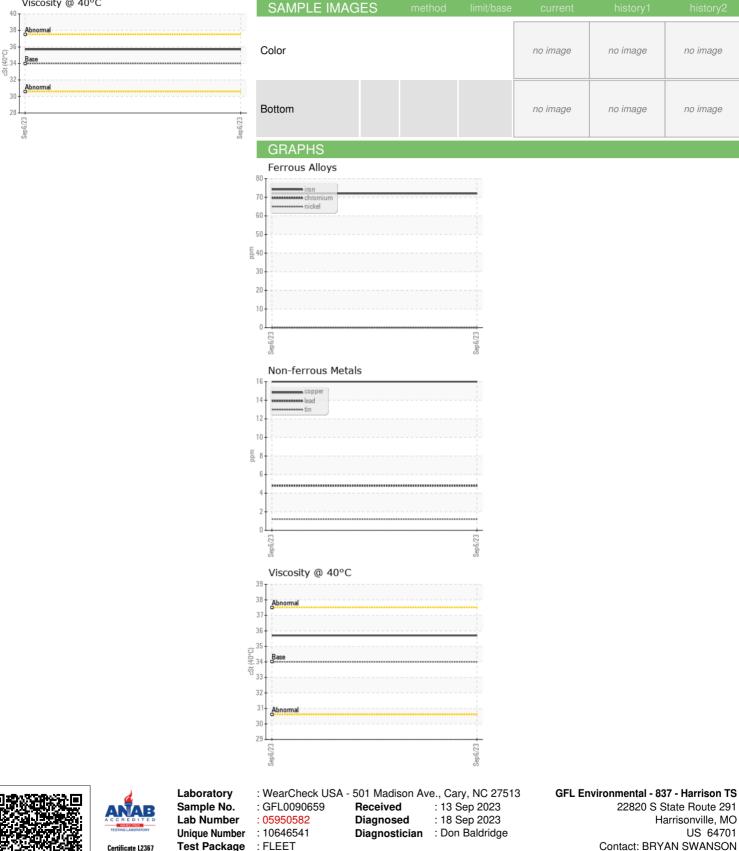

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: BRYAN SWANSON - GFL837

Т:

F:

bryanswanson@gflenv.com